
This item was submitted to [Loughborough's Research Repository](#) by the author.
Items in Figshare are protected by copyright, with all rights reserved, unless otherwise indicated.

Enhanced bio-production from CO₂ by microbial electrosynthesis (MES) with continuous operational mode

PLEASE CITE THE PUBLISHED VERSION

<https://doi.org/10.1039/d0fd00132e>

PUBLISHER

Royal Society of Chemistry (RSC)

VERSION

AM (Accepted Manuscript)

LICENCE


CC BY 4.0

REPOSITORY RECORD

Izadi, Paniz, Jean-Marie Fontmorin, Swee Su Lim, Ian Head, and Eileen Yu. 2021. "Enhanced Bio-production from CO₂ by Microbial Electrosynthesis (MES) with Continuous Operational Mode". Loughborough University. <https://hdl.handle.net/2134/13741081.v1>.

Faraday Discussions

Accepted Manuscript

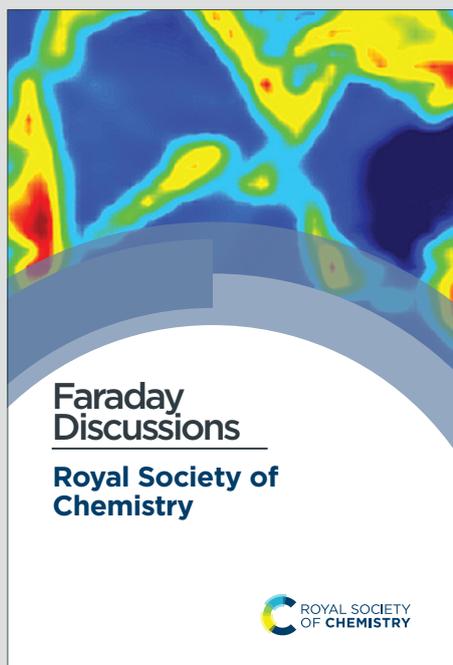

This is an Accepted Manuscript, which has been through the Royal Society of Chemistry peer review process and has been accepted for publication.

Accepted Manuscripts are published online shortly after acceptance, before technical editing, formatting and proof reading. Using this free service, authors can make their results available to the community, in citable form, before we publish the edited article. We will replace this Accepted Manuscript with the edited and formatted Advance Article as soon as it is available.

You can find more information about Accepted Manuscripts in the [Information for Authors](#).

Please note that technical editing may introduce minor changes to the text and/or graphics, which may alter content. The journal's standard [Terms & Conditions](#) and the [Ethical guidelines](#) still apply. In no event shall the Royal Society of Chemistry be held responsible for any errors or omissions in this Accepted Manuscript or any consequences arising from the use of any information it contains.

This article can be cited before page numbers have been issued, to do this please use: P. Izadi, J. Fontmorin, S. S. Lim, I. Head and E. H. Yu, *Faraday Discuss.*, 2021, DOI: 10.1039/D0FD00132E.

Enhanced bio-production from CO₂ by Microbial electrosynthesis (MES) with Continuous operational mode

View Article Online

DOI: 10.1039/D0FD00132E

Paniz Izadi^{1*}, Jean-Marie Fontmorin¹, Swee Su Lim¹, Ian M. Head² and Eileen H. Yu^{1,3*}¹ School of Engineering, Newcastle University, Newcastle upon Tyne, United Kingdom² School of Natural and Environmental Sciences, Newcastle University, Newcastle upon Tyne, United Kingdom³ Department of Chemical Engineering, Loughborough University, Loughborough, United Kingdom

Technologies able to convert CO₂ to various feedstocks for fuels and chemicals are emerging due to the urge of reducing greenhouse gas emissions and de-fossilizing chemical production. Microbial electrosynthesis (MES) has been shown a promising technique to synthesize organic products particularly acetate using microorganisms and electrons. However, the efficiency of the system is low. In this study, we demonstrated the simple yet efficient strategy in enhancing the efficiency of MES by applying continuous feeding regime. Compared to the fed-batch system, continuous operational mode provided better control of pH and constant medium refreshment, resulting in higher acetate production rate and more diverse bio-products, when the cathodic potential of -1.0 V Ag/AgCl and dissolved CO₂ were provided. It was observed that hydraulic retention time (HRT) had a direct effect on the pattern of production, acetate production rate and coulombic efficiency. At HRT of 3 days, pH was around 5.2 and acetate was the dominant product with the highest production rate of 651.8 ± 214.2 ppm day⁻¹ and a significant coulombic efficiency of 90%. However at the HRT of 7 days, pH was lower at around 4.5, and lower but stable acetate production rate of 280 ppm day⁻¹ and a maximum coulombic efficiency of 80% was obtained. In addition, more diverse and longer chain products, such as butyrate, isovalerate and caproate, were detected with low concentrations only at the HRT of 7 days. Although microbial community analysis showed the change in the planktonic cells communities after switching the fed-batch mode to continuous feeding regime, *Acetobacterium* still remained as the responsible bacteria for CO₂ reduction to acetate, dominating the cathodic biofilm.

Introduction

Adverse effects of CO₂ emission in the atmosphere on environment such as climate change have raised the urgent demand on new technologies to capture CO₂. Different methods have been suggested and studied in order to either capture or utilize CO₂ from the atmosphere¹. Electrochemical technologies are one of the known techniques for CO₂ reduction using chemical catalysts. However the utilisation of these chemicals is associated with sustainability issues and lack of robustness, in addition to the cost of the chemical catalysts themselves. Additionally, products from electrochemical methods are typically limited to one-carbon compounds such as formate, methanol, and unsaturated two-carbon compounds such as ethylene, as recently reported². Bio-electrochemical systems (BESs) have provided biological and electrochemical approach towards CO₂ reduction using microorganisms as catalysts^{3, 4}. Acetogenic microorganisms are able to produce medium and long chain organics such as acetate, butyrate, caproate and their respective alcohols from CO₂ as a carbon source and a



polarised cathode as an energy source⁵. Production of these valuable compounds with significant commercial applications from CO₂ can contribute towards circular economy. Acetate is the major product of CO₂ reduction *via* microbial electrosynthesis (MES) following Wood-Ljungdahl pathway⁶. Production of longer chain organics than acetate through MES was reported in previous studies by controlling fermentation pathways^{3, 7}. However, chain elongation in BES and selectivity in production of C4 or C6 organics is still the major challenge. It has been reported in previous studies that operational conditions provided in BES have an important effect not only on enrichment of desired microbial communities but also on selectivity of products⁸. pH is one of the key operational parameters affecting microbial metabolisms. Optimal pH for production of acetate through acetogenesis mechanism is reported between 5.0 and 7.0⁹. On the one hand, it was reported that acidic pH can inhibit metabolisms of *Clostridium* and subsequently chain elongation through acetate¹⁰. On the other hand, it was proposed that it can enhance the production of alcohols in the system by switching microbial metabolism from acetogenesis to solventogenesis¹⁰⁻¹³. To prevent the accumulation of acidic products and control the pH of catholyte different strategies such as designing three-chamber reactors were investigated^{14, 15}. Continuous operational mode is another solution for controlling the pH in BES. Continuous feeding of fresh medium is a proper method not only to extract the products accumulated in the system, but also to constantly provide fresh growth medium and CO₂ to microbial communities involved in the MES processes. We have shown in our previous study that compared with bicarbonate, gaseous CO₂ leads to higher abundance of *Acetobacterium*, by improving the protein synthesis of bacteria¹⁶. In addition, availability of inorganic carbon for bacterial communities is important as some acetogens cannot grow unless CO₂ is promptly accessible⁶. However, selection of hydraulic retention time (HRT) is an important factor in continuous mode, as a fast flow rate can wash out the microbial communities from a cathodic compartment in case of absence of biofilm and presence of planktonic cells responsible for MES. In a previous study by Bajracharya et al¹⁷, higher acetate production rate (149 mg L⁻¹ day⁻¹) was achieved over batch experiments compared to that in continuous operational mode. However in their study, the acetate production was not stable over the long-term continuous mode due to the removal of microbial communities in suspension responsible for MES. Similar results were reported by Arends et al¹⁸. As planktonic microbial cells were responsible for MES in their study, the authors reported the decrease in biomass and the consequent drop in acetate production at the HRT of 2.9 ± 0.3 days¹⁸. Conversely, in our previous study, we showed that microbial communities responsible for MES processes were enriched at the surface of the cathode, developing a dense and highly conductive biofilm¹⁶. Almost 50% of the bacterial communities in the biofilm were composed of *Acetobacterium*, and acetate was the major product with the average coulombic efficiency of 69% while pH was around 5.8. However, lower pH than 5.8 seemed to decrease the efficiency¹⁶. Additionally, chemical electron donors such as ethanol provided in BES were shown as key energy sources for production of longer chain compounds than acetate under controlled pH although with negligible concentrations¹⁹. Therefore, in order to control the pH and optimize the system's efficiency regarding acetate production, and particularly steering the production towards longer chain compounds, continuous feeding strategy was carried out in this work. We hypothesized that switching from fed-batch to continuous operational mode could provide optimal conditions for the cathodic biofilm by removing the acidic products and flushing fresh nutrients, leading to an improvement of the production from CO₂. Therefore, the effect of continuous operational mode on production and efficiency was investigated in this

View Article Online
DOI: 10.1039/D0FD00132E

Faraday Discussions Accepted Manuscript



study. Due to the importance of HRT in controlling the pH, different HRTs were applied during the operation and their effect on production were investigated. In addition, the electrochemical feature of the biofilm developed during continuous feeding regime and microbial composition in the catholytes were compared with them observed after fed-batch mode.

View Article Online
DOI: 10.1039/D0FD00132E

Material and methods

BES operation

Reactors in this study were designed and operated as previously described¹⁶. Briefly, each reactor was a Perspex dual chamber cells with net volume of 80 ml. Each chamber had a 70 ml glass vessel attached on top used as a headspace. Chambers were separated by a cation exchange membrane (FUMASEP-FKB-PK-130, Fumatech, Germany). Cathode was graphite felt (VWR, Cat. No. 43200.RR, Alfa Aesar) with a projected surface area of 4.9 cm² and anode was a platinum mesh with the same size as the cathode connected to titanium wire as a current collector. Reference electrode of Ag/AgCl saturated in 3 M NaCl (+0.210 V vs. Standard Hydrogen Electrode, SHE, RE-5B, BASi, USA) was placed in the cathodic compartment. All the potentials in this study are reported vs. Ag/AgCl. The BESs were operated in duplicate and all the results were reported in average of the replicates.

The cathodic medium consisted of K₂HPO₄ (0.35 g L⁻¹), KH₂PO₄ (0.25 g L⁻¹), NH₄Cl (0.25 g L⁻¹), KCl (0.5 g L⁻¹), CaCl₂·2H₂O (0.15 g L⁻¹), MgCl₂·6H₂O (0.6 g L⁻¹), NaCl (1.2 g L⁻¹), yeast extract (0.01 g L⁻¹), Trace metal solution (1 ml/L), Vitamin solution (2.5 ml L⁻¹), Tungstate-selenium solution (0.1 ml L⁻¹)²⁰. Cathodic compartments were inoculated by the catholyte (40 ml) of the reactors in our previous study¹⁶. pH of the initial medium before starting the experiment was adjusted to around 5.8. No chemical methane inhibitor was added to the cathodic medium, as an acidic pH was shown as an efficient method to suppress methanogens^{16, 21}. The oxygen produced throughout the experiment in the anodic compartment was removed by purging the anolyte continuously by N₂. Reactors were operated at the controlled temperature of 35 °C by employing incubator.

Reactors were started and operated in fed-batch mode until acetate production was observed (14 days) by purging CO₂/N₂ (90/10) in catholytes for 20 minutes every 2.5 ± 0.5 days. Afterwards operational mode was switched to continuous feeding regime using an aquarium dosing pump. HRT of the pump was first adjusted at 3 days, which was sufficient for maintaining the catholyte's pH at around 5.8. After 42 days at the HRT of 3 days, retention time was changed to 7 days to compare the production at different retention times.

Analytical methods

Concentrations of organic acids (C1 to C6) in liquid samples were measured using ion chromatography (Eco IC, Metrohm, Switzerland) equipped with the METROHM 6.1005.200 column and autosampler. Gas chromatography (GC-2010, Shimadzu Tracera, Japan) equipped with Barrier Discharge Ionization (BID) detector, autosampler and the Zebron ZB-WAXplus capillary column (Phenomenex) was used to measure and detect acetone and alcohols (C1 to C6). Gas samples were analysed using a gas chromatography (GC-2010, Shimadzu Tracera, Japan) equipped with Barrier Discharge Ionization (BID) detector and ShinCarbon ST micropacked column 80/100 (Restek) to detect the gas (H₂, N₂, O₂, CH₄ and CO₂) in the



headspaces of the reactors. To measure total inorganic and organic carbon in the solutions, a TOC 5050A Total Organic Carbon analyser (Shimadzu, Japan) equipped with ASI-5000 autosampler was used. pH of the liquid samples were measured after each sampling, using HI 9025 pH meter (Hanna Instruments, USA) with a pH probe (11542543; Fisher-Scientific, UK) calibrated between 2.0 and 9.0.

Electrochemical analysis

To compare the electrochemical activity of the biofilm formed after the fed-batch mode and the biofilm developed further after the continuous feeding regime, cyclic voltammetry (CV) was performed from the cathodes at the end of continuous operational mode experiment and compared with the CV performed at the end of batch-fed mode (previous study¹⁶) and plain electrode. Before the analysis, 50% of the catholyte was refreshed and pH was adjusted at around 6.7 to discard the effect of pH on the CV results. The scan rate was set at 2 mV s⁻¹ with the potential step of 0.5 mV and the second scan was reported.

Biological analysis

At the end of experiment in this study, 3 ml samples were collected from the catholytes for further biological analysis. Samples for cell count analysis were fixed in 50% ethanol immediately after collection. The number of the planktonic cells was measured using flow cytometry with Accuri C6 flow cytometer (BD Biosciences). Samples were prepared for flow cytometry following the sample preparation step as reported in the previous study²² and stained by SYTO 9 green fluorescent nucleic acid stain. Negative control (stained sterile filtered EDTA) was prepared to separate the signals of the cells from the background noise through electronic gating. To verify the identity of bacterial communities in the planktonic cells, DNeasy PowerWater Kit (14900-100-NF, QIAGEN, Germany) was used to extract DNA of the samples by filtering the samples through 0.2 µm nylon membrane filters using filter holders (Swinnex, China) and placing the filters in the kits. The communities of samples were sequenced by Illumina MiSeq sequencing through evaluating the V4 region of 16S rRNA (Northumbria University, UK). The Illumina MiSeq sequencer produced 2 x 250 bp paired end reads with V2 chemistry. The data from Illumina MiSeq were processed using the pipeline of ‘‘Dada 2’’ package in R statistical platform. The representative sequences in each amplicon sequence variant (ASV) files were assigned using Ribosomal Database Project (RDP) with the bootstrap confidence of 80. After taxonomy assignment, the relative abundance of each taxon was determined and plotted using ‘‘phyloseq’’ package in R statistical platform²³. To plot a phylogenetic tree for selected sequences of this study and compare to highly similar sequences recovered from NCBI Nucleotide database collection, ‘‘ape’’ package after sequences alignment using ‘‘msa’’ package in R statistical platform was used²⁴⁻²⁶. Analysis of variance (ANOVA) tests were performed to assess the reliability of the data. Accuracy of the analysis was controlled by a positive control using a mock bacterial community with specific composition of bacteria (ZymoBIOMICS Microbial Community Standard). Three negative controls with no sample were used for detecting the contamination during the DNA extraction processes. When the similarity of the samples and negative controls was less than 10%, samples were considered as non-contaminated. However, higher similarity showed the contamination of the samples, therefore were removed from the analysis.



Results and discussion

Effect of continuous operational mode on production through MES (HRT: 3 days)

View Article Online

DOI: 10.1039/D0FD00132E

Reactors were started on fed-batch mode for 2 weeks until notable acetate production was observed. Inoculating from the active and developed biocathode led to the rapid start-up of the BESs in cathodic electron uptake and production of acetate. Cathodic current started from $-0.6 \pm 0.0 \text{ mA cm}^{-2}$ immediately after starting the BESs, and gradually increased to around $-1.0 \pm 0.5 \text{ mA cm}^{-2}$ at day 14 (Fig. S1). After 14 days, operational mode was switched to continuous feeding regime with HRT: 3 days. Retention time of 3 days was selected according to our previous observations, where catholytes' pH was decreasing to around 4.8-5.0 after approximately 3 days. Therefore, HRT of 3 days was chosen to prevent the highly acidic condition in catholytes. During the experiment of continuous feeding regime, cathodic current varied between -1.0 and -1.5 mA cm^{-2} until day 56, the last day of applying HRT of 3 days.

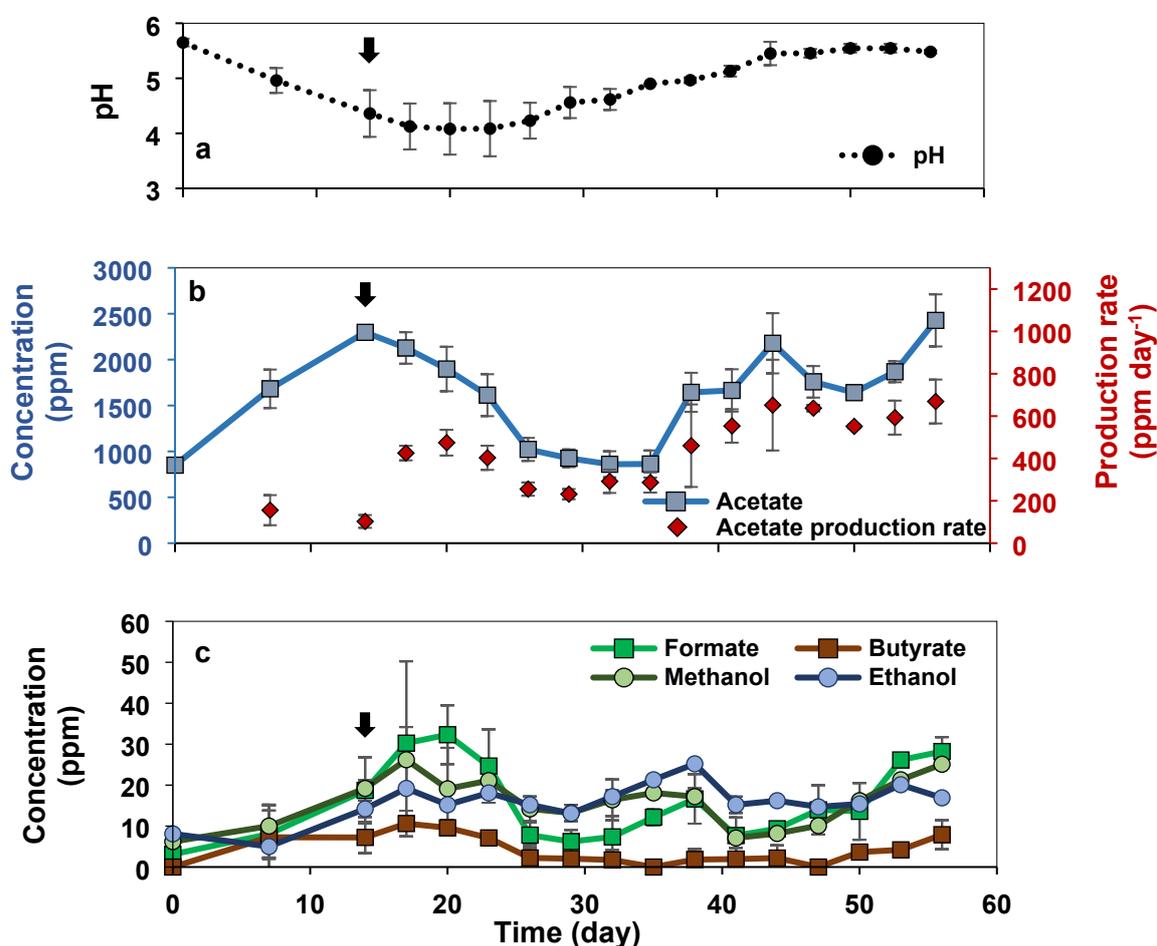


Fig. 1 (a) pH, (b) acetate concentration and production rate and, (c) other products than acetate detected in the BESs poised at -1.0 V and fed by CO_2 before and after changing to continuous operational mode at HRT of 3 days. Black arrows show the time when operational mode was switched from fed-batch to continuous. The error bars represent the standard deviation calculated from duplicate samples in two reactors.



During the first 14 days of the experiment acetate was the major product detected in the catholytes, reaching the concentration of 2297.3 ± 29.5 ppm (76.5 ± 0.9 mmole C L⁻¹) at day 14, with acetate production rate of 155.2 ± 71.0 and 102.1 ± 30.2 ppm day⁻¹ at day 7 and 14, respectively (Fig. 1). After switching the operational mode to continuous on day 14, acetate concentration began to decrease due to removal of the acetate accumulated in the catholytes. However, after day 35, acetate production rate began to increase again, reaching the maximum production rate of 651.8 ± 214.2 ppm day⁻¹ (21.7 ± 7.14 mmole C L⁻¹ day⁻¹), with the maximum of 803.3 ppm day⁻¹ (26.8 mmole C L⁻¹) in one of the duplicates on day 44, 30 days after switching the operation to continuous mode. In addition, over the first 14 days of fed-batch mode catholytes' pH dropped from 5.6 ± 0.0 at day 1 to 4.4 ± 0.4 at day 14 (Fig. 1). After switching from fed-batch to continuous mode, the constant removal of products from the catholytes and feeding fresh medium could successfully adjust the pH around 5.5. The higher acetate production rate observed in continuous mode was also associated with a significant increase in coulombic efficiency (Fig. 2). In fed-batch mode, the coulombic efficiency was 58.4 ± 23.0 % (averaged on the first 14 days). After switching the operational mode to continuous with HRT of 3 days, acetate concentration in the solution began to decrease (average of 55.2 ± 14.8 % coulombic efficiency between days 14 and 35) most likely due to the removal of biomass. However, coulombic efficiency slowly increased and reached the average value of 83.2 ± 10.5 % between days 35 and 56, which was the highest value during the experiment (maximum of 90 % in one of the duplicates). This was the highest coulombic efficiency achieved in this study, indicating the positive impact of continuous feeding regime on the efficiency of MES.

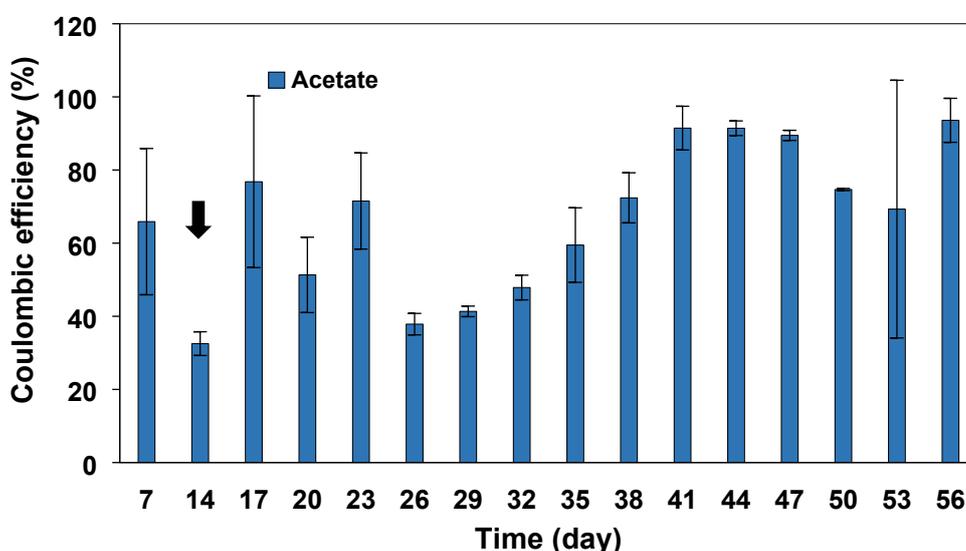


Fig. 2 Coulombic efficiency of BESs during the experiment of continuous operational mode (HRT: 3 days). Black arrow shows the time when operational mode was switched from fed-batch to continuous. The error bars represent the standard deviation calculated from duplicate samples in two reactors.

Over 14 days of fed-batch mode and 42 days of continuous operational mode with HRT: 3 days, acetate was the major product detected in the solution, and no H₂ was found in the headspaces. Trace concentration (less than 40 ppm) of formate, butyrate, methanol and ethanol



were detected irregularly in the catholytes, with no significant change in the production patterns over the first 56 days (Fig. 1 (c)). The number of cells in the catholytes measured by flow cytometry on day 14, before switching the operational mode, and on day 56, last day of continuous mode at HRT of 3 days, was almost similar, indicating the persistent cells growth. The cells number was around $5.5 \times 10^7 \pm 4.5 \times 10^7$ on day 14 and $1.1 \times 10^7 \pm 4.6 \times 10^6$ on day 56. Slight decrease in the number of the cells could be due to the removal of biomass accumulated in suspension.

Effect of continuous operational mode on production through MES (HRT: 7 days)

After 42 days operation of continuous flow with HRT 3 days, the retention time was changed to a longer period of 7 days. Comparing the results of HRT 3 and 7 days could show the impact of retention time on production through MES.

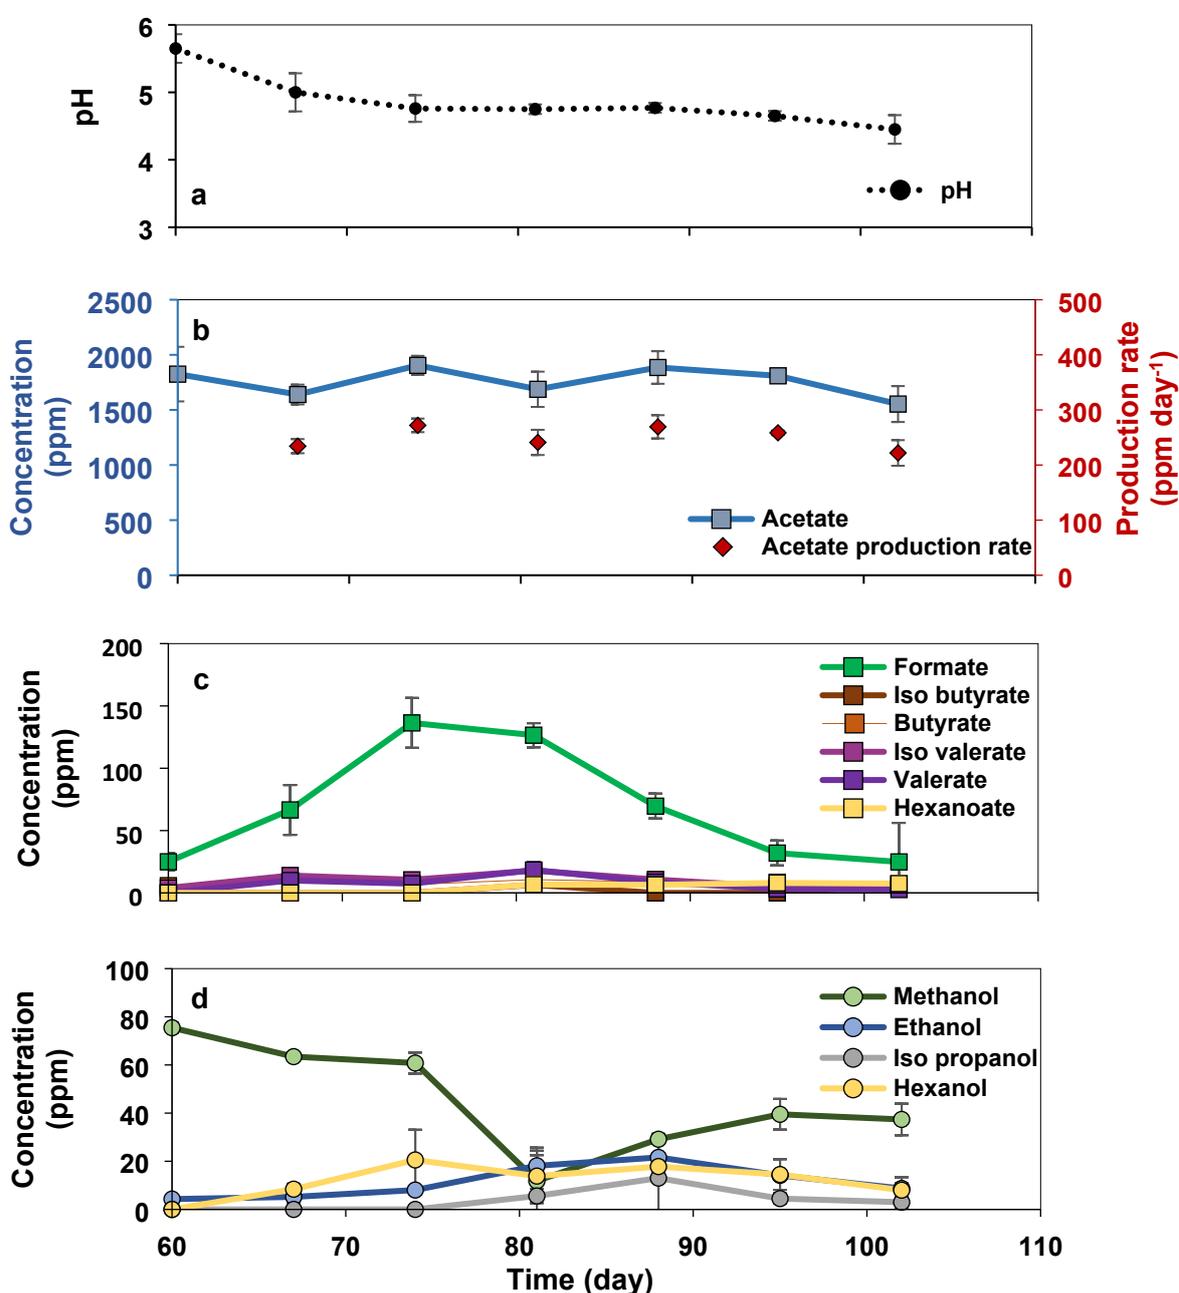


Fig. 3 (a) pH, (b) acetate concentration and production rate, (d) carboxylic acids, and (e) alcohols detected in the BESs poised at -1.0 V and fed by CO₂ at continuous operational mode at HRT of 7 days. The error bars represent the standard deviation calculated from duplicate samples in two reactors.

View Article Online
DOI: 10.1039/D0FD00132E

Current density at HRT: 7 days was around -1.0 mA cm⁻² (Fig. S2). During the experiment at HRT: 7 days, acetate concentration detected in the solution was lower but more stable than that detected in BESs at HRT: 3 days. The highest acetate concentration (1904.1 ± 86.2 ppm (63.5 ± 2.8 mmole C L⁻¹)) was achieved on day 74 of the experiment corresponding to a production rate of 272.0 ± 12.3 ppm (9.1 ± 0.4 mmole C L⁻¹). This difference in acetate production could be due to an accumulation of products and a drop in pH during HRT of 7 days (less than 5), which is known for providing toxic conditions for acetogenic activity²⁷⁻²⁹. Formate was detected with higher concentration than that observed in HRT: 3 days, at around 140 ppm, 15 days after switching the retention time to 7 days, however its concentration was not stable. Applying longer retention time led to pH drop to around 4.3-4.7 during the experiment. This was associated with production of diverse products of butyrate, iso butyrate, valerate, iso valerate, hexanoate and hexanol, which were not detected in the reactors at HRT of 3 days. Although the concentration of these products was less than 25 ppm, it was the first time that C6 products were detected during this experiment. It is highly probable that acetate was converted to ethanol under highly acidic condition over solventogenesis mechanism, which was further consumed for production of C4 products with acetate³⁰. Presence of butyrate and ethanol in the solution could result in further chain elongation and production of C6 products³⁰. However, the trace concentration of C4 and C6 products in our reactors could be related to the negligible abundance of *Clostridium* (<1%) compared to acetate producing community of *Acetobacterium* found in the initial inoculum¹⁶. Similar observation was reported in a previous study¹⁰, in which the authors discussed that pH lower than 5.0 ceased the production of long chain VFAs and promoted the production of alcohols through solventogenesis mechanism. The production of C5 products in our study was highly related to *Prevotella* found in the initial inoculum and known for production of propionate as discussed elsewhere¹⁶. Propionate can be further elongated to C5 products using methanol or ethanol³¹. In addition, the number of cells in the catholytes increased slightly to $3.9 \times 10^7 \pm 1.8 \times 10^6$ after 42 days operation at HRT: 7 days compared to that observed over HRT: 3 days, most likely indicating the accumulation of growing biomass in the suspension. However, coulombic efficiency of the system in acetate production improved during continuous feeding regime compared to that at fed-batch mode. Due to the low concentration of other products than acetate and lack of detection of hydrogen in BESs, coulombic efficiency was calculated considering the acetate production as illustrated in Fig. 4. Similar to HRT: 3 days, coulombic efficiency was higher than that obtained for fed-batch mode, with the highest value of approximately 81% over the last 21 days. This was slightly lower than that calculated for HRT: 3 days, which can be explained by the fact that acetate (used for the coulombic efficiency calculations) was further elongated to longer compounds.



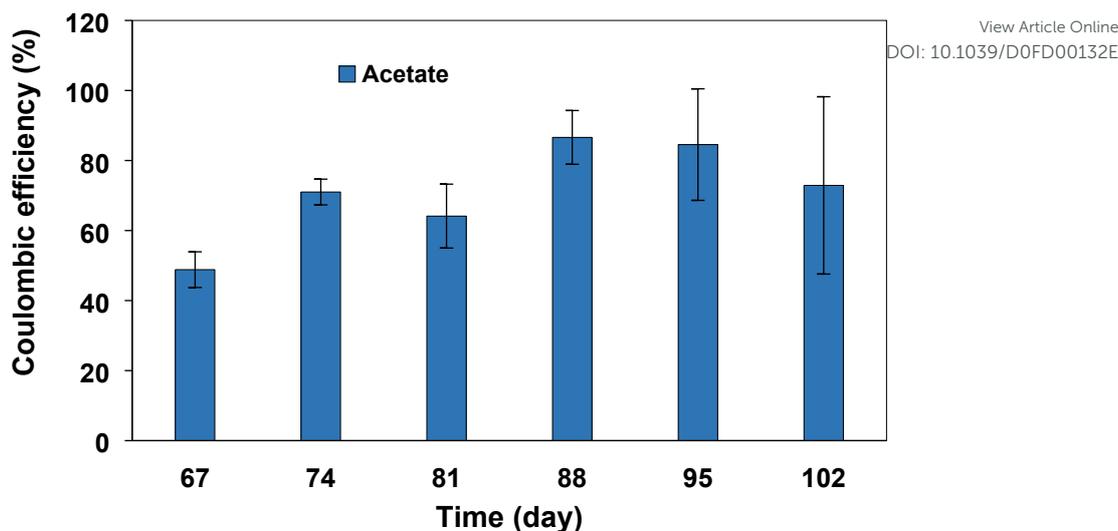


Fig. 4 Coulombic efficiency of BESs during the experiment over the continuous operational mode (HRT: 7 days). The error bars represent the standard deviation calculated from duplicate samples in two reactors.

Effect of continuous operational mode on electrochemical properties of biofilms

During the continuous feeding regime, mature biofilms developed at the surface of cathodes which were visible to the naked eyes (Fig. S3). Formation of dense biofilms at the cathode could be a result of constant supply of fresh nutrients for the microbial communities. The significant correlation between the biofilm density developed at the cathode and acetate production yield was clearly demonstrated in our previous study¹⁶, which justifies the superior performance of the BESs over continuous feeding regime. Development of a dense biofilm at the surface of the cathodes raised the question of the difference in electrochemical properties of the biofilms developed in different operational mode conditions. Therefore, CV was performed on the plain electrode prior to the beginning of the experiment and on the electrode with the biofilm after 102 days of experiment (Fig. 5). The voltammograms were also compared with that from the electrodes covered with a biofilm after 104 days of fed-batch mode reported in our previous study¹⁶. For CV analysis, pH in the reactors was manually adjusted to around 6.5 to avoid any implication of pH on CV results. As observed in Fig. 5, a significant shift in H₂ evolution onset potential could be observed. The onset potential of H₂ evolution was near -1.0 V on the plain electrode and shifted to -0.8 V at the end of fed-batch experiment. This shift was even more significant at the end of continuous feeding regime experiment to *ca.* -0.6 V. This could be related to the significant abundance of *Acetobacterium*, which it was shown its enzymatic activity at the surface of the cathode led to higher enzymatic production of intercellular H₂¹⁶. H₂ is an energy source for acetogens according to equation (1).



Although it was primarily suggested that acetogens can uptake electron directly from polarised cathode in BES³², we showed in our previous study that acetogens gain electrons most likely



in form of H₂ produced extracellularly and also intracellularly for CO₂ reduction¹⁶. Considering the importance of H₂ as an energy source in MES, CV results in this study strongly confirmed the positive effect of continuous feeding regime on biological production of H₂, even though no H₂ was detected in the headspaces of the BESs showing its consumption through MES processes. This justifies more significant production rate of acetate during continuous operational mode compared to fed-batch mode.

Open Access Article. Published Online
DOI: 10.1039/D0FD00132E

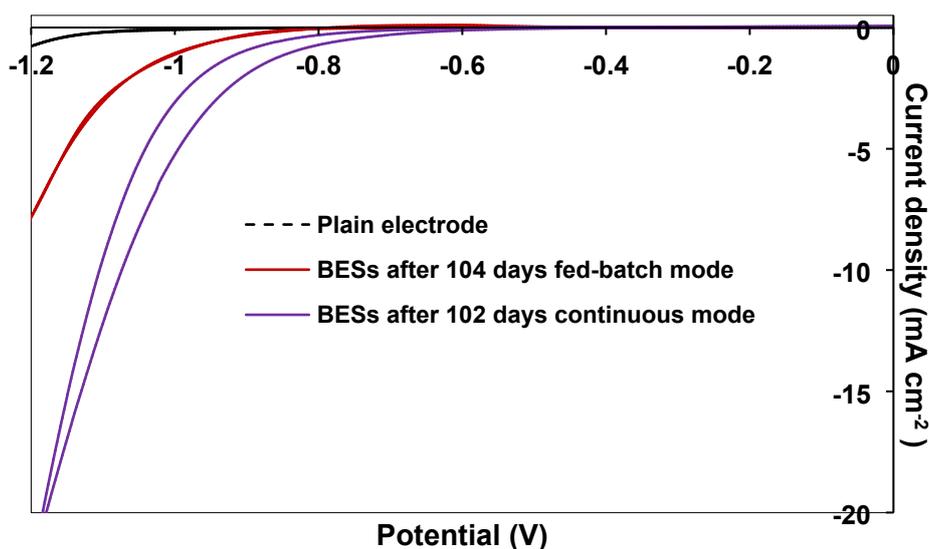


Fig. 5 Cyclic voltammograms recorded on the plain electrode, cathode with biofilm formed after 102 days at continuous operational mode and cathode with biofilm formed after 104 days at fed-batch mode (our previous study¹⁶).

Bacterial communities in planktonic cells

Initial inoculum used for this study was dominated by *Acetobacterium* responsible for production of acetate through MES. It was shown in our previous study that *Acetobacterium* grow as a dense and efficient biofilm at the surface of polarised cathodes under optimal conditions (gaseous CO₂, cathodic potential of -1.0 V, and slightly acidic pH (ca. 5.8)), while lower abundance of *Acetobacterium* (ca. 7 %) was still detected in the bulk¹⁶. Therefore, it was assumed that inoculating the BES with previously enriched catholyte and imposing the favourable conditions for *Acetobacterium* growth would lead to the formation of biofilm also dominated by *Acetobacterium* while lower abundance would be found in the catholytes.



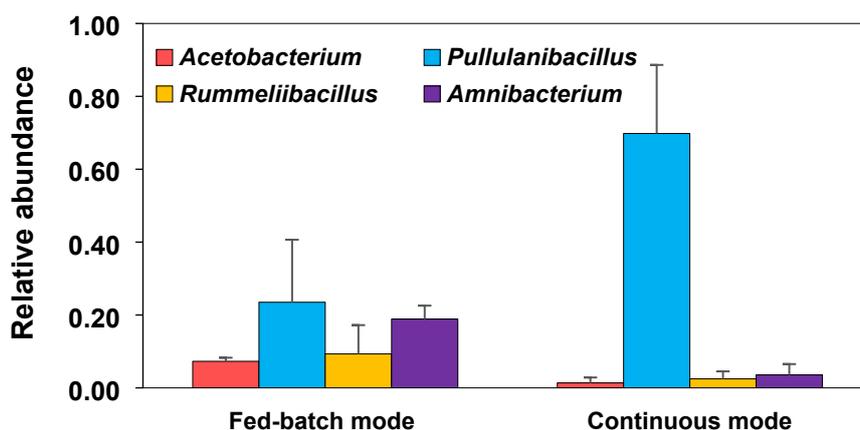


Fig. 6 Relative abundance of the most abundant microbial communities obtained from Illumina sequencing of 16S rRNA genes from planktonic cells of bio-electrochemical reactors after 102 days experiment of continuous operational mode compared to planktonic cells after 104 days in fed-batch mode from our previous study¹⁶. The error bars represent the standard deviation calculated from duplicate samples in two reactors.

The relative abundance of *Acetobacterium* in planktonic cells of the catholytes (*ca.* 1%) in this study was slightly lower than that in fed-batch mode (Fig. 6). This could be due to the removal of biomass from the solution over continuous operation. In addition, this could confirm the fact that *Acetobacterium* tend to grow and form biofilm at the surface of the cathode, where H₂ produced intercellularly and extracellularly is highly available as an energy source¹⁶, justifying the significant acetate production over continuous mode. However, the most significant change in microbial communities of planktonic cells was related to development of *Pullulanibacillus*. Detected as the most abundant genus in the catholytes, it comprised $69.8 \pm 1.3\%$ of microbial communities, while it was only $23.5 \pm 2.2\%$ in the initial inoculum. *Pullulanibacillus* is classified in the family of *Bacillaceae_2* which is the spore-forming bacteria from *Firmicutes* with the optimum temperature of 37 °C and acidic pH of around 4.5³³⁻³⁵. By far, little is known about *Pullulanibacillus*, however highly similar sequence was found in the acetate producing bioreactors from CO₂ and H₂ with acidic pH similar to operational conditions in the BESs of our study³⁵. In addition, continuous flushing of fresh medium could decrease the abundance of a fermentative bacteria such as *Amnibacterium* or *Rummeliibacillus* known to be correlated to presence of butyrate and iso propanol as discussed by Arends et al¹⁸. Results from the community analysis of planktonic cells in the catholytes, together with the significant enhancement in acetate production over the continuous mode in our study proposed that continuous mode provided the optimal condition for the growth of *Acetobacterium* not in the catholytes but at the cathodes, where more H₂ is available. However, long-term acidic condition in the cathodic compartment seemed to develop a fermenter of *Pullulanibacillus* which its role in MES requires further studies.

It is worth mentioning that, although no chemical methane inhibitor was used in the medium, no *Archaea* was found in the catholytes of this study confirming the successful suppression of methanogens in the BESs under acidic conditions. Additionally, negligible concentration of



longer chain products than acetate seemed to be due to the low abundance of *Clostridium* (< 2%) found in the reactors.

View Article Online

DOI: 10.1039/D0FD00132E

Effect of continuous operational mode on BES performance

It was previously observed that a slightly acidic medium (pH between 5.5 and 5.8) could provide optimal conditions for acetogenic growth and subsequently MES processes¹⁶. Similar result was also reported in other studies^{36, 37}. In this work, switching the operational mode from batch to continuous feeding regime showed the promising strategy for improvement in acetate production and efficiency of the system. Highest acetate production rate (803.3 ppm day⁻¹) in the experiment was achieved with the continuous operational mode at HRT of 3 days when pH was stabilised at around 5.5. In addition, achieving a coulombic efficiency of more than 80 % showed the significant improvement of the efficiency of the system with the continuous operational mode at both retention times of 3 and 7 days in comparison with that (maximum ~ 69 %) over fed-batch operation observed previously¹⁶. The Wood-Ljungdahl pathway is the only CO₂ fixation pathways that is contributing to energy conservation³⁸. Indeed, cell growth and production of acetate from CO₂ is coupled with ATP formation. Therefore, higher biomass turnover rate can lead to enhancement in the performance of BESs in terms of electron recovery and acetate production³⁸. By comparing two HRTs of 3 and 7 days, it could be concluded that a shorter retention time implied higher removal rate of biomass and products, and providing soluble CO₂ constantly available, leading to higher energy demands for microorganisms and thus higher growth rate. Providing soluble CO₂ is postulated as a key reason for optimizing the system. Removal of acetate from the catholytes, the major product during continuous flow experiment, and providing soluble CO₂ could divert the acetate production reaction (equation 1) from CO₂ to higher production of acetate to achieve the equilibrium. Similar trend was observed in other studies, in which continuous operational mode enhanced the production of organics from soluble CO₂ and chain elongation (production of C₄ and C₆ products) significantly⁸, or C₄ production in the bio-electrochemical reactor³⁹. Arends et al.¹⁸ reported the highest acetate production rate at the lowest HRT (3.3 days), and detection of longer chain products such as isopropanol and butyrate during longer retention time than 3.3 days. However, as H₂ was the second significant product in their study, coulombic efficiency based on acetate production (~ 63%) was lower than that calculated in our study. Although continuous feeding regime strategy in our study was applied to steer the production towards longer chain products, acetate was still the major product most likely due to the microbial communities dominated by *Acetobacterium* enriched from initial inoculum. This could also be related to the shorter term of experiment (102 days) in our study compared to previous studies operated for more than 200 days^{8, 40, 41}.

Selective and efficient production of organic compounds from CO₂ through MES is one of the challenges in cathodic applications of BESs. So far, different studies reported the production of organic compounds from CO₂ through MES¹. However, reaching a high selectivity, particularly towards compounds longer than acetate is still a challenge. Several methods have been proposed and investigated to steer the production towards longer chain organics, such as controlling pH, optimising different operational modes or developing strategies to quickly and efficiently grow mature biofilms through anodic reactions before switching polarisation⁴². It should be noted that switching the polarity of the electrode to develop cathodic biofilms typically lead to development of methanogens⁴³. However, from an economical point of view, the production of organic fatty acids are more favourable than methane. Feeding regime



optimisation seems to be one of the key methods for the selectivity of the products, not only by providing constant CO₂ for bacterial activity, but also by regularly flushing fresh nutrients for microorganisms, in addition to removing the products which provide toxic conditions for microorganisms^{44, 45}. In addition, the constant removal of the products also affects the pH of the catholyte, an important factor on microbial activities. Jourdin et al. reported maximum acetate, butyrate and caproate production rates of $9.8 \pm 0.65 \text{ g L}^{-1} \text{ day}^{-1}$, $3.2 \pm 0.1 \text{ g L}^{-1} \text{ day}^{-1}$, and $0.95 \pm 0.05 \text{ g day}^{-1} \text{ L}^{-1}$, respectively⁴⁰. The authors suggested that the continuous extraction of products and providing fresh nutrients led significantly contributed to the formation of a dense biofilm responsible for such a high production. The selective production of butyrate and caproate was further studied by Jourdin et al by controlling the HRT and CO₂ feeding⁸. Although operational conditions play key roles in the selectivity of the products as observed in this study, the nature and selectivity of the products strongly depend on the microbial communities enriched in biocathodes, either in biofilms or planktonic cells. For instance, the production of longer chain products such as caproate and caprylate in BES was explained by *Clostridium kluyveri* dominating mixed population of microorganisms, in which both acetate and CO₂ were provided for microbial communities⁴⁶. However, it seemed that optimizing the operational conditions of BES by applying continuous feeding regime in our study could not improve the growth of *Clostridium*, leading to low concentration of longer chain compounds than acetate. One reason could be the H₂ partial pressure affecting the growth of different microbial communities. It was discussed in a recent study that *Clostridium* requires high H₂ partial pressure for growth⁴⁷, which explains the enrichment of *Clostridium* from mixed communities and in turn the production of C4 and C6 compounds observed in gas fermentation bioreactors^{48, 49}, in contrast to lower H₂ partial pressure in cathodic BES compartments. Although H₂ production increased significantly according to CV results in our system, it probably was consumed for acetate production mainly by *Acetobacterium* dominating the biofilm communities. However, compared to gas fermentation bioreactors, BESs have the advantage of providing available and constant energy source⁵⁰⁻⁵². In addition, as H₂ seems to be the main electron mediator between the cathode and microbial communities¹⁶, enhancing H₂ production at the cathode could force the cathodic reactions towards long chain compounds production. This was suggested by Kracke et al. by studying the biocompatible catalysts for improvement of H₂ evolution⁵³. At the cathodic potential of -1.1 V, H₂ production and consequently acetate and methane production from *S. ovata* and *M. maripaludis*, respectively, were significantly enhanced through MES at a fed-batch mode⁵³. Combining such a technology under continuous feeding regime can be an interesting approach to improve *Clostridium* enrichment from mixed population of microorganisms in bio-electrochemical reactors, contributing in steering the production toward longer chain organics.

Conclusion

In this study, we demonstrated a simple yet effective strategy for improving the efficiency of microbial electrosynthesis particularly for acetate production by applying continuous feeding mode. Hydraulic retention time showed to have an important effect on the production by helping to control the pH. Production of acetate from CO₂ in bio-electrochemical system was increased significantly at the retention time of 3 days and reached the maximum coulombic efficiency of *ca.* 90%. Lower coulombic efficiency for acetate production (*ca.* 81%) but more diverse products (butyrate, iso butyrate, valerate, iso valerate, hexanoate and hexanol),



although with trace concentrations, were observed at the retention time of 7 days. No H₂ was detected in the reactors during 102 days of experiment, when cyclic voltammetry showed a notable shift in H₂ onset potential (*ca.* 400 mV) at the end of experiment, indicating its consumption over the organics production, which justified the significant improvement of the overall efficiency of the system.

View Article Online
DOI: 10.1039/D0FD00132E

Conflict of Interests

There are no conflicts to declare.

Acknowledgements

The authors thank EPSRC LifesCO2R project (EP/N009746/1), EPSRC NECEM (EP/R021503/1), NERC MeteORR (NE/L014246/1) and NBIC 002POC19034. P.I thanks the Doctoral Training Awards (SAGE DTA, 2015 cohort) from Faculty of Science, Agriculture and Engineering, Newcastle University for supporting her PhD study.

References

1. Y. Jiang, H. D. May, L. Lu, P. Liang, X. Huang and Z. J. Ren, *Water research*, 2018.
2. H. S. Jeon, S. Kunze, F. Scholten and B. Roldan Cuenya, *ACS Catalysis*, 2018, **8**, 531-535.
3. J.-M. Fontmorin, P. Izadi, S. Rasul and H. Y. Eileen, *Transformations*, 2019.
4. P. Izadi and E. Yu, *Joule*, 2020, **4**, 2085-2087.
5. Y. Jiang and R. J. Zeng, *Bioresource technology*, 2018.
6. H. L. Drake, K. Küsel and C. Matthies, in *The prokaryotes*, Springer, 2006, pp. 354-420.
7. W. de Araújo Cavalcante, R. C. Leitão, T. A. Gehring, L. T. Angenent and S. T. Santaella, *Process Biochemistry*, 2017, **54**, 106-119.
8. L. Jourdin, M. Winkelhorst, B. Rawls, C. J. Buisman and D. P. Strik, *Bioresource Technology Reports*, 2019, **7**, 100284.
9. A. Balows, H. G. Trüper, M. Dworkin, W. Harder and K.-H. Schleifer, *The prokaryotes: a handbook on the biology of bacteria: ecophysiology, isolation, identification, applications*, Springer Science & Business Media, 2013.
10. R. Ganigué, P. Sánchez-Paredes, L. Bañeras and J. Colprim, *Frontiers in microbiology*, 2016, **7**, 702.
11. I. Vassilev, P. A. Hernandez, P. Batlle Vilanova, S. Freguia, J. O. Krömer, J. Keller, P. Ledezma and B. Viridis, *ACS Sustainable Chemistry & Engineering*, 2018.
12. H. Richter, M. Martin and L. Angenent, *Energies*, 2013, **6**, 3987-4000.
13. M. E. Martin, H. Richter, S. Saha and L. T. Angenent, *Biotechnology and bioengineering*, 2016, **113**, 531-539.
14. S. Gildemyn, K. Verbeeck, R. Slabbinck, S. J. Andersen, A. PrévotEAU and K. Rabaey, *Environmental Science & Technology Letters*, 2015, **2**, 325-328.
15. I. Vassilev, F. Kracke, S. Freguia, J. Keller, J. O. Krömer, P. Ledezma and B. Viridis, *Chemical Communications*, 2019.
16. P. Izadi, J.-M. Fontmorin, A. Godain, H. Y. Eileen and I. M. Head, *npj Biofilms and Microbiomes*, 2020, **6**, 1-15.



17. S. Bajracharya, K. Vanbroekhoven, C. J. Buisman, D. P. Strik and D. Pant, *Faraday discussions*, 2017, **202**, 433-449.
18. J. B. A. Arends, S. A. Patil, H. Roume and K. Rabaey, *Journal of CO2 Utilization*, 2017, **20**, 141-149.
19. P. Izadi, J.-M. Fontmorin, B. Viridis, I. M. Head and H. Y. Eileen, *Applied Energy*, 2020, 116310.
20. S. A. Patil, J. Arends, I. Vanwonterghem, J. Van Meerbergen, K. Guo, G. W. Tyson and K. Rabaey, *Environmental science & technology*, 2015, **49**, 8833-8843.
21. D. A. Jadhav, A. D. Chendake, A. Schievano and D. Pant, *Bioresource technology*, 2018.
22. M. Vignola, D. Werner, F. Hammes, L. C. King and R. J. Davenport, *Water Research*, 2018.
23. P. J. McMurdie and S. Holmes, *PloS one*, 2013, **8**, e61217.
24. E. Paradis, J. Claude and K. Strimmer, *Bioinformatics*, 2004, **20**, 289-290.
25. E. Paradis, S. Blomberg, B. Bolker, J. Brown, J. Claude, H. S. Cuong and R. Desper, *Analyses of phylogenetics and evolution, version*, 2019, **2**.
26. U. Bodenhofer, E. Bonatesta, C. Horejš-Kainrath and S. Hochreiter, *Bioinformatics*, 2015, **31**, 3997-3999.
27. M. Demler and D. Weuster-Botz, *Biotechnology and bioengineering*, 2011, **108**, 470-474.
28. S. Ge, J. G. Usack, C. M. Spirito and L. T. Angenent, *Environmental science & technology*, 2015, **49**, 8012-8021.
29. L. A. Kucek, M. Nguyen and L. T. Angenent, *Water research*, 2016, **93**, 163-171.
30. R. González-Cabaleiro, J. M. Lema, J. Rodríguez and R. Kleerebezem, *Energy & Environmental Science*, 2013, **6**, 3780-3789.
31. S. M. De Smit, K. D. De Leeuw, C. J. Buisman and D. P. Strik, *Biotechnology for Biofuels*, 2019, **12**, 132.
32. K. P. Nevin, S. A. Hensley, A. E. Franks, Z. M. Summers, J. Ou, T. L. Woodard, O. L. Snoeyenbos-West and D. R. Lovley, *Applied and environmental microbiology*, 2011, **77**, 2882-2886.
33. S. G. Pereira, L. Albuquerque, M. F. Nobre, I. Tiago, A. Veríssimo, A. Pereira and M. S. da Costa, *International journal of systematic and evolutionary microbiology*, 2013, **63**, 158-162.
34. M. Y. Galperin, *Microbiology spectrum*, 2013, **1**, TBS-0015-2012.
35. F. Zhang, J. Ding, N. Shen, Y. Zhang, Z. Ding, K. Dai and R. J. Zeng, *Applied microbiology and biotechnology*, 2013, **97**, 10233-10240.
36. H. N. Abubackar, M. C. Veiga and C. Kennes, *Biofuels, Bioproducts and Biorefining*, 2011, **5**, 93-114.
37. P. Batlle-Vilanova, S. Puig, R. Gonzalez-Olmos, M. D. Balaguer and J. Colprim, *Journal of Chemical Technology and Biotechnology*, 2016, **91**, 921-927.
38. K. Schuchmann and V. Müller, *Nature Reviews Microbiology*, 2014, **12**, 809.
39. S. M. Raes, L. Jourdin, C. J. Buisman and D. P. Strik, *ChemElectroChem*, 2017, **4**, 386-395.
40. L. Jourdin, S. M. T. Raes, C. J. N. Buisman and D. P. Strik, *Frontiers in Energy Research*, 2018, **6**, 7.
41. S. Srikanth, M. Kumar, D. Singh, M. Singh, S. Puri and S. Ramakumar, *Bioresource technology*, 2018, **265**, 66-74.
42. Y. Jiang and R. J. Zeng, *Bioresource technology*, 2018.
43. J. M. Pisciotta, Z. Zaybak, D. F. Call, J.-Y. Nam and B. E. Logan, *Applied and environmental microbiology*, 2012, **78**, 5212-5219.

View Article Online

DOI: 10.1039/D0FD00132E



44. E. V. LaBelle, C. W. Marshall, J. A. Gilbert and H. D. May, *Plos One*, 2014, **9**.
45. L. T. Angenent, H. Richter, W. Buckel, C. M. Spirito, K. J. Steinbusch, C. M. Plugge, D. P. Strik, T. I. Grootsholten, C. J. Buisman and H. V. Hamelers, *Environmental science & technology*, 2016, **50**, 2796-2810. DOI: 10.1039/C6EM00132E
46. M. C. A. A. Van Eerten-Jansen, A. Ter Heijne, T. I. M. Grootsholten, K. J. J. Steinbusch, T. H. J. A. Sleutels, H. V. M. Hamelers and C. J. N. Buisman, *ACS Sustainable Chemistry & Engineering*, 2013, **1**, 513-518.
47. J. Philips, *Frontiers in Microbiology*, 2020, **10**.
48. D. González-Tenorio, K. M. Muñoz-Páez, G. Buitrón and I. Valdez-Vazquez, *Journal of CO2 Utilization*, 2020, **42**, 101314.
49. D. Vasudevan, H. Richter and L. T. Angenent, *Bioresource technology*, 2014, **151**, 378-382.
50. M. Yasin, Y. Jeong, S. Park, J. Jeong, E. Y. Lee, R. W. Lovitt, B. H. Kim, J. Lee and I. S. Chang, *Bioresource technology*, 2015, **177**, 361-374.
51. S. Bajracharya, S. Srikanth, G. Mohanakrishna, R. Zacharia, D. P. Strik and D. Pant, *Journal of Power Sources*, 2017, **356**, 256-273.
52. M. T. Agler, B. A. Wrenn, S. H. Zinder and L. T. Angenent, *Trends in biotechnology*, 2011, **29**, 70-78.
53. F. Kracke, A. B. Wong, K. Maegaard, J. S. Deutzmann, M. A. Hubert, C. Hahn, T. F. Jaramillo and A. M. Spormann, *Communications Chemistry*, 2019, **2**, 1-9.

