

RRI-C17 CABLED LOAD CELL




**RED ROOSTER
LIFTING**

STANDARD FEATURES

- ▷ On/Off
- ▷ Tare
- ▷ Zero
- ▷ Peak hold
- ▷ Low battery indicator
- ▷ Battery level indicator
- ▷ 3 x "AA" Alkaline battery
- ▷ Eight digit display
- ▷ Select units in lbs, kg, tonne or US Tons
- ▷ Rubber cover with lanyard
- ▷ Robust carry case
- ▷ 10m cable length from link to handset

OPTIONAL FEATURES

- ▷ RS232C output for printer or data logging with Pipeline® software to PC or print mode
- ▷ Rechargeable lithium batteries in handset for extended life
- ▷ Auto turn off after 5 minutes non use
- ▷ Backlit display

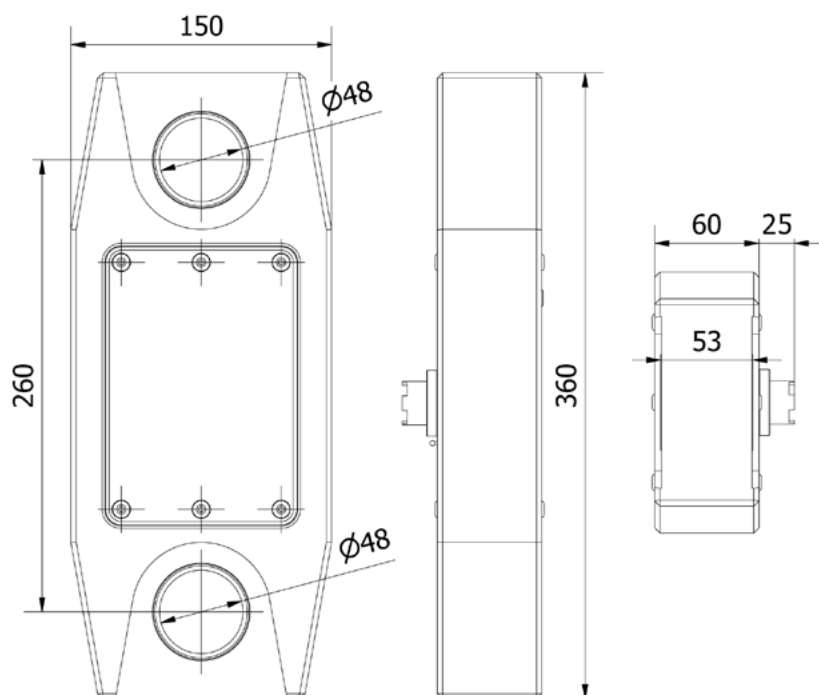

All measurements are in mm



Image for illustration purposes only

| Technical Specification | |
|-------------------------|--|
| Model | RRI-C17 |
| Capacity | 17 tonne |
| Resolution | 1 kg |
| Accuracy | < +/- 0.5% of FSD* |
| Temp Range | -10 °C to +40°C |
| Handset Dimensions | 200mm x 95mm x 30mm (270g) |
| Handset Battery | 3 x "AA" Alkaline |
| Battery Life | (Alkaline "AA") Continuous Use: Minimum 75 Hours** |
| Handset Display | 8 digit x 8mm |
| Shackle Size | 17 tonne |
| Link Weight | 6.0 kg |
| Link with Case | 10.0 kg |

*Based on a BS1610 Grade 1 Calibration Machine

**Depending on charge and conditions

Information subject to change without notice

CLEARANCE
NOW £575

Prices excluding VAT
While stock lasts