



STANDARD FEATURES


- ▷ Selfbraking wormgear or planetary gear transmissions
- ▷ I P 54 400 V AC / 3-phases / 50 Hz non braked motor. (440 / 3 / 60)
- ▷ Steel sheaves
- ▷ Double layer 2-component conservation according ISO 12944 category C2-Low, colour RAL 5010

AVAILABLE CONTROL OPTIONS


- ▷ Direct pendant remote control IP 65 with emergency stop (up to 1.5 kW 220 V AC / 1-phase or 2.2 kW 400 V AC / 3-phases)
- ▷ Control box IP 55 with push-buttons and emergency stop built acc. to NEN 1010
- ▷ Control box IP 66 with low voltage IP 65 remote control built acc. to NEN 1010
- ▷ Load limiter
- ▷ Frequency inverter for variable speed control
- ▷ Wireless radio remote control systems
- ▷ Limit switches

AVAILABLE OPTIONS

- ▷ Braked motor (aluminium or cast iron)
- ▷ IP 56 TENV cast iron motor for marine applications
- ▷ 220 single-phase motors (up to 1.5 kW)
- ▷ Explosion-proof motors
- ▷ Protective steel motor cover
- ▷ Manual or remotely controlled disengaging clutch
- ▷ Alternative speeds
- ▷ Protective guards
- ▷ Marine / offshore coating systems

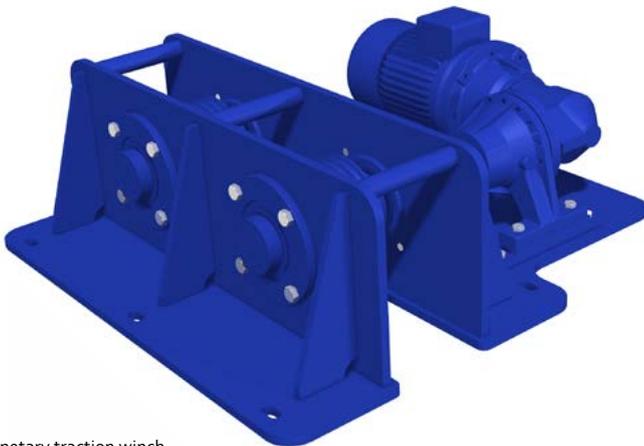

Planetary traction winch

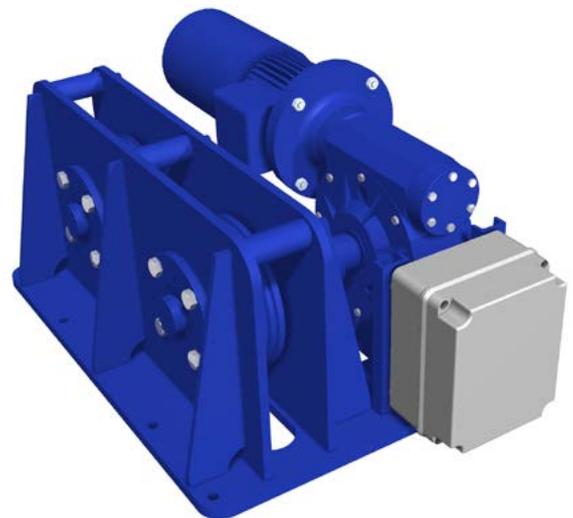

Wormgear traction winch

Image for illustration purposes only