



STANDARD FEATURES



- ▷ Self-braking wormgear, helical bevel, planetary or slew gear transmissions
- ▷ IP 56 TENV 400 V AC / 3 phases / 50 Hz braked motors (or 440/3/60)
- ▷ Radial piston air or hydraulic motors
- ▷ Heavy duty construction
- ▷ Double layer 2-component conservation according
- ▷ ISO 12944 category C2-Low, colour RAL 5010

AVAILABLE OPTIONS

- ▷ Explosion-proof electric motors
- ▷ Protective steel motor covers
- ▷ Alternative speeds
- ▷ Protective guards
- ▷ Stainless steel slip rings (fibre optic or elec.)
- ▷ Stainless steel swivels
- ▷ Spooling devices

AVAILABLE CONTROL OPTIONS

- ▷ Control box IP 55 with push-buttons and emergency stop built acc. to NEN 1010
- ▷ Control box IP 66 with low-voltage IP 65 remote control built acc. to NEN 1010
- ▷ Load limiters
- ▷ Frequency inverters for variable speed control
- ▷ Wireless radio remote control systems
- ▷ Limit switches
- ▷ Pneumatic and hydraulic control systems

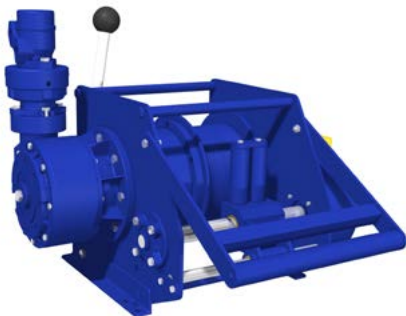

Images for illustration purposes only