

EDC24SD - DUAL SPEED ELECTRIC CHAIN HOIST



RED ROOSTER LIFTING


STANDARD FEATURES

- ▷ 230V contactor control
- ▷ Protection class IP44
- ▷ Upper limit switch
- ▷ Variable lifting speed
- ▷ High-performance mechanical load brake
- ▷ Plastic chain bucket

AVAILABLE OPTIONS

- ▷ Geared trolley
- ▷ Plain trolley
- ▷ Plain mini trolley

KITO

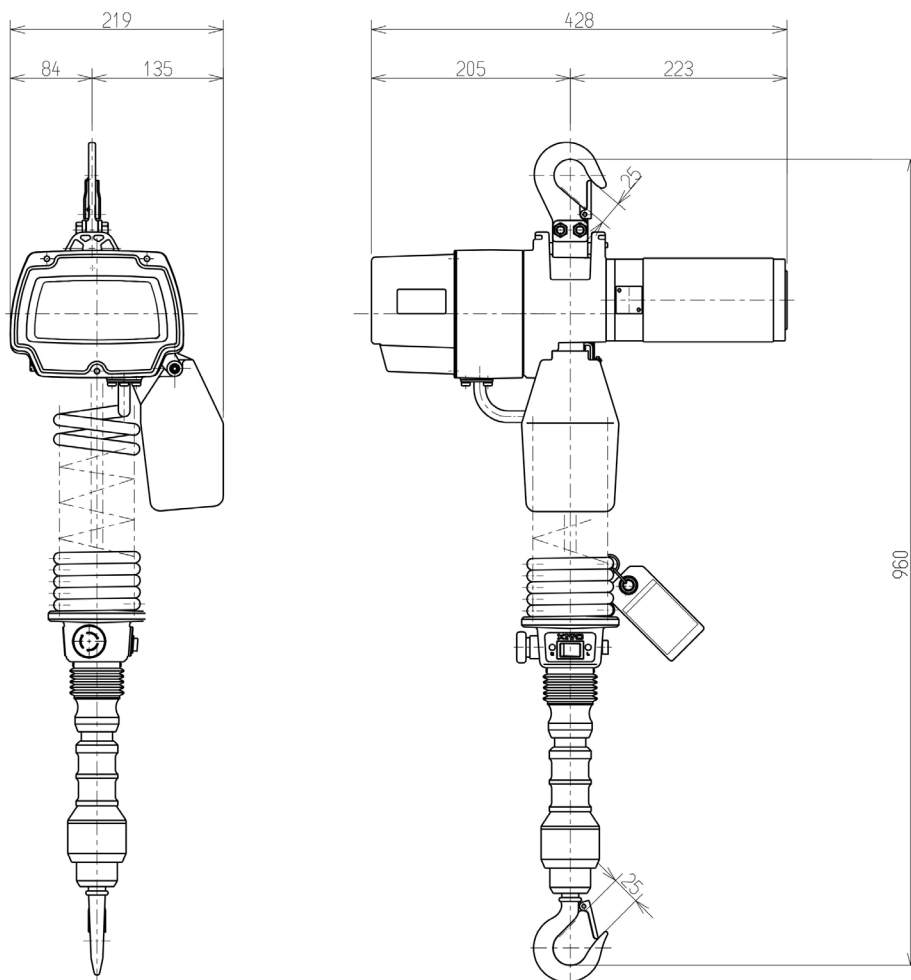

All measurements are in mm

MODEL	WLL (KG)	LIFTING MOTOR		LIFTING SPEED M/MIN		LOAD CHAIN		
		OUTPUT (kW)	RATING (%)	50Hz		DIA (MM)	x	CHAIN FALLS
				HIGH	LOW			
EDC24SD	240	0.6	30	12.9	3.0	4.0	x	1
	CLASSIFICATION ISO / FEM			NET WEIGHT (KG)		HEIGHT OF LIFT (M)		
	1Am			14.5		1.8		

Information subject to change without notice

Image for illustration purposes only

RED ROOSTER LIFTING
Nauta House, The Meadows
Oldmeldrum, Aberdeenshire
United Kingdom, AB51 0EZ

T: +44 (0) 1651 872101
E: sales@redroosterlifting.com
W: www.redroosterlifting.com

C06-KEDC5 REV0