

TMH-10T-AT10S


AIR HOIST & TROLLEY

The **TMH-10T-AT10S** is a 10 tonne chain hoist and trolley from Red Rooster Lifting. This is part of our air hoist and trolley range for lifting equipment applications in industry.



RED ROOSTER
LIFTING

RAISING EXPECTATIONS

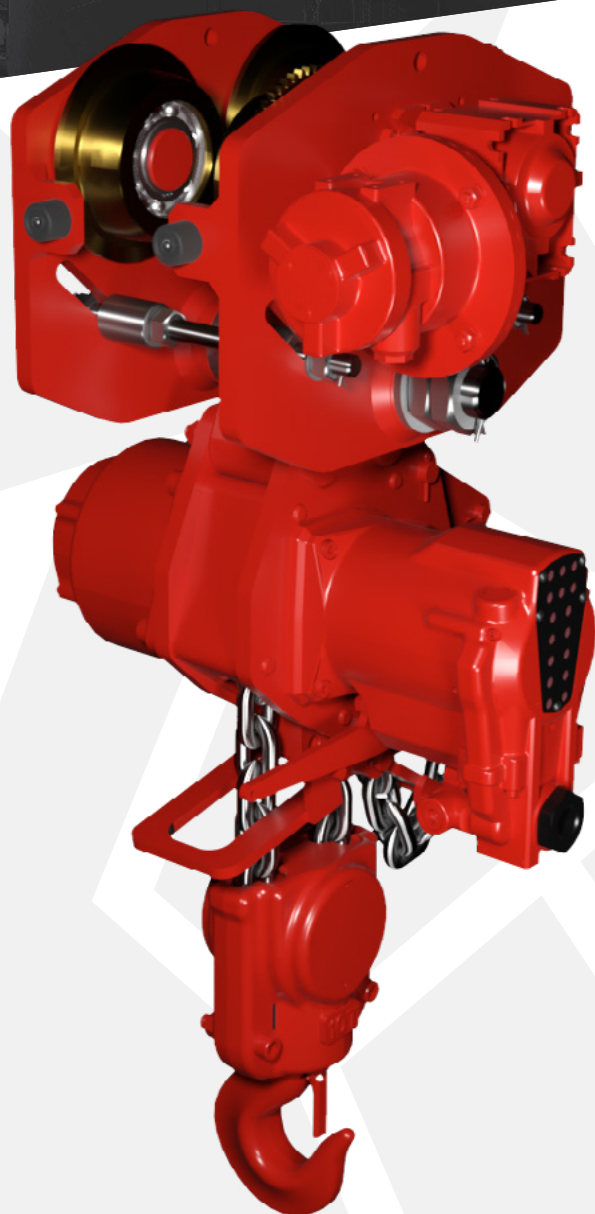

The new **Red Rooster Lifting** TMH series air hoists and trolleys have the highest lifting speed with the lowest headroom on the hoist market. With the high M4 classification of mechanism (ISO 4301-1) this high speed air hoist is extremely durable and will guarantee the continuity of your process. The TMH hoists are designed to operate at full lifting capacity with an air pressure from 4 – 6 bar. For full speed operation the hoist air pressure should be 6 bar.

STANDARD FEATURES

- Toku rotary vane motor
- Robust 3 step planetary gearbox
- Failsafe automatic internal disc brake
- Choice of pendant controls or control stations
- Mechanical upper & lower switches
- Cast steel housing
- Internal silencing down to 80 dB(A)
- Alloy safety swivel hooks with safety catch
- Load chain 16 x 45mm of European manufacture to EN818-7
- Automatic load limiter
- Trolley to suit various flange profiles
- Anti-tilt & anti-drop plates
- High efficiency motor gearbox
- Heavy duty sealed wheel bearings
- Wheel profile to suit parallel or tapered flanges

AVAILABLE OPTIONS

- Marine specification
- Special paint systems
- Collision bumpers
- Corrosion protection
- UK Ex scheme or ATEX zone 1 specification
- Chain collectors (galvanised or stainless steel)
- Articulated trolley
- Low headroom units
- Rack & pinion drive
- Travel limits
- Air service units
- Festoon systems
- Radio control remote
- Optional travel speeds
- Beam brake




UK EX SCHEME ZONE 2
ATEX ZONE 2
AS STANDARD

T: +44 (0) 1651 872101
sales@redroosterlifting.com

REDROOSTERLIFTING.COM

Red Rooster Lifting Limited Nauta House, The Meadows, Oldmeldrum, Inverurie, Aberdeenshire, UK, AB51 0EZ

All measurements are in mm
Information subject to change without notice

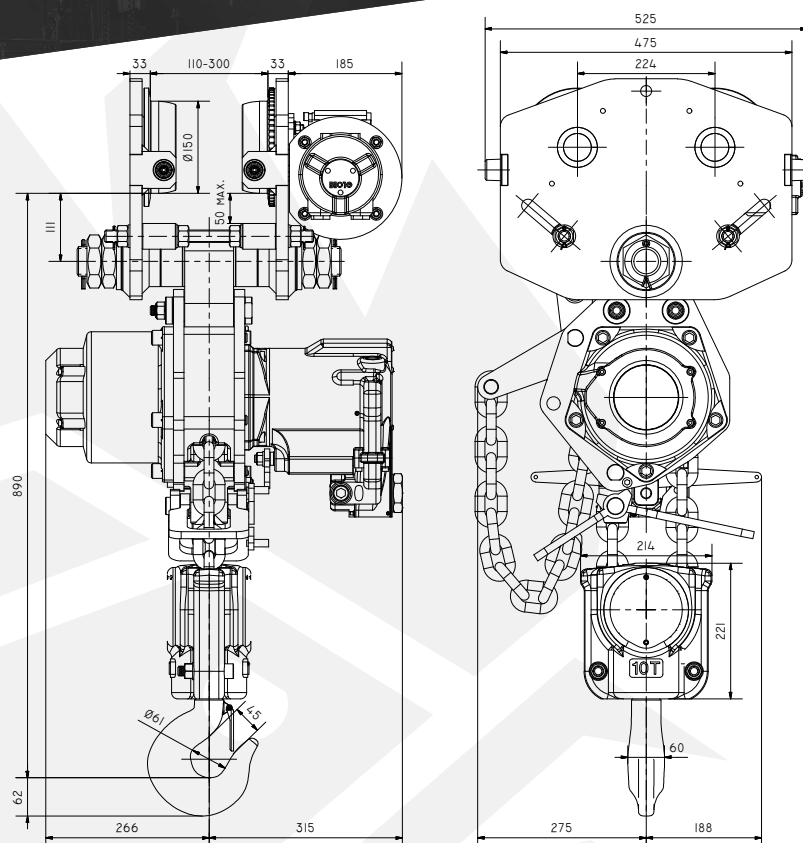

HOIST MODEL	TMH-10T-AT10S	TROLLEY MODEL	AT10S
WLL	10000 kg	G.A. DRAWING	1503-31
CHAIN FALLS	2	FLANGE RANGE 1 RANGE 2 RANGE 3	110-180
LIFTING SPEED FULL LOAD	1.6 m/min		180-240
LIFTING SPEED WITHOUT LOAD	3.3 m/min		240-300
LOWERING SPEED WITH LOAD	3.2 m/min	STANDARD TROLLEY TEMP RANGE	-10 to +50°C
MAX AIR CONSUMPTION	71 l/sec	OPTIONAL TROLLEY TEMP RANGE	-20 to +60°C
WORKING PRESSURE	4-6 bar	TRAVEL SPEED (M/MIN)	8
AIR CONNECTION	1" BSP	WHEEL MATERIAL	Steel
MINIMUM HOSE DIA.	1"	ATEX ZONE 1 WHEEL MATERIAL	Bronze
WEIGHT 3M HOL & TROLLEY	310 kg	MINIMUM BEND RADIUS (M)	2.5
ADDITIONAL METRE HOL	11.4 kg	NUMBER OF WHEELS	4
ATS = STANDARD AT-ATX = ATEX		DRIVEN WHEELS	2
		MAX AIR CONSUMPTION	40 l/sec

ATS = STANDARD AT-ATX = ATEX

T: +44 (0) 1651 872101
sales@redroosterlifting.com