


HD3C TROLLEY FOR TRANSPORT OF PERSONS

320 KG - 4,000 KG LIFTING CAPACITY - EN1808



**RED ROOSTER
LIFTING**

RAISING EXPECTATIONS

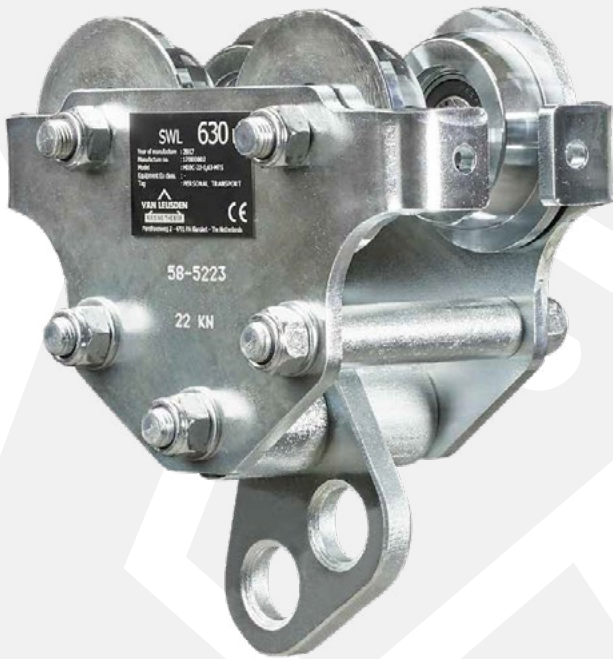

DESIGNED AND MANUFACTURED ACCORDING TO

- EC machinery directive 2006/42/EC
- EN13157
- EN1808
- Manufactured in the Netherlands

STANDARD FEATURES

- Unique 3 bolt design which ensures stability and safe situation
- Capacity including persons and materials
- Trolleys for transport of persons are always designed for fixed beam width
- Straight suspension bolt with spacer
- Wheel break support and anti-tilt device integrated
- Trolley wheels with life time lubricated bearings
- Suitable for all types of beams
- Surface treatment trolley electric galvanized up to 64kN chassis type
- 2 layer paint system, RAL7021, chassis type 84kN and higher
- Hand chain electric galvanized

AVAILABLE OPTIONS

- Special surface protection according to ISO 12944
- Extended chain wheel drive (max. 300mm), dimension "M"
- Special side plates to increase dimension "E"
- Stainless steel nameplate with tag number
- Rubber buffers mounted on trolley
- Triangular suspension safety plate with lugs for safety line
- 3.1 load test certificate
- 3.1 material certificate for load bearing trolley parts
- Stainless steel hand chain
- General arrangement drawing in 2D dwg. And 3D step file

REMARK

The minimum beam radius is based on the maximum beam width which is specified in the table. For smaller curved beams always contact us or your local agent for clarification.

Maximum INP profile restriction for 6kN = INP220, 11kN = INP300, 22kN = INP360, 33kN = INP400, 52/64kN = INP450

KITO VAN LEUSDEN

HD3C TROLLEY FOR TRANSPORT OF PERSONS




**RED ROOSTER
LIFTING**

RAISING EXPECTATIONS

320 KG - 4,000 KG LIFTING CAPACITY - EN1808

DIMENSIONS

All measurements are in mm
Information subject to change without notice

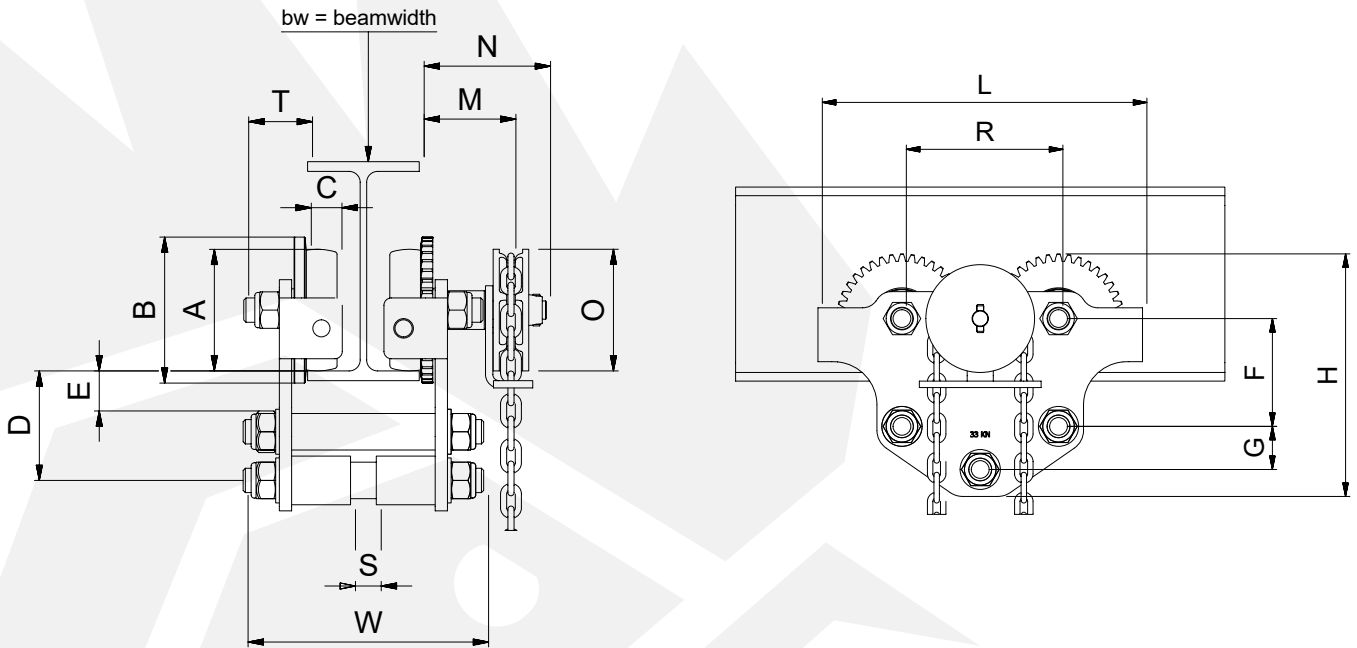

CAPACITY	PUSH MODEL	GEARED MODEL	CHASSIS	FIXED FLANGE RANGE	WEIGHT * - **	DIMENSIONS														
						A	B	C	D	E	F	G	H	L	M	N	O	T	R	W
KG			kN	MM	KG	A	B	C	D	E	F	G	H	L	M	N	O	T	R	W
320	81700-01110	81750-01120	11	55-251	5-6	60	75	18	60	20	60	30	160	190	72	97	100	35	99	BW+70
630	81700-02210	81750-02220	22	74-305	11-12	80	100	22	75	27	80	35	205	255	69	98	100	43	123	BW+85
1,000	81700-03310	81750-03320	33	90-305	18-19	100	120	25	90	35	100	40	245	300	75	104	100	52	144	BW+105
1,600	81700-05210	81750-05220	52	106-305	31-32	125	150	30	117	40	120	60	305	375	94	119	135	58	174	BW+120
2,000	81700-06410	81750-06420	64	106-305	33-34	125	150	30	117	40	120	60	310	375	94	119	135	63	174	BW+120
2,500	81700-08410	81750-08420	84	119-305	85-90	160	190	35	145	45	145	80	365	450	110	135	270	82	220	BW+150
3,200	81700-10410	81750-10420	104	131-305	90-95	160	190	35	145	45	145	80	370	450	110	135	270	82	220	BW+150
4,000	81700-12410	81750-12420	124	143-305	95-100	160	190	35	145	45	145	80	370	450	110	135	270	82	220	BW+150

* Weight push trolley ** Weight geared trolley / Each control meter hand chain = 1 KG

KITO VAN LEUSDEN

RED ROOSTER LIFTING LIMITED

Nauta House, The Meadows, Oldmeldrum, Inverurie, Aberdeenshire, UK, AB51 0EZ

T: +44 (0) 1651 872101 sales@redroosterlifting.com REDROOSTERLIFTING.COM