

## WALL SOCKET DOUBLE ENTRY 63A IP44 - UI463-6S-RU



63A 5Pole - 3Pole + N + E

Operating Voltage - 230 - 400V

Frequency - 50/60Hz

Clock Position, colour code - 6 ■


For wall and machine mounting with cable connection possible from top and back.

Connectable Cable Size 6 - 16 mm<sup>2</sup> . Solid cable 6 - 25 mm<sup>2</sup>

Supplied with cable gland entry.

Degree of protection IP44.

## PRODUCT MEASUREMENTS

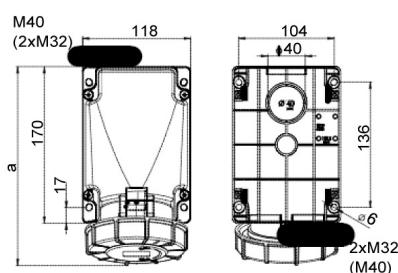


b=height  
angle=15°

In	Poles	a	Depth	Weight
63A	5	213	173	0,923Kg

Our IEC/CEE connectors are now tested and certified under the international standard IEC 60 309, which has been developed in the IEC standardisation organisation (International Electrotechnical Commission). This worldwide standard is systematically applied to all GARO products. The use of this standard eliminates the possibility of incorrect connections, regardless of the circumstances.

The standardised products are colour-coded according to a clock face, where the clock positions (1 to 12) correspond to the earth socket position in the socket, viewed from the front, with the locating groove always at the 6 o'clock position. Each position corresponds to a voltage and frequency value of each 2, 3 and 4 pole socket with rated currents of 16A, 32A, 63A and 125A and voltages of >50V to 690V.

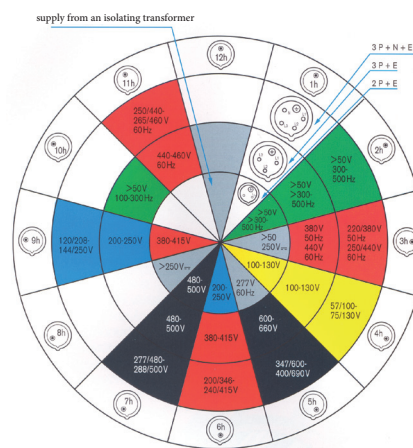

GARO plugs and sockets are tested and certified and comply with the following international and national standards, among others:

IEC 60 309-2, IEC 60 309-1, SS EN 60309-1, SS EN 60309-2, CEE17, SEMKO 117, VDE 0623, BS 4343, EN 50 250