

SAMUEL HEATH

Product Data Sheet

N5139 Grab Rail



N5139

Important- please read these instructions before strating work.

1. Check that there are no buried pipes or cables before drilling any holes. Take extreme care when using electrical equipment near water.
2. We recommend the use of a specialist drill bit when fixing accessories to a tilted area.

Supplied Fittings:

Grab Rail x1 Wall Rose x2 Allen Key x1 (please note that screws and wall plugs are not supplied with this product. Use fixings that are suitable for the intended installation point, if in doubt please consult a qualified tradesperson.)

Fitting Instructions:


The following instrcutions are for solid walls only (please consult a qualified tradesperson if fitting to any other type of wall.)

1. Position grab rail against wall and mark wall with pencil around wall roses.
2. Using allen key remove grub screw's from both wall roses and remove wall roses.
3. Using wall roses as a guide, mark the screw holes.
4. Drill holes and insert the wall plugs so that they are flush with the wall.
5. Screw both wall roses to wall.
6. Position grab rail into wall roses and reassemble all grub screws.

Safety Note:

Prior to drilling into walls: Check there are no hidden elctrical wires,cables or water supply pipes with the aid of an electronic detector.

Note: Wall plugs supplied are only suitable for solid stone/ brick walls. For plasterboard walls use specialist wall plugs. Seek advice from a specialist about the suitability of fixings to be used.

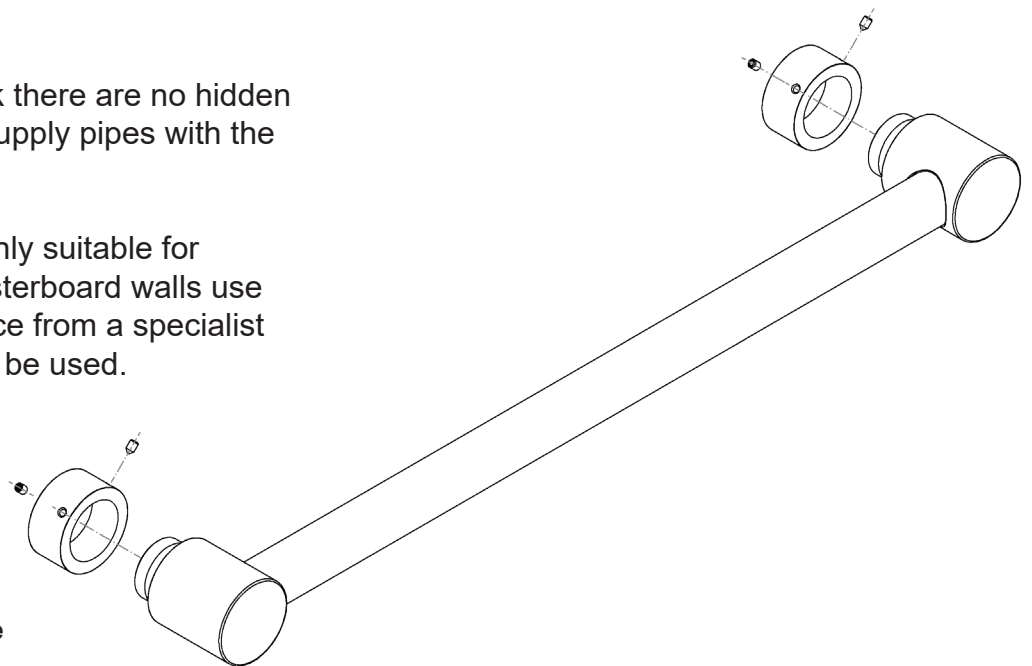

SAMUEL HEATH
Head Office and Customer Service
Leopold Street
Birmingham
England
B12 0UJ

T: +44 (0)121 766 4200
F: +44 (0)121 772 3334

Info@samuel-heath.com
www.samuel-heath.co.uk

US Customer Service
usa@samuel-heath.com
Federal I.D. No. 58-1504682
www.samuel-heath.com

9-1911
Issue: A