




DESIGNLIGHT

SCANDINAVIAN AB

Artikel nr.: B-1MW30D MW E-nr 74 68 092

Material: Steel


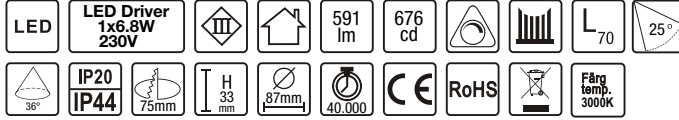


- Dimbar med 350 mA driver
- 87 lm/w med lins, driver
- 108 lm/w utan lins, driver
- CRI Värdet > 85

- Dimmable with 350 mA driver
- 87 lm/w with lens, driver
- 108lm/w without lens, driver
- CRI Value > 85



Ljusfördelningskurva | Light distribution curve (Unit: Cd)

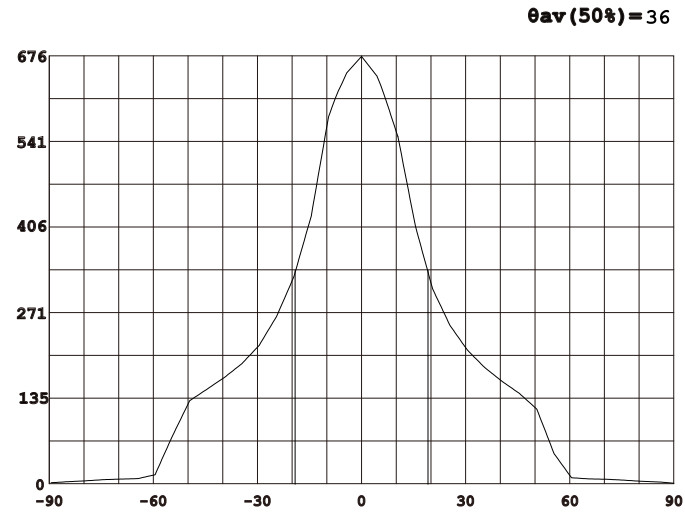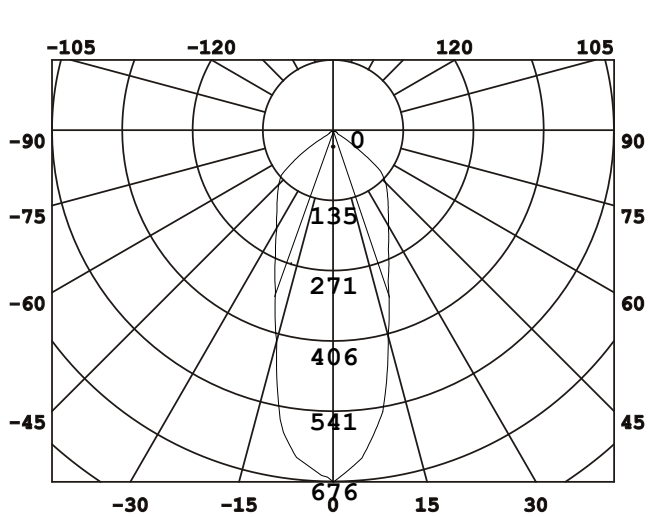

$\theta_{av} (50\%) = 36$

Belysningsstyrka | Illuminance (Unit: Lux)

| | | |
|-------|---------------------|----------|
| 0.50m | 1850.44lx 2705.02lx | 32.07cm |
| 1.00m | 462.61lx 676.25lx | 64.15cm |
| 1.50m | 205.60lx 300.56lx | 96.22cm |
| 2.00m | 115.65lx 169.06lx | 128.30cm |
| 3.00m | 51.40lx 75.14lx | 192.44cm |

Avstånd Belysningsstyrka Spridnings vinkel 36° Diam.

Mått | Dimension

