


1. Cold water connection 5-12°C, 250-500 kPa, R 1/2" internal thread
  2. Hot water connection 55-70°C, 250-500 kPa, R 1/2" internal thread
  3. Electrical connection: Electrical heated 400V 3N 11,3kW 20A  
Steam heated 400V 3N 2,4kW 16A
  4. Steam connection 50-250kPa R 1/2" internal thread, 15-20kg/h
  5. Condensate water connection 90-95°, R1/2" internal thread
  6. Drain connection 50 mm, 3l/min
  7. Connection for detergent hose
- Ventilation requirements 600m<sup>3</sup>/h

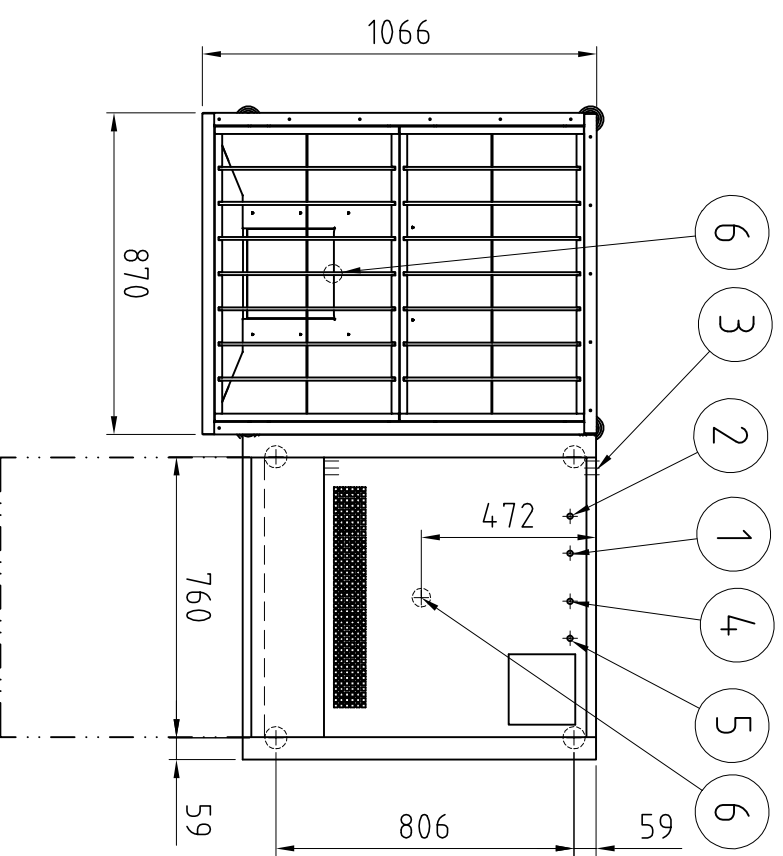

Nr	Ant.	Ändring och/eller medd.-nr	Datum	Inf.	Godk.
					V

Det.-nr	Ant.	Benämning		Material	Ytbehandling	Dimension/Art.-nr	
Konstr. DB	Ritad	Generell Referens SS-ISO 2768 M	Kontr.	Godk. DB	Skala 1:20	Ersätter	Ersatt av
			Reg.-nr 17.0			Filnamn 39491	Dat. 040422
						Rit.-nr 39491	Rev.
		Wexödisk AB 0470-771200		GRANULDISK WD-90 GR INST.			
		WD-90GR					