



DRILLING INSTRUCTION DETERGENT INLET

THIS DRAWING CONTAINS CONFIDENTIAL INFORMATION AND REMAINS THE PROPERTY OF WEXIÖDISK AB AND MAY NOT, WITHOUT WHOSE PERMISSION, BE COPIED, SHOWN OR HANDED TO A THIRD PARTY, OR BE USED AS A BASIS FOR ALTERNATE DESIGNS.

FOR USING Ø8 CONNECTION
DETERGENT: DRILL Ø4MM HOLE

FOR USING Ø18 CONNECTION
DETERGENT: DRILL Ø10-12,5 MM HOLE

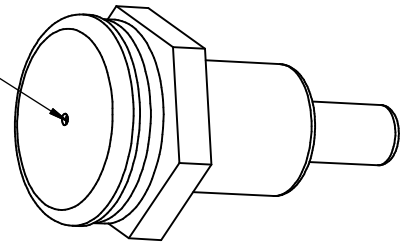

Konstr. RF	Ritad RF	Generell tolerans SS-ISO 2768 m	Kontr.	Reg.-nr 5,1	Godk.	Skala	Ersätter	Ersatt av
 INSTRUKTION BORRA DISKMEDELSANSLUTNING WD-6/7/8/12/11/423							Filnamn 400297.dwg	Dat. 16-12-02
							Ritn.-nr 400297	Rev.