

ÜRÜN KODU/PRODUCT CODE	: 260X28
ÜRÜN ADI/PRODUCT NAME	: SIVA ALTI SLIM LED DOWNLIGHT 6W/FLUSH MOUNTED SLIM LED DOWNLIGHT 6W
ÜRÜN BİLGİSİ/PRODUCT INFORMATION	
GÖVDE/BODY	: ALÜMİNYUM/ALUMINIUM
DİFÜZÖR/DIFFUSOR	: OPAL POLİSTREN DİFÜZÖR/OPAL POLYSTRENE DIFFUSER
OPTİK/OPTICAL	: PMMA LGP
IP KORUMA SINIFI/ IP PROTECTION	: IP20- CLASS II
KULLANIM ŞEKLİ/FIELDS OF APPLICATION	: ALÇIPAN,SIVA ALTI/SHEETROCK,FLUSH MOUNTED
LED	: SMD LED

26YX28

→ Işık Rengi/Light Color
→ Gövde Rengi/Body Color

Y= 0 Beyaz/White	1 Inox	2 Gri/Gray	3 Siyah/Black	4 Krom/Chrome
5 Altın/Gold	6 Füme/Smoke	7 Bakır/Copper	8 Eskitme/Wear	
X=3 3000K	4 4000K	6 6500K		

ELEKTRİKSEL ÖZELLİKLER/ELECTRICAL SPECS

TÜKETİM GÜCÜ/ POWER	: 6W
GİRİŞ GERİLİMİ/ INPUT VOLTAGE	: AC 220V
GİRİŞ AKIMI/ INPUT CURRENT	: 0.065 A
FREKANS/FREQUENCY	: 50 Hz
GÜÇ FAKTÖRÜ/POWER FACTOR	: 0.44
ÇIKIŞ GERİLİMİ/ OUTPUT VOLTAGE	: DC 12-28V
ÇIKIŞ AKIMI/ OUTPUT CURRENT	: 0.300 A
THD(TOTAL HARMONIC DISTORTION)	: >%20

FOTOMETRİK ÖZELLİKLER/PHOTOMETRIC SPECS

RENK SICAKLIĞI/ KELVIN TEMPERATURE(CCT)	: 3000K	4000K	6500K
IŞIK AÇISI/ LIGHT BEAM ANGLE	: 110°		
IŞIK AKISI/ LUMEN	: 370	400	420
RENKSEL GERİ VERİM/ COLOR RENDERING INDEX (CRI)	: Ra>80		
VERİM/ EFFICIENCY	: 55lm/W		

DİĞER ÖZELLİKLER/OTHER SPECS

ÇALIŞMA SICAKLIĞI/OPERATING TEMPERATURE(CCT)	: -10°C,50°C
LED ÖMRÜ/LED LIFE TIME(PERFORMANCE L70)	: ≥50.000 Saat/Hours

OPSİYONEL ÖZELLİKLER/OPTIONAL SPECS

1 SAAT ACİL AYDINLATMA KİTİ/ 1 HOUR EMERG UNIT	: ✓
3 SAAT ACİL AYDINLATMA KİTİ/ 3 HOUR EMERG UNIT	: ✓
DIM/ DIMMING	: ✓
DALI	: ✓


FOTOMETRİK EĞRİ/LIGHT DISTRIBUTION CURVE

Işık Dağılım Eğrisi/Light Distribution Curve

AAI FIGURE

Armatür farklı mesafelerde
olduğunda aydınlatılmış alanı
ve ortalama aydınlatmayı
belirtir.

The curves indicate the illuminated
area and the average illumination when the
luminaire is at a different distance

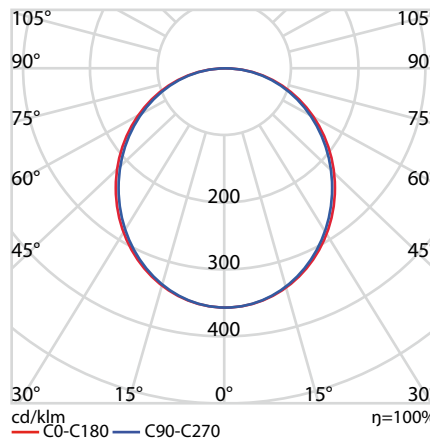

Flux out :246.7lm

Height	Eavg, Emax	Angle : 114.31 deg	Diameter
1m	38.51,124.4lx		281.79cm
2m	9.626,31.11lx		563.58cm
3m	4.278,13.83lx		845.37cm
4m	2.407,7.777lx		1127.16cm
5m	1.540,4.978lx		1408.95cm
6m	1.070,3.457lx		1690.75cm
7m	0.7858,2.540lx		1972.54cm
8m	0.6016,1.944lx		2254.33cm
9m	0.4754,1.536lx		2536.12cm
10m	0.3851,1.244lx		2817.91cm