

ÜRÜN KODU/PRODUCT CODE	: 260X04
ÜRÜN ADI/PRODUCT NAME	: SIVA ALTI CAMLI LED DOWNLIGHT 6W/FLUSH MOUNTED GLASS LED DOWNLIGHT 6W
ÜRÜN BİLGİSİ/PRODUCT INFORMATION	
GÖVDE/BODY	: ALUMİNYUM ENJEKSİYON/DIE CAST ALUMINIUM
CAM/GLASS	: CAM/GLASS
DİFÜZÖR/DIFFUSOR	: OPAL POLİSTREN DİFÜZÖR/OPAL POLYSTRENE DIFFUSER
IP KORUMA SINIFI/ IP PROTECTION	: IP20 Class II
KULLANIM ŞEKLİ/FIELDS OF APPLICATION	: SIVA ALTI/FLUSH MOUNTED
LED	: SMD LED

26YX04

→ Işık Rengi/Light Color
→ Gövde Rengi/Body Color

Y= 0 Beyaz/White 1 Inox

X=3 3000K 4 4000K 6 6500K

ELEKTRİKSEL ÖZELLİKLER/ELECTRICAL SPECS

TÜKETİM GÜCÜ/ POWER	: 6W
GİRİŞ GERİLİMİ/ INPUT VOLTAGE	: AC 220V
GİRİŞ AKIMI/ INPUT CURRENT	: 0.06 A
FREKANS/FREQUENCY	: 50 Hz
GÜÇ FAKTÖRÜ/POWER FACTOR	: 0.45
ÇIKIŞ GERİLİMİ/OUTPUT VOLTAGE	: 12-24VDC
ÇIKIŞ AKIM/OUTPUT CURRENT	: 0.3 A
THD(TOTAL HARMONIC DISTORTION)	: >%20

FOTOMETRİK ÖZELLİKLER/PHOTOMETRIC SPECS

RENK SICAKLIĞI/ KELVIN TEMPERATURE(CCT)	: 3000K 4000K 6500K
IŞIK AÇISI/ LIGHT BEAM ANGLE	: 110°
IŞIK AKISI/ LUMEN	: 300 300 300
RENKSEL GERİ VERİM/ COLOR RENDERING INDEX (CRI)	: Ra>80
VERİM/ EFFICIENCY	: 50Lm/W

DİĞER ÖZELLİKLER/OTHER SPECS

ÇALIŞMA SICAKLIĞI/OPERATING TEMPERATURE(CCT)	: -10°C,50°C
LED ÖMRÜ/LED LIFE TIME (PERFORMANCE L70)	: ≥50.000 Saat/Hours

OPSİYONEL ÖZELLİKLER/OPTIONAL SPECS

1 SAAT ACİL AYDINLATMA KİTİ/ 1 HOUR EMERG UNIT	: ✓
3 SAAT ACİL AYDINLATMA KİTİ/ 3 HOUR EMERG UNIT	: ✓
DIM/ DIMMING	: ✓
DALI	: ✓


FOTOMETRİK EĞRİ/LIGHT DISTRIBUTION CURVE

Işık Dağılım Eğrisi/Light Distribution Curve

AAI FIGURE

Armatür farklı mesafelerde
olduğunda aydınlatılmış alanı
ve ortalama aydınlatmayı
belirtilir.

The curves indicate the illuminated
area and the average illumination when the
luminaire is at a different distance

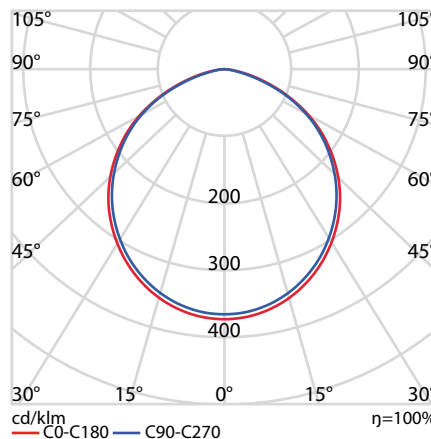

Flux out :189.8lm

Height	Eavg, Emax	Angle :107.39deg	Diameter
1m	31.89,99.22lx		272.22cm
2m	7.972,24.81lx		544.44cm
3m	3.543,11.02lx		816.65cm
4m	1.993,6.201lx		1088.87cm
5m	1.276,3.969lx		1361.09cm
6m	0.8858,2.756lx		1633.31cm
7m	0.6508,2.025lx		1905.53cm
8m	0.4983,1.550lx		2177.74cm
9m	0.3937,1.225lx		2449.96cm
10m	0.3189,0.992lx		2722.18cm