

ÜRÜN KODU/PRODUCT CODE	: 260X23
ÜRÜN ADI/PRODUCT NAME	: SIVA ALTI SLIM LED DOWNLIGHT 12W/FLUSH MOUNTED SLIM LED DOWNLIGHT 12W
ÜRÜN BİLGİSİ/ PRODUCT INFORMATION	
GÖVDE/BODY	: ALÜMİNYUM/ALUMINIUM
DİFÜZÖR/DIFFUSOR	: OPAL POLİSTREN DİFÜZÖR/OPAL POLYSTRENE DIFFUSER
OPTİK/OPTICAL	: PMMA LGP
IP KORUMA SINIFI/ IP PROTECTION	: IP20- CLASS II
KULLANIM ŞEKLİ/FIELDS OF APPLICATION	: ALÇIPAN,SIVA ALTI/SHEETROCK,FLUSH MOUNTED
LED	: SMD LED

26YX23

→ Işık Rengi/Light Color  
→ Gövde Rengi/Body Color

Y= 0 Beyaz/White	1 Inox	2 Gri/Gray	3 Siyah/Black	4 Krom/Chrome
5 Altın/Gold	6 Füme/Smoke	7 Bakır/Copper	8 Eskitme/Wear	
X=3 3000K	4 4000K	6 6500K		

## ELEKTRİKSEL ÖZELLİKLER/ELECTRICAL SPECS

TÜKETİM GÜCÜ/POWER	: 12W
GİRİŞ GERİLİMİ/ INPUT VOLTAGE	: AC 220V
GİRİŞ AKIMI/ INPUT CURRENT	: 0.116 A
FREKANS/FREQUENCY	: 50 Hz
GÜÇ FAKTÖRÜ/POWER FACTOR	: 0.43
ÇIKIŞ GERİLİMİ/ OUTPUT VOLTAGE	: DC 24-42V
ÇIKIŞ AKIMI/ OUTPUT CURRENT	: 0.300 A
THD(TOTAL HARMONIC DISTORTION)	: >%20

## FOTOMETRİK ÖZELLİKLER/PHOTOMETRIC SPECS

RENK SICAKLIĞI/KELVIN TEMPERATURE(CCT)	: 3000K	4000K	6500K
IŞIK AÇISI/LIGHT BEAM ANGLE	: 110°		
IŞIK AKISI/LUMEN	: 600	800	850
RENKSEL GERİ VERİM/ COLOR RENDERINGINDEX (CRI)	: Ra>80		
VERİM/ EFFICIENCY	: 68Lm/W		

## DİĞER ÖZELLİKLER/OTHER SPECS

ÇALIŞMA SICAKLIĞI/OPERATING TEMPERATURE(CCT)	: -10°C,50°C
LED ÖMRÜ/LED LIFE TIME(PERFORMANCE L70)	: >50.000 Saat/Hours

## OPSİYONEL ÖZELLİKLER/OPTIONAL SPECS

1 SAAT ACİL AYDINLATMA KİTİ/1 HOUR EMERG UNIT	: ✓
3 SAAT ACİL AYDINLATMA KİTİ/3 HOUR EMERG UNIT	: ✓
DIM/DIMMING	: ✓
DALI	: ✓


## FOTOMETRİK EĞRİ/LIGHT DISTRIBUTION CURVE

Işık Dağılım Eğrisi/Light Distribution Curve

## AAI FIGURE

Armatür farklı mesafelerde olduğunda aydınlatılmış alanı ve ortalama aydınlatmayı belirtir.

The curves indicate the illuminated area and the average illumination when the luminaire is at a different distance

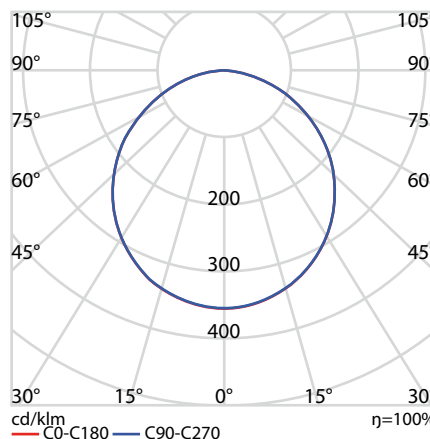

Flux out :305.4lm

Height	Eavg, Emax	Angle : 110.55deg	Diameter
1m	45.92,150.5lx		288.57cm
2m	11.48,37.63lx		577.13cm
3m	5.102,16.73lx		865.70cm
4m	2.870,9.409lx		1154.26cm
5m	1.837,6.021lx		1442.83cm
6m	1.275,4.182lx		1731.39cm
7m	0.9371,3.072lx		2019.96cm
8m	0.7175,2.352lx		2308.52cm
9m	0.5669,1.858lx		2597.09cm
10m	0.4592,1.505lx		2885.68cm