

ÜRÜN KODU/PRODUCT CODE	: 260X33
ÜRÜN ADI/PRODUCT NAME	: SIVA ALTI SLIM LED DOWNLIGHT 20W/FLUSH MOUNTING SLIM LED DOWNLIGHT 20W
ÜRÜN BİLGİSİ/ PRODUCT INFORMATION	
GÖVDE/BODY	: ALÜMİNYUM/ALUMINIUM
DİFÜZÖR/DIFFUSOR	: OPAL POLİSTREN DİFÜZÖR/OPAL POLYSTRENE DIFFUSER
OPTİK/OPTICAL	: PMMA LGP
IP KORUMA SINIFI/ IP PROTECTION	: IP20- CLASS II
KULLANIM ŞEKLİ/FIELDS OF APPLICATION	: ALÇIPAN,SIVA ALTI/SHEETROCK,FLUSH MOUNTED
LED	: SMD LED

26YX33

→ Işık Rengi/Light Color  
→ Gövde Rengi/Body Color

Y= 0 Beyaz/White	1 Inox	2 Gri/Gray	3 Siyah/Black	4 Krom/Chrome
5 Altın/Gold	6 Füme/Smoke	7 Bakır/Copper	8 Eski/Used	
X=3 3000K	4 4000K	6 6500K		

## ELEKTRİKSEL ÖZELLİKLER/ELECTRICAL SPECS

TÜKETİM GÜCÜ/POWER	: 20W
GİRİŞ GERİLİMİ/ INPUT VOLTAGE	: AC 220V
GİRİŞ AKIMI/ INPUT CURRENT	: 0.177 A
FREKANS/FREQUENCY	: 50 Hz
GÜÇ FAKTÖRÜ/POWER FACTOR	: 0.47
ÇIKIŞ GERİLİMİ/ OUTPUT VOLTAGE	: DC 55-85V
ÇIKIŞ AKIMI/ OUTPUT CURRENT	: 0.300 A
THD(TOTAL HARMONIC DISTORTION)	: >%20

## FOTOMETRİK ÖZELLİKLER/PHOTOMETRIC SPECS

RENK SICAKLIĞI/KELVIN TEMPERATURE(CCT)	: 3000K	4000K	6500K
IŞIK AÇISI/LIGHT BEAM ANGLE	: 110°		
IŞIK AKISI/ LUMEN	: 1370	1400	1520
RENKSEL GERİ VERİM/ COLOR RENDERING INDEX (CRI)	: Ra>80		
VERİM/ EFFICIENCY	: 70Lm/W		

## DİĞER ÖZELLİKLER/OTHER SPECS

ÇALIŞMA SICAKLIĞI/OPERATING TEMPERATURE(CCT)	: -10°C,50°C
LED ÖMRÜ/LED LIFE TIME(PERFORMANCE L70)	: ≥50.000 Saat/Hours

## OPSİYONEL ÖZELLİKLER/OPTIONAL SPECS

1 SAAT ACİL AYDINLATMA KİTİ/ 1 HOUR EMERG UNIT	: ✓
3 SAAT ACİL AYDINLATMA KİTİ/3 HOUR EMERG UNIT	: ✓
DIM/ DIMMING	: ✓
DALI	: ✓


## FOTOMETRİK EĞRİ/LIGHT DISTRIBUTION CURVE

## Işık Dağılım Eğrisi/Light Distribution Curve

## AAI FIGURE

Armatür farklı mesafelerde olduğunda aydınlatılmış alanı ve ortalama aydınlatmayı belirtir.

The curves indicate the illuminated area and the average illumination when the luminaire is at a different distance

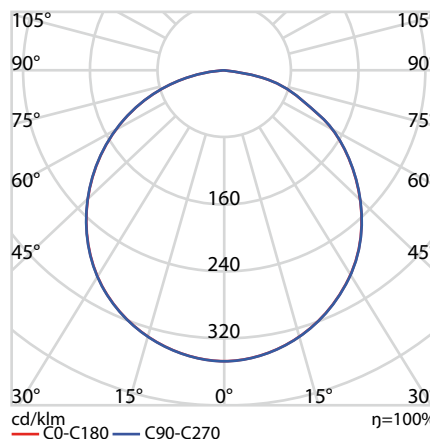

Flux out :978.7lm

Height	Eavg, Emax	Angle :112.96deg	Diameter
1m	131.4,461.5lx		301.93cm
2m	32.85,115.4lx		603.87cm
3m	14.60,51.28lx		905.80cm
4m	8.211,28.84lx		1207.73cm
5m	5.255,18.46lx		1509.67cm
6m	3.650,12.82lx		1811.60cm
7m	2.661,9.418lx		2113.54cm
8m	2.053,7.211lx		2415.47cm
9m	1.622,5.697lx		2717.40cm
10m	1.314,4.615lx		3019.34cm