

ÜRÜN KODU/PRODUCT CODE	: 24YX06
ÜRÜN ADI/PRODUCT NAME	: SIVA ALTI LED DOWNLIGHT 2W/FLUSH MOUNTED LED DOWNLIGHT 2W
ÜRÜN BİLGİSİ/PRODUCT INFORMATION	
GÖVDE/BODY	: ALUMİNYUM/ALUMINUM
KAPAK/COVER	: ALUMİNYUM/ALUMINUM
LENS/LENS	: POLİKARBON/POLYCARBONATE
IP KORUMA SINIFI/IP PROTECTION	: IP20 Class II
KULLANIM ŞEKLİ/FIELDS OF APPLICATION	: İÇ AYDINLATMA/INDOOR LIGHTING
LED	: POWER LED
24YX06	X=3 3000K 6 6500K
→ Işık Rengi/Light Color	Y= 0 Beyaz/White 1 Saten Nikel/Saten Nickel 3 Siyah/Black 4 Krom/Chrome
→ Gövde Rengi/Body Color	

ELEKTRİKSEL ÖZELLİKLER/ELECTRICAL SPECS

TÜKETİM GÜCÜ/POWER	: 2W
GİRİŞ GERİLİMİ/INPUT VOLTAGE	: AC 220V
GİRİŞ AKIMI/INPUT CURRENT	: 0.03 A
FREKANS/FREQUENCY	: 50 Hz
GÜÇ FAKTÖRÜ/POWER FACTOR	: 0.45
ÇIKIŞ GERİLİMİ/OUTPUT VOLTAGE	: 2-4VDC
ÇIKIŞ AKIM/OUTPUT CURRENT	: 0.5 A
THD(TOTAL HARMONIC DISTORTION)	: >%20

FOTOMETRİK ÖZELLİKLER/PHOTOMETRIC SPECS

RENK SICAKLIĞI/KELVIN TEMPERATURE(CCT)	: 3000K 6500K
İŞİK AÇISI/LIGHT BEAM ANGLE	: 30°
İŞİK AKISI/LUMEN	: 90 100
RENKSEL GERİ VERİM/COLOR RENDERING INDEX (CRI)	: Ra>80
VERİM/EFFICIENCY	: 40Lm/W

DİĞER ÖZELLİKLER/OTHER SPECS

ÇALIŞMA SICAKLIĞI/OPERATING TEMPERATURE(CCT)	: -10°C,50°C
LED ÖMRÜ/LED LIFE TIME (PERFORMANCE L70)	: ≥50.000 Saat/Hours


FOTOMETRİK EĞRİ/LIGHT DISTRIBUTION CURVE

Işık Dağılım Eğrisi/Light Distribution Curve

AAI FIGURE

Armatür farklı mesafelerde olduğunda aydınlatılmış alanı ve ortalama aydınlatmayı belirtir.

The curves indicate the illuminated area and the average illumination when the luminaire is at a different distance

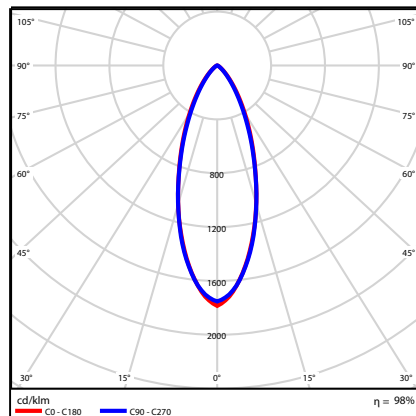

Flux out: 43.14 lm

Height	Avrg, Emax	Angle: 39.96deg	Diameter
1m	103.6, 160.71 x		72.71cm
2m	25.91, 40.161 x		145.42cm
3m	11.52, 17.851 x		218.13cm
4m	6.478, 10.041 x		290.84cm
5m	4.146, 6.4261 x		363.54cm
6m	2.879, 4.4631 x		436.25cm
7m	2.115, 3.2791 x		508.96cm
8m	1.619, 2.5101 x		581.67cm
9m	1.280, 1.9831 x		654.38cm
10m	1.036, 1.6071 x		727.09cm