



ÜRÜN KODU/PRODUCT CODE	: 260X12
ÜRÜN ADI/PRODUCT NAME	: SIVA ÜSTÜ SLIM LED DOWNLIGHT 24W/SURFACE MOUNTED SLIM LED DOWNLIGHT 24W
ÜRÜN BİLGİSİ/ PRODUCT INFORMATION	
GÖVDE/BODY	: ALÜMİNYUM/ALUMİNYUM
DİFÜZÖR/DIFFUSOR	: OPAL POLİSTREN DİFÜZÖR/OPAL POLYSTRENE DIFFUSER
OPTİK/OPTICAL	: PMMA LGP
IP KORUMA SINIFI/ IP PROTECTION	: IP20- CLASS II
KULLANIM ŞEKLİ/FIELDS OF APPLICATION	: SIVA ÜSTÜ/SURFACE MOUNTED
LED	: SMD LED

26YX12

→ Işık Rengi/Light Color
→ Gövde Rengi/Body Color

Y= 0 Beyaz/White 2 GRİ/GRAY 3 SİYAH/BLACK
X=3 3000K 4 4000K 6 6500K

ELEKTRİKSEL ÖZELLİKLER/ELECTRICAL SPECS

TÜKETİM GÜCÜ/ POWER	: 24W
GİRİŞ GERİLİMİ/ INPUT VOLTAGE	: AC 220V
GİRİŞ AKIMI/ INPUT CURRENT	: 0.215 A
FREKANS/FREQUENCY	: 50 Hz
GÜÇ FAKTÖRÜ/POWER FACTOR	: 0.47
ÇIKIŞ GERİLİMİ/ OUTPUT VOLTAGE	: DC 60-80V
ÇIKIŞ AKIMI/ OUTPUT CURRENT	: 0.3 A
THD(TOTAL HARMONIC DISTORTION)	: >%20

FOTOMETRİK ÖZELLİKLER/PHOTOMETRIC SPECS

RENK SICAKLIĞI/ KELVIN TEMPERATURE(CCT)	: 3000K 4000K 6500K
IŞIK AÇISI/ LIGHT BEAM ANGLE	: 110°
IŞIK AKISI/ LUMEN	: 1332 1435 1500
RENKSEL GERİ VERİM/ COLOR RENDERING INDEX (CRI)	: Ra>80
VERİM/ EFFICIENCY	: 60lm/W

DİĞER ÖZELLİKLER/OTHER SPECS

ÇALIŞMA SICAKLIĞI/OPERATING TEMPERATURE(CCT)	: -10°C,50°C
LED ÖMRÜ/LED LIFE TIME(PERFORMANCE L70)	: ≥50.000 Saat/Hours

OPSİYONEL ÖZELLİKLER/OPTIONAL SPECS

1 SAAT ACİL AYDINLATMA KİTİ/ 1 HOUR EMERG UNIT	: ✓
3 SAAT ACİL AYDINLATMA KİTİ/ 3 HOUR EMERG UNIT	: ✓
DİM/ DIMMING	: ✓
DALI	: ✓


FOTOMETRİK EĞRİ/LIGHT DISTRIBUTION CURVE

Işık Dağılım Eğrisi/Light Distribution Curve

AAI FIGURE

Armatür farklı mesafelerde olduğunda aydınlatılmış alanı ve ortalama aydınlatmayı belirtir.

The curves indicate the illuminated area and the average illumination when the luminaire is at a different distance

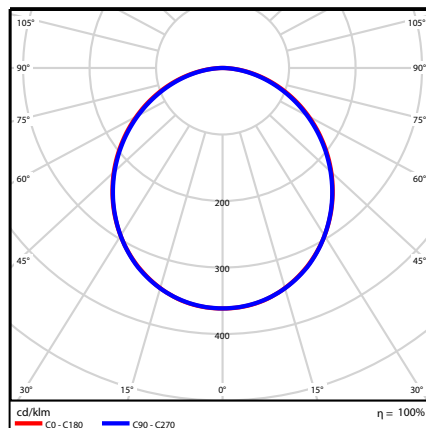

Height	Avg. Emx	Angle: 108.77deg	Diameter
1m	167.7, 543.8lx		279.20cm
2m	41.93, 136.0lx		558.40cm
3m	18.64, 60.43lx		837.61cm
4m	10.48, 33.99lx		1116.81cm
5m	6.709, 21.75lx		1396.01cm
6m	4.659, 15.11lx		1675.21cm
7m	3.423, 11.10lx		1954.42cm
8m	2.621, 8.498lx		2233.62cm
9m	2.071, 6.714lx		2512.82cm
10m	1.677, 5.438lx		2792.02cm