



DP

MULTIFUNCTIONAL TANKS WITH FIXED BUTYL DIAPHRAGM AND INSULATED PROTECTIVE SHEATH

5 - 500 litres



CE Approval



For drinking water



For sanitary hot water



For heating systems



For air conditioning systems




For booster pumping systems




Shock suppressor




DP 5 - 35

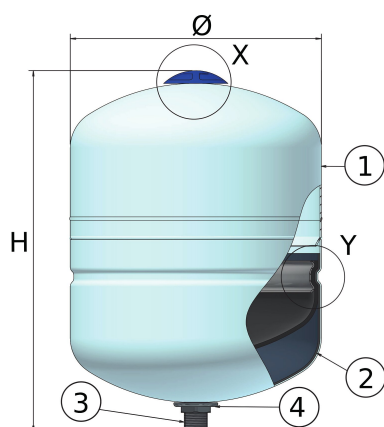

DPV 50 - 500

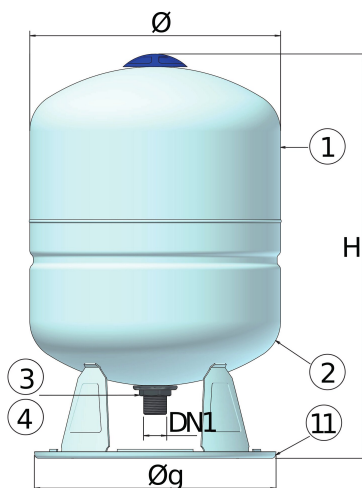

DPH - CE 18 - 24

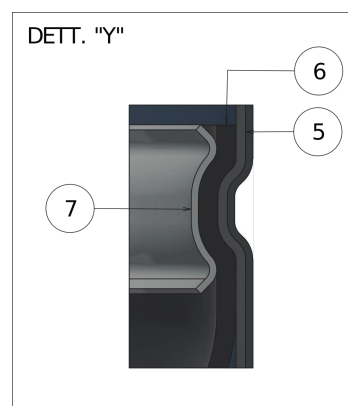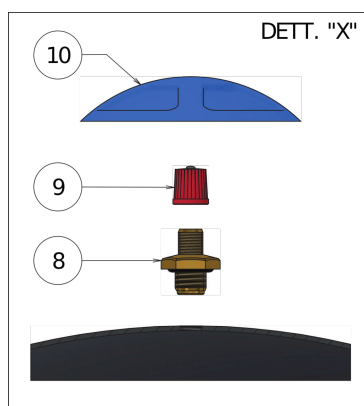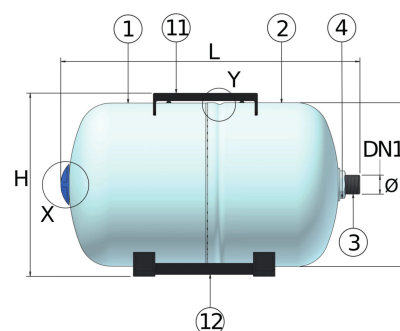

Keyword

DN	Description
DN1	Water connection

LEGENDA

10: Air valve protection;

11: Base;

12: Support saddle.

Model	Code	Capacity L	Tmin	Tmax	P _{PRE}	P _{MAX}	H mm	L mm	Ø skirt mm	Ø mm	Packing mm	Dim. plt mm
DP 5	A2C2L11 V0020	5	-10°C	99°C	2.5	10	225			205	215x215x245	1000x500x1000
DP 8	A2C2L16 V0020	8	-10°C	99°C	2.5	10	290			205	215x215x305	
DP 11	A2C2L19 V0020	11	-10°C	99°C	2.5	10	305			270	280x280x325	
DP 18	A2C2L24 V0020	18	-10°C	99°C	2.5	10	400			270	280x280x420	
DP 24	A2C2L27 V0020	24	-10°C	99°C	2.5	10	500			270	280x280x520	
DP 24 /16	A2C2R27 V0020	24	-10°C	99°C	2.5	16	500			270	280x280x520	
DP 35	A2C2L31 V0020	35	-10°C	99°C	2.5	10	400			400	415x415x430	
DPH 20	A2E2L25 V0020	20	-10°C	99°C	2.5	10	285	440		270	315x315x460	
DPH 20 att. 3/4"	A2F2L25 V0020	20	-10°C	99°C	2.5	10	305	440		270	315x315x460	
DPH 24	A2E2L27 V0020	24	-10°C	99°C	2.5	10	305	500		270	315x315x520	
DPH 24 att. 3/4"	A2F2L27 V0020	24	-10°C	99°C	2.5	10	305	500		270	315x315x520	
DPH 60	A2E2L35 V0020	60	-10°C	99°C	2.5	10	440	630		400	660x465x470	
DPV 50	A2C2L34 V0020	50	-10°C	99°C	2.5	10	565		330	400	415x415x590	
DPV 80	A2C2L37 V0020	80	-10°C	99°C	2.5	10	820		330	400	415x415x835	
DPV 100	A2C2L38 V0020	100	-10°C	99°C	2.5	10	740		330	500	515x515x755	
DPV 150	A2C2L43 V0020	150	-10°C	99°C	2.5	10	950		330	500	515x515x965	
DPV 200	A2C2L47 V0020	200	-10°C	99°C	2.5	10	1025		485	600	615x615x1045	
DPV 300	A2C2L51 V0020	300	-10°C	99°C	2.5	10	1190		485	650	665x665x1205	
DPV 500	A2C2L55 V0020	500	-10°C	99°C	2.5	10	1335		485	775	790x790x1350	

Connection sizes

MODEL	DN1
DP 5	G3/4"
DP 8	G3/4"
DP 11	G3/4"
DP 18	G3/4"
DP 24	G1"
DP 24 /16	G1"
DP 35	G1"
DPH 20	G1"
DPH 20 att. 3/4"	G3/4"
DPH 24	G1"
DPH 24 att. 3/4"	G3/4"
DPH 60	G1"
DPV 50	G1"
DPV 80	G1"
DPV 100	G1"
DPV 150	G1"1/4
DPV 200	G1"1/4
DPV 300	G1"1/4
DPV 500	G1"1/4



TECHNICAL SHEET

AZIENDA CON
SISTEMA DI GESTIONE QUALITA'
CERTIFICATO DA DNV
ISO 9001

Reference standards

Declaration of conformity to essential safety requirements specified in 2014/68/UE Directive
CE certified

Warranty: 5 years

Materials

Cylinder in carbon steel. External epoxy white.

These articles are suitable for operation with water or with water-glycol mixture up to 50% glycol content

Fixed bladder in butyl rubber suitable for contact with potable water.

Ver. date 17/05/2026