



TRANSFORMING WINDOWS

Fitting Instructions

for roller blinds
(R40)



Fitting Instructions

for roller blinds
(R40)




Fitting Instructions

Roller blinds (R40)

Safety Instructions:

1. Loops in pull cords, chains, tapes and inner cords that operate the product can cause strangulation
2. To avoid strangulation and entanglement, keep cords out of the reach of young children. Cords may become wrapped around a child's neck
3. Move beds, cots and furniture away from window covering cords
4. Do not tie cords together. Make sure cords do not twist and create a loop

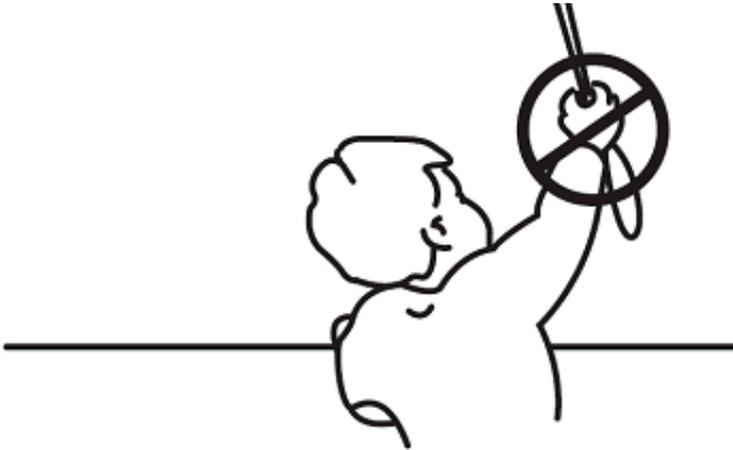


N.B. For more information and child safety device fitting instructions, see Point 7 on Page 5 and Point 10 on Page 6 & 7.

Fitting Instructions

Roller blinds (R40)


R40 (36/53/70) Sidewider Control:

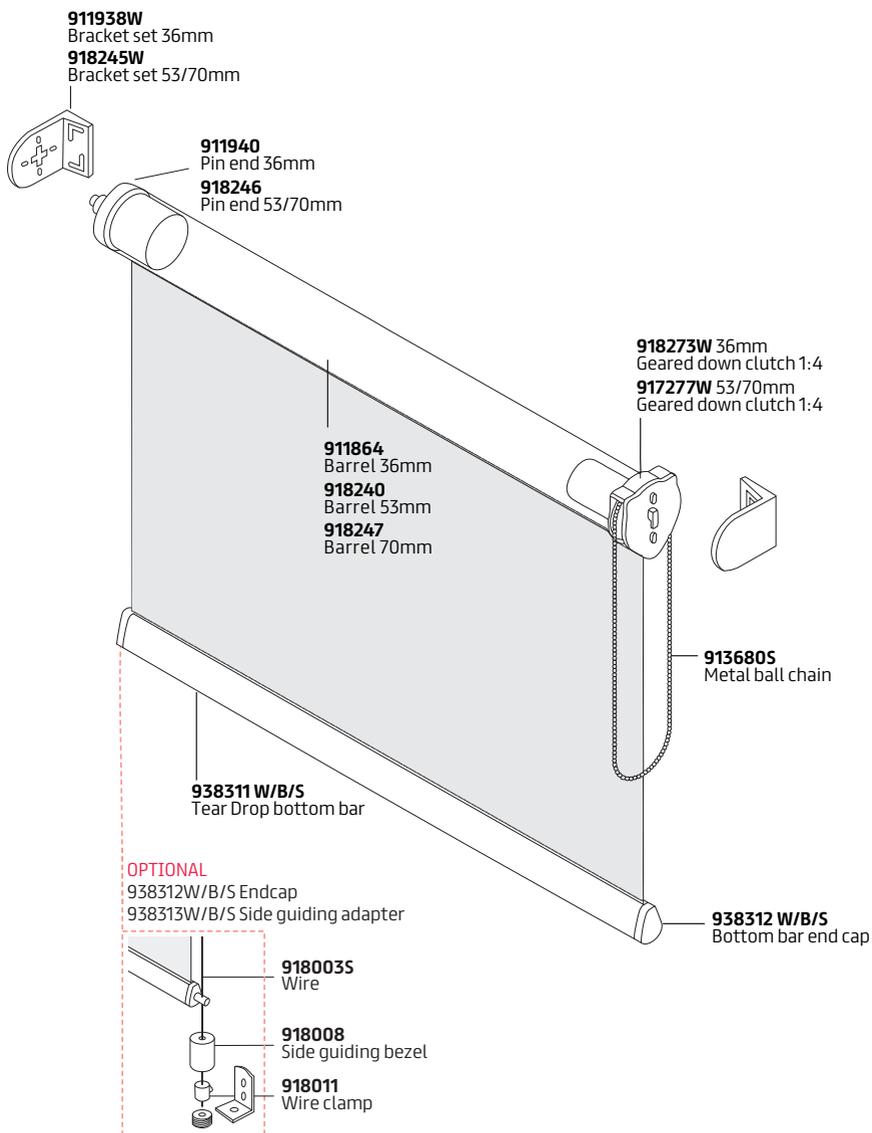

R40 (36/53/70) Sidewider Control:

N.B. This blind should be installed by a person competent in DIY. If in doubt please consult a professional.

1. The universal plastic or plastic/metal brackets supplied with the blind may be top or face-fixed.
2. Check that the blind fits correctly. The fabric should roll off the BACK of the barrel, unless ordered as a reverse-roll.
3. Fix the control-end bracket using appropriate screws/plugs.
4. Locate the blind in the control-end bracket, and mark position of pin-end bracket.
5. Remove blind and fix pin-end bracket using appropriate screws/plugs.
6. Retract pin in pin-end by turning serrated wheel. Locate lug on control-end into bracket. The lug must be vertical and must drop down into the cross-shaped opening. Position the pin-end and extend the pin into the bracket by turning the wheel.
7. Ensure the relevant child safety device is used to comply with BS EN13120:2009+A1:2014, BS EN16433:2014 and BS EN16434:2014 as follows:

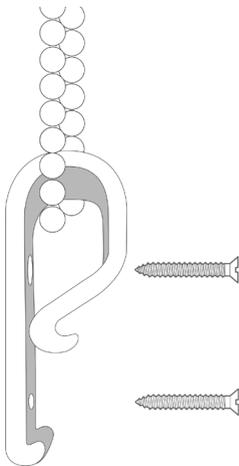

Chain Tidy

The chain tidy will be attached to the chain when the blind arrives. The chain tidy should be at a maximum distance from the control mechanism, keeping the chain taut (not under excessive tension however as this could negatively affect the longevity and operation of the blind). Put the retaining device on the wall, mark fixing holes with a pencil, drill the holes and screw the device to the wall with suitable fixings.

NB. To operate correctly, blind **MUST** be fixed level.

Fitting Instructions

Roller blinds (R40)


R40-53, R40-70:

8. Insert the pin in the pin-end of the blind into the bracket. Insert the lug on the control-end into bracket. The lug must be vertical and must drop down into the cross-shaped opening.

9. Check that the blind operates correctly.

NB. Large blinds are heavy and it is important that the correct fixings are used.

10. Ensure the relevant child safety device is used to comply with BS EN13120:2009+A1:2014, BS EN16433:2014 and BS EN16434:2014 as follows:

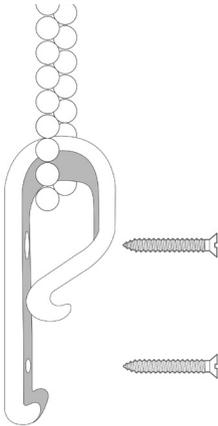

Chain Tidy

The chain tidy will be attached to the chain when the blind arrives. The chain tidy should be at a maximum distance from the control mechanism, keeping the chain taut (not under excessive tension however as this could negatively affect the longevity and operation of the blind). Put the retaining device on the wall, mark fixing holes with a pencil, drill the holes and screw the device to the wall with suitable fixings.



TRANSFORMING WINDOWS

Vale Blinds Direct Limited, Mulberry
House, Station Road, Bottesford,
Nottinghamshire, NG13 0EN
Call 01949 845399
Fax 0845 0090281
Email info@valeblinds.com
Visit www.valeblinds.com

For more information on all
products, please call the sales
department.