


# Automatic level controller

## Sliding buoy type automatic level controller

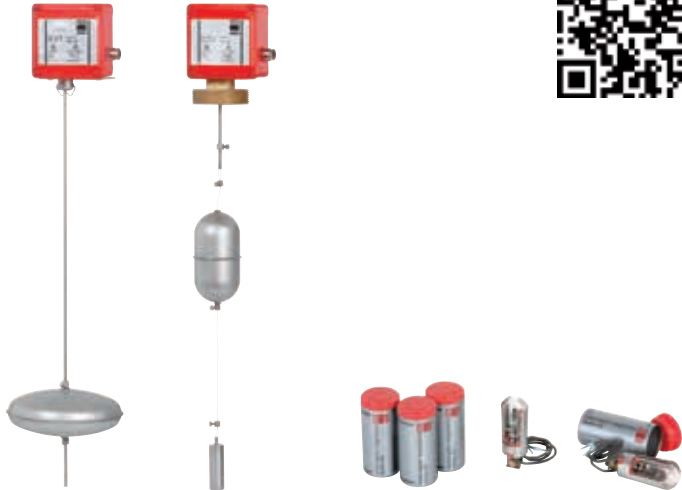

290


291

262

### Mod. 290 EN

Connection: Bracket with 2 screws M.8 x...  
 Material:  Stainless steel  
 Standard level fluctuation: 495 mm.  
 Buoy: Ø150x60 sliding  
 Maximum n° of switches: 1

### Mod.291 EN

Connection: Female thread  
 R: 2 1/2"  
 Material:  Stainless steel - Brass. PMS-19 bar  
 Standard level fluctuation: 3.000 mm.  
 Maximum level fluctuation: 30.000 mm.  
 Buoy: Ø60x120 sliding  
 Maximum n° of switches: 1

This device guarantees automatic, safe and reliable control, regulation and signalling of the level of liquids in: wells, tanks, cisterns, etc.

Depending on version



## Buoy type automatic level controller





CC

CM


SC

### Mod. 076 EN

Connection: Flange  
 DN: 25  
 Connection (SC): Flange with 4 screws M. 16x40  
 Material:  Cast iron. PN-16  
 Stainless steel. PN-16 (SC)  
 Standard level fluctuation: 120 mm.  
 Buoy: Ø60x120  
 Maximum n° of switches: 10  
 Distance between centres of flanges: 190 or 250 mm.  
 Viewer (CM): F =Front. D =Right. I =Left  
 Blowoff valve: Mod. 999 1/2" with simple joint plug

This device guarantees automatic, safe and reliable control, regulation and signalling of the level of liquids in: steam boilers, pressurised vessels, preheaters, processes, etc.

Depending on version



### Mod. 262

Connection: M.4  
 Voltage: 220 V.A.C  
 To be meant for Mod. 290, 291 and 076