

Primo



PO

MT

Noce
IV

V

20"x20" / 13"x13" Rectified Porcelain



20"x20" / 13"x13" Rectified Porcelain



Primo Chiaro



Primo Silver




Primo Classico



Primo Noce

Special Trims

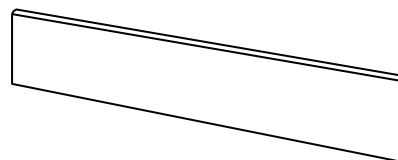

Bullnose 3"x13"
44 pcs/box

Packing	Pieces/box	SF/box	Lb/box
20"x20"	6	16.14	69.7
13"x13"	12	14.31	57.4
3"x13"	44		52.4

Icons



Floor tile



PEI



Porcelain



Matt

Technical characteristics	Results	Tested performed
Thickness	9,5 mm.	
Size, thickness, side straightness, orthogonality, flatness	It accomplishes requirements UNE 67176 (en 176)	UNE-EN ISO 10545-2
Water absorption capacity	< 0.5%	UNE-EN ISO 10545-3
Flexion resistance n/mm2	> 35 N/mm2	UNE-EN ISO10545-4
Frost resistance	It stands the test	UNE-EN ISO 10545-12
Resistance to álcalis and acids	Type B Min	UNI EN ISO 10545-13
***ASTM C-1028 Coefficient of Friction exceed A.D.A. recommendation wet >0.60 dry>0.60		

Distributed by:



3215 Corridor Dr. • Mira Loma, CA 91752

Tel. (626) 961-0051 • Fax (626) 336-2217

www.panamericanceramics.com