

NORÍ

pan
american
ceramics



Taupe



Rosso



Bianco




Nero



Grigio



**BIANCO
LOSANGA MOSAIC**
12"x12,5"



BIANCO MOSAIC
2"x2" (12"x12" sheet)



BIANCO 12"x24"



BIANCO 18"x36"



**GRIGIO
LOSANGA MOSAIC**
12"x12,5"



GRIGIO MOSAIC
2"x2" (12"x12" sheet)



GRIGIO 12"x24"



GRIGIO 18"x36"




**ROSSO
LOSANGA MOSAIC**
12"x12,5"



ROSSO MOSAIC
2"x2" (12"x12" sheet)




ROSSO 12"x24"

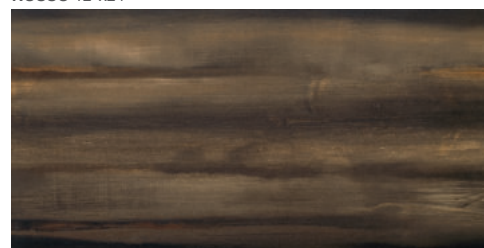

ROSSO 18"x36"



**TAUPE
LOSANGA MOSAIC**
12"x12,5"



TAUPE MOSAIC
2"x2" (12"x12" sheet)




TAUPE 12"x24"




TAUPE 18"x36"



**NERO
LOSANGA MOSAIC**
12"x12,5"




NERO MOSAIC
2"x2" (12"x12" sheet)



NERO 12"x24"



NERO 18"x36"



BIANCO BULLNOSE 3,5"x24"
GRIGIO BULLNOSE 3,5"x24"
ROSSO BULLNOSE 3,5"x24"
TAUPE BULLNOSE 3,5"x24"
NERO BULLNOSE 3,5"x24"

Technical data conform to:

	Abrasion resistance	ISO 10545-7	PEI IV		Slipperiness	DIN 51130	R9
	Breaking modulus	ISO 10545-4	40/55 N/mm²		Slipperiness	ANSI A137-1	> 0,42
	Mohs hardness	EN101	6		Slip resistance	DIN 51097	B
	Glaze resistance to acid and alkaline attack	ISO 10545-13	Resists		Slipperiness B.C.R.A.	TORTUS	> 0,40
	Resistance to frost	ISO 10545-12	Frost proof		Water absorption	ISO 10545-3	≤ 0,5%
	Stain resistance	ISO 10545-14	Complete				

Packing

SIZE	PCS/CTN	SF/CTN	LBS/CTN	CTN/PLT	SF/PAL	THICKNESS
field 18"x36"	3	13.3639	63.14	32	427.6448	10 mm
field 12"x24"	6	11.6208	51.48	40	464.832	10 mm
mosaic 2"x2" (12"x12" sheet)	4		13.80			10 mm
losanga mosaic 12"x12,5"	4		19.36			10 mm
bullnose 3,5"x24"	12		31.6356			10 mm