

marmobianco 12"x24", 12"x12", 4"x12", 3"x6"



MARMOBIANCO 12"x24" rett



MARMOBIANCO 3"x6" lappato sfuso



MARMOBIANCO 12"x24" rett




MARMOBIANCO lappato 12"x24", 4"x12"



MARMOBIANCO lappato 12"x24", 4"x12"

marmobianco 12"x24", 12"x12", 4"x12", 3"x6"

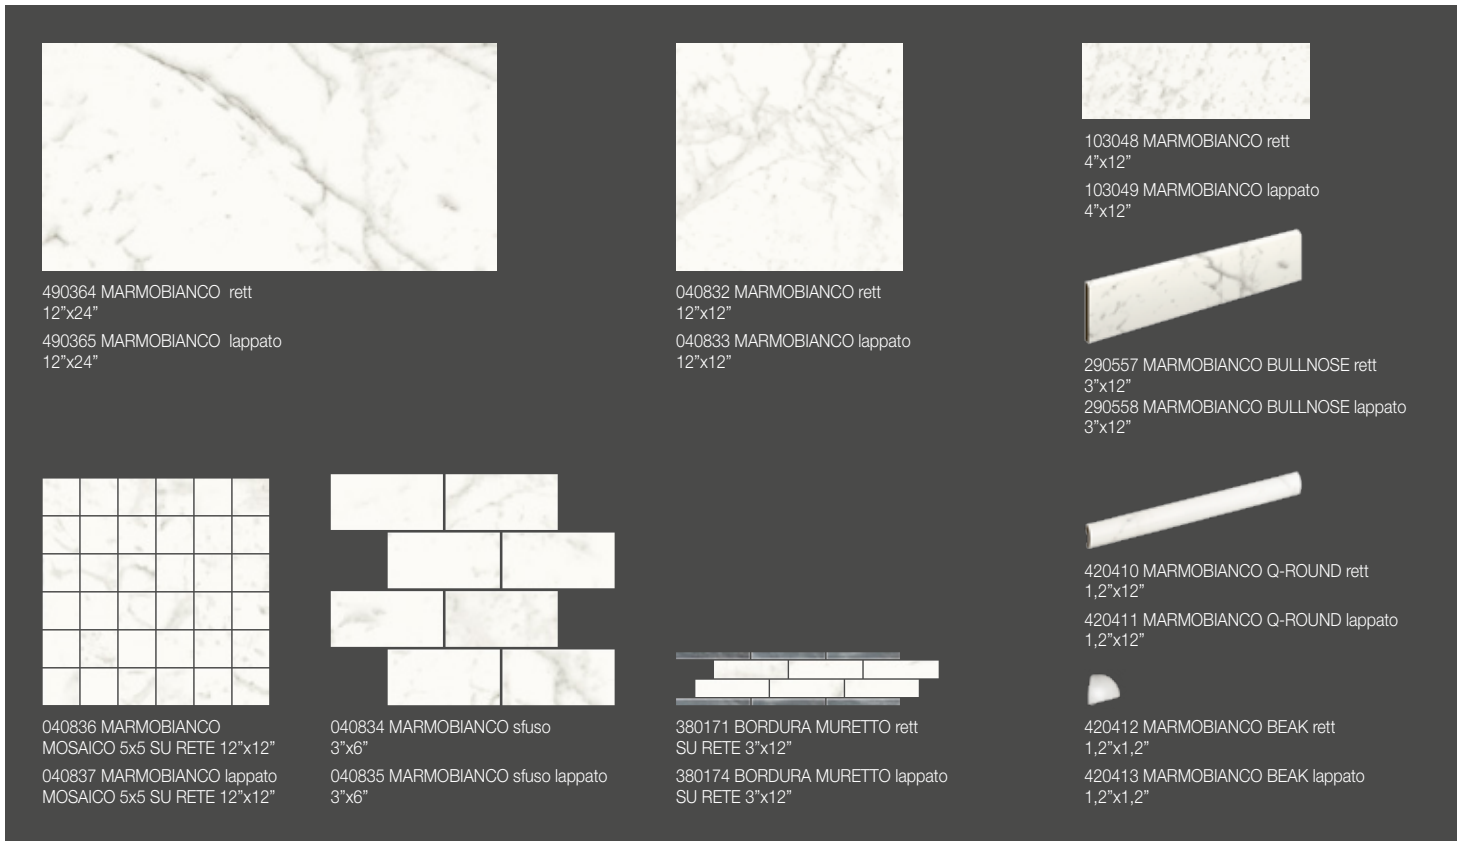

PACKAGING INFORMATION

FORMAT	pc		BOX		PALLET	
	sf	lbs	sf	lbs	sf	lbs
12"x24"	6	11.6208	53.856	40	464.83	2,154.24
12"x12"	11	10.6524	51.04	46	490.01	2,347.84
4"x12"	20	6.4560	33.0	84	542.30	2,772
3"x6"	50	6.0256	24.86	76	457.94	1,889.36
2"x2" MESH (12"x12" SHEET)	11	-	41.36	-	-	-
3"x12" BORDURA MURETTO	10	-	9.9	-	-	-
1"x12" QUARTER ROUND	24	-	14.96	-	-	-
3"x12" BULLNOSE	40	-	46.4	-	-	-

QUALITY CHARACTERISTICS	NORM	REQUIRED STANDARDS	RESULT
Water absorption of the body	ISO 10545-3	≤ 0,5	0,03%
Breaking strenght	ISO 10545-4	≥ 35 N/mm ²	52 N/mm ²
Abrasion resistance	ISO 10545-7	MARMOBIANCO RETTIFICATO MARMOBIANCO LAPPATO	PEI IV
Frost resistance	ISO 10545-12	No samples must show ruptures or noticeable surface alteration	Conformity
Chemical resistance	ISO 10545-13	No samples must show visible signs of chemical attack	Conformity
Thermal shock resistance	ISO 10545-5		Conformity
Sliding resistance	DIN 51130 R	MARMOBIANCO RETTIFICATO MARMOBIANCO LAPPATO	R9
Moderate variation			V3