





DATA SHEET

SAP CODE	225000345	 <p>The color presented in the photograph It is an approximation to the real color.</p>
REFERENCE NAME	QUA 1X6 SAHARA INSIDE CORNER	
NOMINAL SIZE (cm) OR (in)	6 X 1 (in)	
ABSORPTION GROUP ACCORDING TO THE ESTÁNDAR ISO 13006	Group Alla (Part) 1 /Annex B	
USE	FLOOR	
TRAFFIC	HIGH COMMERCIAL	
MANUFACTURING THICKNESS (mm) OR (in)	10.5	
m2 OR (ft2) BOX	10	
TONE VARIATION ACCORDING TO THE STANDARD ANSI A137-1	V4	


TECHNICAL CHARACTERISTICS ACCORDING TO THE ESTÁNDAR ISO 13006	TEST	SPECIFICATION	ALFAGRES
LENGHT AND WIDTH	NTC 4321 - 2 ISO 10545 - 2	± 2,0 % to a maximum of ± 4 mm or 0.16 (in)	< 1%
THICKNESS	NTC 4321 - 2 ISO 10545 - 2	± 10 %	< 10 %
SURFACE DEFECTS	NTC 4321 - 2 ISO 10545 - 2	Minimum 95% without defects	Minimum 95% without defects
WATER ABSORPTION	NTC 4321 - 3 ISO 10545 - 3	3,0 % < Eb ≤ 6,0 % Individual maximum 6,5 %	< 6 %
FROST RESISTANCE	NTC 4321 - 12 ISO 10545 - 12	Test method available	Resistant
RESISTANCE TO CHEMICALS	NTC 4321 - 13 ISO 10545 - 13	Resistance to household chemicals and swimming poolsalts Minimum B	A class (There is no visible effect)
		Resistance to low concentrations of acids and alkali. Manufactureris to state classification	BA class (There is no visible effect)




V0
Very Uniform Appearance




V1
Uniform Appearance



V2
Slight Variation



V3
Moderate Variation

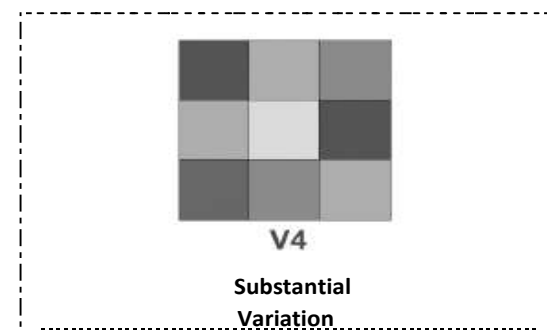


V4
Substantial Variation

Note:

- 1 For more information about this product, contact our customer service line in Bogotá 331 1531, national 018000914900 or via mail:
- 2 For areas where greater slip resistance is required, use products with DCOF CLASS 2
- 3 Manufactured by ALFAGRES S.A In Colombia.
- 4 First quality
- 5 Surface Unglazed
- 6 Mr. consumer, please carefully check the identification of the material, the batch and the production date found on the physical product packaging.
- 7 Consult the installation and maintenance manual for its correct use.
- 8 Specification according to ISO 13006 - NTC 919 (Colombian Technical Standard)

DATA SHEET

SAP CODE	225000348	 <p>The color presented in the photograph It is an approximation to the real color.</p>
REFERENCE NAME	QUA 1X6 SAHARA OUTSIDE CORNER	
NOMINAL SIZE (cm) OR (in)	6 X 1 (in)	
ABSORPTION GROUP ACCORDING TO THE ESTÁNDAR ISO 13006	Group Alla (Part) 1 /Annex B	
USE	FLOOR	
TRAFFIC	HIGH COMMERCIAL	
MANUFACTURING THICKNESS (mm) OR (in)	10.5	
m2 OR (ft2) BOX	10	
TONE VARIATION ACCORDING TO THE STANDARD ANSI A137-1	V4	


TECHNICAL CHARACTERISTICS ACCORDING TO THE ESTÁNDAR ISO 13006	TEST	SPECIFICATION	ALFAGRES
LENGHT AND WIDTH	NTC 4321 - 2 ISO 10545 - 2	± 2,0 % to a maximum of ± 4 mm or 0.16 (in)	< 1%
THICKNESS	NTC 4321 - 2 ISO 10545 - 2	± 10 %	< 10 %
SURFACE DEFECTS	NTC 4321 - 2 ISO 10545 - 2	Minimum 95% without defects	Minimum 95% without defects
WATER ABSORPTION	NTC 4321 - 3 ISO 10545 - 3	3,0 % < Eb ≤ 6,0 % Individual maximum 6,5 %	< 6 %
FROST RESISTANCE	NTC 4321 - 12 ISO 10545 - 12	Test method available	Resistant
RESISTANCE TO CHEMICALS	NTC 4321 - 13 ISO 10545 - 13	Resistance to household chemicals and swimming poolsalts Minimum B	A class (There is no visible effect)
		Resistance to low concentrations of acids and alkali. Manufactureris to state classification	BA class (There is no visible effect)




V0
Very Uniform
Appearance




V1
Uniform
Appearance



V2
Slight
Variation



V3
Moderate
Variation

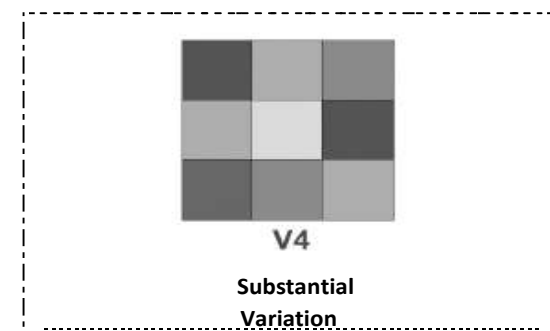


V4
Substantial
Variation

Note:

- For more information about this product, contact our customer service line in Bogotá 331 1531, national 018000914900 or via mail:
- For areas where greater slip resistance is required, use products with DCOF CLASS 2
- Manufactured by ALFAGRES S.A In Colombia.
- First quality
- Surface Unglazed
- Mr. consumer, please carefully check the identification of the material, the batch and the production date found on the physical product packaging.
- Consult the installation and maintenance manual for its correct use.
- Specification according to ISO 13006 - NTC 919 (Colombian Technical Standard)

DATA SHEET

SAP CODE	225000344	 <p>The color presented in the photograph It is an approximation to the real color.</p>
REFERENCE NAME	QUA 1X6 SPANISH RED INSIDE CORNER	
NOMINAL SIZE (cm) OR (in)	6 X 1 (in)	
ABSORPTION GROUP ACCORDING TO THE ESTÁNDAR ISO 13006	Group Alla (Part) 1 /Annex B	
USE	FLOOR	
TRAFFIC	HIGH COMMERCIAL	
MANUFACTURING THICKNESS (mm) OR (in)	10.5	
m2 OR (ft2) BOX	10	
TONE VARIATION ACCORDING TO THE STANDARD ANSI A137-1	V4	

TECHNICAL CHARACTERISTICS ACCORDING TO THE ESTÁNDAR ISO 13006	TEST	SPECIFICATION	ALFAGRES
LENGHT AND WIDTH	NTC 4321 - 2 ISO 10545 - 2	± 2,0 % to a maximum of ± 4 mm or 0.16 (in)	< 1%
THICKNESS	NTC 4321 - 2 ISO 10545 - 2	± 10 %	< 10 %
SURFACE DEFECTS	NTC 4321 - 2 ISO 10545 - 2	Minimum 95% without defects	Minimum 95% without defects
WATER ABSORPTION	NTC 4321 - 3 ISO 10545 - 3	3,0 % < Eb ≤ 6,0 % Individual maximum 6,5 %	< 6 %
FROST RESISTANCE	NTC 4321 - 12 ISO 10545 - 12	Test method available	Resistant
RESISTANCE TO CHEMICALS	NTC 4321 - 13 ISO 10545 - 13	Resistance to household chemicals and swimming poolsalts Minimum B	A class (There is no visible effect)
		Resistance to low concentrations of acids and alkali. Manufactureris to state classification	BA class (There is no visible effect)




V0

Very Uniform
Appearance




V1

Uniform
Appearance




V2

Slight
Variation



V3

Moderate
Variation

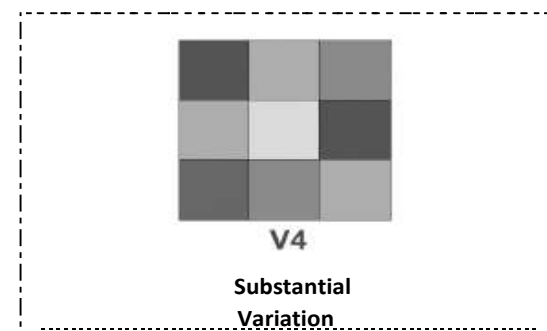


V4






Substantial
Variation

Note:

- 1 For more information about this product, contact our customer service line in Bogotá 331 1531, national 018000914900 or via mail:
- 2 For areas where greater slip resistance is required, use products with DCOF CLASS 2
- 3 Manufactured by ALFAGRES S.A In Colombia.
- 4 First quality
- 5 Surface Unglazed
- 6 Mr. consumer, please carefully check the identification of the material, the batch and the production date found on the physical product packaging.
- 7 Consult the installation and maintenance manual for its correct use.
- 8 Specification according to ISO 13006 - NTC 919 (Colombian Technical Standard)

DATA SHEET

SAP CODE	225000347	 <p>The color presented in the photograph It is an approximation to the real color.</p>
REFERENCE NAME	QUA 1X6 SPANISH RED OUTSIDE CORNER	
NOMINAL SIZE (cm) OR (in)	6 X 1 (in)	
ABSORPTION GROUP ACCORDING TO THE ESTÁNDAR ISO 13006	Group Alla (Part) 1 /Annex B	
USE	FLOOR	
TRAFFIC	HIGH COMMERCIAL	
MANUFACTURING THICKNESS (mm) OR (in)	10.5	
m2 OR (ft2) BOX	10	
TONE VARIATION ACCORDING TO THE STANDARD ANSI A137-1	V4	


TECHNICAL CHARACTERISTICS ACCORDING TO THE ESTÁNDAR ISO 13006	TEST	SPECIFICATION	ALFAGRES
LENGHT AND WIDTH 	NTC 4321 - 2 ISO 10545 - 2	± 2,0 % to a maximum of ± 4 mm or 0.16 (in)	< 1%
THICKNESS 	NTC 4321 - 2 ISO 10545 - 2	± 10 %	< 10 %
SURFACE DEFECTS	NTC 4321 - 2 ISO 10545 - 2	Minimum 95% without defects	Minimum 95% without defects
WATER ABSORPTION 	NTC 4321 - 3 ISO 10545 - 3	3,0 % < Eb ≤ 6,0 % Individual maximum 6,5 %	< 6 %
FROST RESISTANCE 	NTC 4321 - 12 ISO 10545 - 12	Test method available	Resistant
RESISTANCE TO CHEMICALS 	NTC 4321 - 13 ISO 10545 - 13	Resistance to household chemicals and swimming poolsalts Minimum B	A class (There is no visible effect)
		Resistance to low concentrations of acids and alkali. Manufactureris to state classification	BA class (There is no visible effect)




V0
Very Uniform Appearance




V1
Uniform Appearance



V2
Slight Variation



V3
Moderate Variation

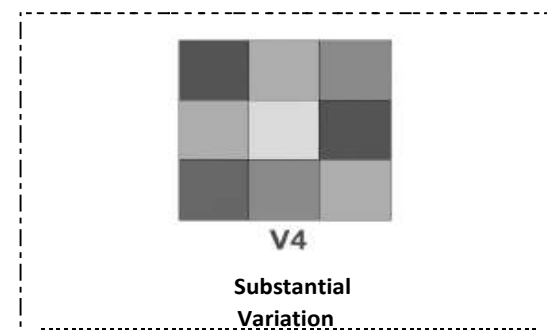

V4
Substantial Variation

Note:

- 1 For more information about this product, contact our customer service line in Bogotá 331 1531, national 018000914900 or via mail:
- 2 For areas where greater slip resistance is required, use products with DCOF CLASS 2
- 3 Manufactured by ALFAGRES S.A In Colombia.
- 4 First quality
- 5 Surface Unglazed
- 6 Mr. consumer, please carefully check the identification of the material, the batch and the production date found on the physical product packaging.
- 7 Consult the installation and maintenance manual for its correct use.
- 8 Specification according to ISO 13006 - NTC 919 (Colombian Technical Standard)