




EARTH

DELIGHT YOUR SENSES WITH THE EARTH COLLECTION'S UNIQUE COMBINATION OF SOPHISTICATED YET RUSTIC SEMI-MATTE CRACKLE GLAZE.

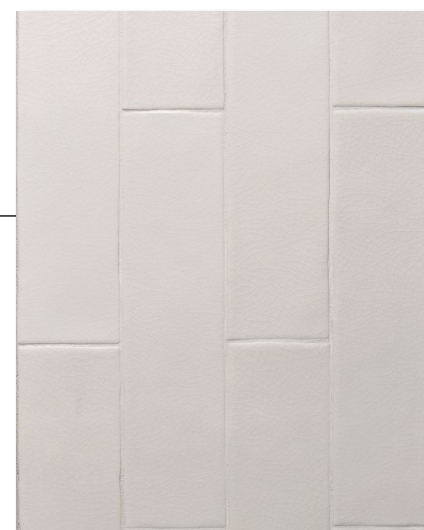

MATTE CRACKLE



The hand-molded surface and the options of a smooth, textured or raised pattern surface add to its uniqueness and appeal. Beautiful 6"x6" dimensional inserts and the finishing touches from crown moldings to baseboards allow each installation to be detailed and tailored to fit the most impeccable taste. Design options abound and you will be thrilled with its aesthetic and functional contribution to bathrooms, showers, kitchens and more.


EARTH Matte Crackle



Find out the product code simply by putting together the color and the item

Example: **ADEW 836**

SEMI-MATTE FINISH



NAVAJO WHITE **ADEW**



FAWN **ADEF**



ASH GRAY **ADEG**



MORNING SKY **ADEM**

FIELD TILES

UNDULATED



836 3"x6"



831 3"x12"


TEXTURED




836T 3"x6" Textured



831T 3"x12" Textured



101 3"x6" Waves



102 3"x12" Waves

TRIMS

FINISHING EDGES



FE



FE Corner


506 FE 0.5"x6"

512 FE 0.6"x12"


500 FE Corner 6"

501 FE Corner 12"


DECORATIVE ACCESSORIES



502 6"x6" Energy Deco




503 6"x6" Cosmos Deco



206 1"x6" Bar Liner



207 1"x12" Bar Liner




204 1"x6" Quarter Round




205 Beak

FINISHING TOUCHES



200 2.4"x6" Molding



201 2.4"x12" Molding




202




203



809 5.1"x6" Base Board
(Glazed Top Edge)

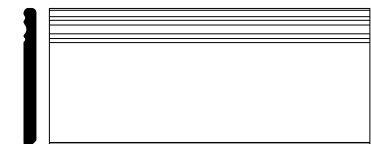

810 5.1"x12" Base Board
(Glazed Top Edge)



899

END CAPS

FRAME CORNERS

NAVAJO WHITE **ADEW**



ASH GRAY **ADEG**



Photo by: @redoakremodeling

FAWN **ADEF**



Photo by: Beechen & Dill Homes

MORNING SKY **ADEM**





| FIELD TILES | | |
|--|--------------------------------|----------------|
| SIZE | SIZE SPECIFICATIONS | THICKNESS* |
| UNDULATED TILE | | |
| 3"x6" | 2.953"x5.905" (75mm x 150mm) | 0.366" (9.3mm) |
| 3"x12" | 2.953"x11.811" (75mm x 300mm) | 0.366" (9.3mm) |
| TEXTURED TILE | | |
| 3"x6" Textured | 2.953"x5.905" (75mm x 150mm) | 0.366" (9.3mm) |
| 3"x12" Textured | 2.953"x11.811" (75mm x 300mm) | 0.366" (9.3mm) |
| 3"x6" Waves | 2.953"x5.905" (75mm x 150mm) | 0.366" (9.3mm) |
| 3"x12" Waves | 2.953"x11.811" (75mm x 300mm) | 0.366" (9.3mm) |
| DECORATIVE ACCESSORIES & FINISHING TOUCHES | | |
| Bar Liner 1"x6" | 0.984"x5.905" (25mm x 150mm) | 0.669" (17mm) |
| Bar Liner 1"x12" | 0.984"x11.771" (25mm x 299mm) | 0.669" (17mm) |
| Quarter Round 1"x6" | 0.905"x5.827" (23mm x 148mm) | 0.394" (10mm) |
| Molding 2.4"x6" | 2.401"x5.827" (61mm x 148mm) | 1.102" (28mm) |
| Molding 2.4"x12" | 2.401"x11.771" (61mm x 299mm) | 1.102" (28mm) |
| Base Board (Glazed Top Edge) 5.1"x6" | 5.157"x5.827" (131mm x 148mm) | 0.512" (13mm) |
| Base Board (Glazed Top Edge) 5.1"x12" | 5.118"x11.811" (130mm x 300mm) | 0.512" (13mm) |

*Thickness is understood as the highest point of the tile.

| APPLICATIONS | | |
|---|------------------------|---------------------|
| | SUITABLE RESIDENTIAL | SUITABLE COMMERCIAL |
| Bathroom Walls** | YES | YES |
| Shower Walls** | YES | YES |
| Kitchen Walls** | YES | YES |
| Countertops | NO | NO |
| Fireplace Surrounds** | YES | YES |
| Outdoor Cooking / Bar Spaces (Non Freeze-Thaw Climates)** | YES | YES |
| Pool Waterlines / Water Fountains | NO | NO |
| Floors | NO | NO |
| | TEST METHOD ASTM / ISO | RESULT |
| Water Absorption | C-373 / 10545-3 | Pass |
| Breaking Strength | C-648 / 10545-4 | Pass |
| Stain Resistance*** | C-1378 / 10545-14 | Resistant |
| Chemical Resistance | C-650 / 10545-13 | Non Resistant |
| Facial Dimensions | C-499 / 10545-2 | Pass |
| Range of Thickness | C-499 / 10545-2 | Pass |
| Warpage | C-485 / 10545-2 | Pass |

| INSTALLATION | |
|----------------------------|-------------------------|
| GROUT JOINT RECOMMENDATION | SHADE VARIATION |
| 3/8" | V1 - Uniform Appearance |

| CLEANING RECOMMENDATIONS |
|---|
| Routine with a non-abrasive/non-acidic, mild and PH neutral cleaner |
| SEALING GUIDELINES |
| Solvent based penetrating sealer suitable for ceramic tiles |

| CHARACTERISTICS | |
|-----------------|------------------------------|
| Glaze | Crackle with subtle movement |
| Surface Sheen | Semi-Matte |
| Texture | Slightly Undulated |

**Crackle tiles must be properly sealed. (See SEALING instructions in INSTALLATION & MAINTENANCE guidelines).
*** In order to accomplish this test, the tile must be properly sealed.

Due to the nature of our tile, a certain amount of variation in color, shading, surface and texture are to be expected.



CONTACT US

Corporate Headquarters
South East Distribution Center
9450 N.W.12th St.
Miami, FL. 33172
Office: 305-513-4633
Fax: 305-513-4634
customerservice@adexusa.com

West Coast Distribution Center
1745 N. St. Thomas Cir.
Orange, CA 92865
Office: 714-773-0197
Fax: 714-773-9352
customerservicewest@adexusa.com

North East Distribution Center
1000 Wall St. W.
Lyndhurst, NJ. 07071
Office: 201-355-8772
Fax: 201-636-2802
customerservicene@adexusa.com

www.adexusa.com

