LEGEND

ACC DENOTES A FIRE ALARM INTERFACE AND CONTAINMENT SHALL BE PROVIDED TO EACH ACCESS CONTROL DOOR.

THE CONTRACTOR SHALL ALLOW FOR THE SUPPLY AND INSTALLATION OF ALL CONTAINMENT AND FIRE ALARM INTERFACES TO EACH ACCESS CONTROL DOOR. THE CONTRACTOR SHALL LIAISE WITH THE SECURITY CONTRACTOR REGARDING FINAL LOCATION OF CONDUIT DROPS AND LOCATIONS OF BREAKGLASSES, SWIPE CARDS AND PUSH TO EXITS PRIOR TO INSTALLATION. NO SURFACE RUN CONDUIT SHALL BE ACCEPTED.

THE CONTRACTOR SHALL NOTE THAT THE LANDLORDS 'SPECIALIST FIRE ALARM CONTRACTOR SHALL CARRY OUT ALL FIRE ALARM WORKS INCLUDING THE SUPPLY AND INSTALLATION OF CABLING, INTERFACE UNITS, TESTING AND COMMISSIONING. ALL WORKS SHALL INCLUDE ALL COSTS ASSOCIATED WITH SHUTDOWNS OF THE LANDLORDS SYSTEM AND OUT OF HOURS WORKS AS REQUIRED.

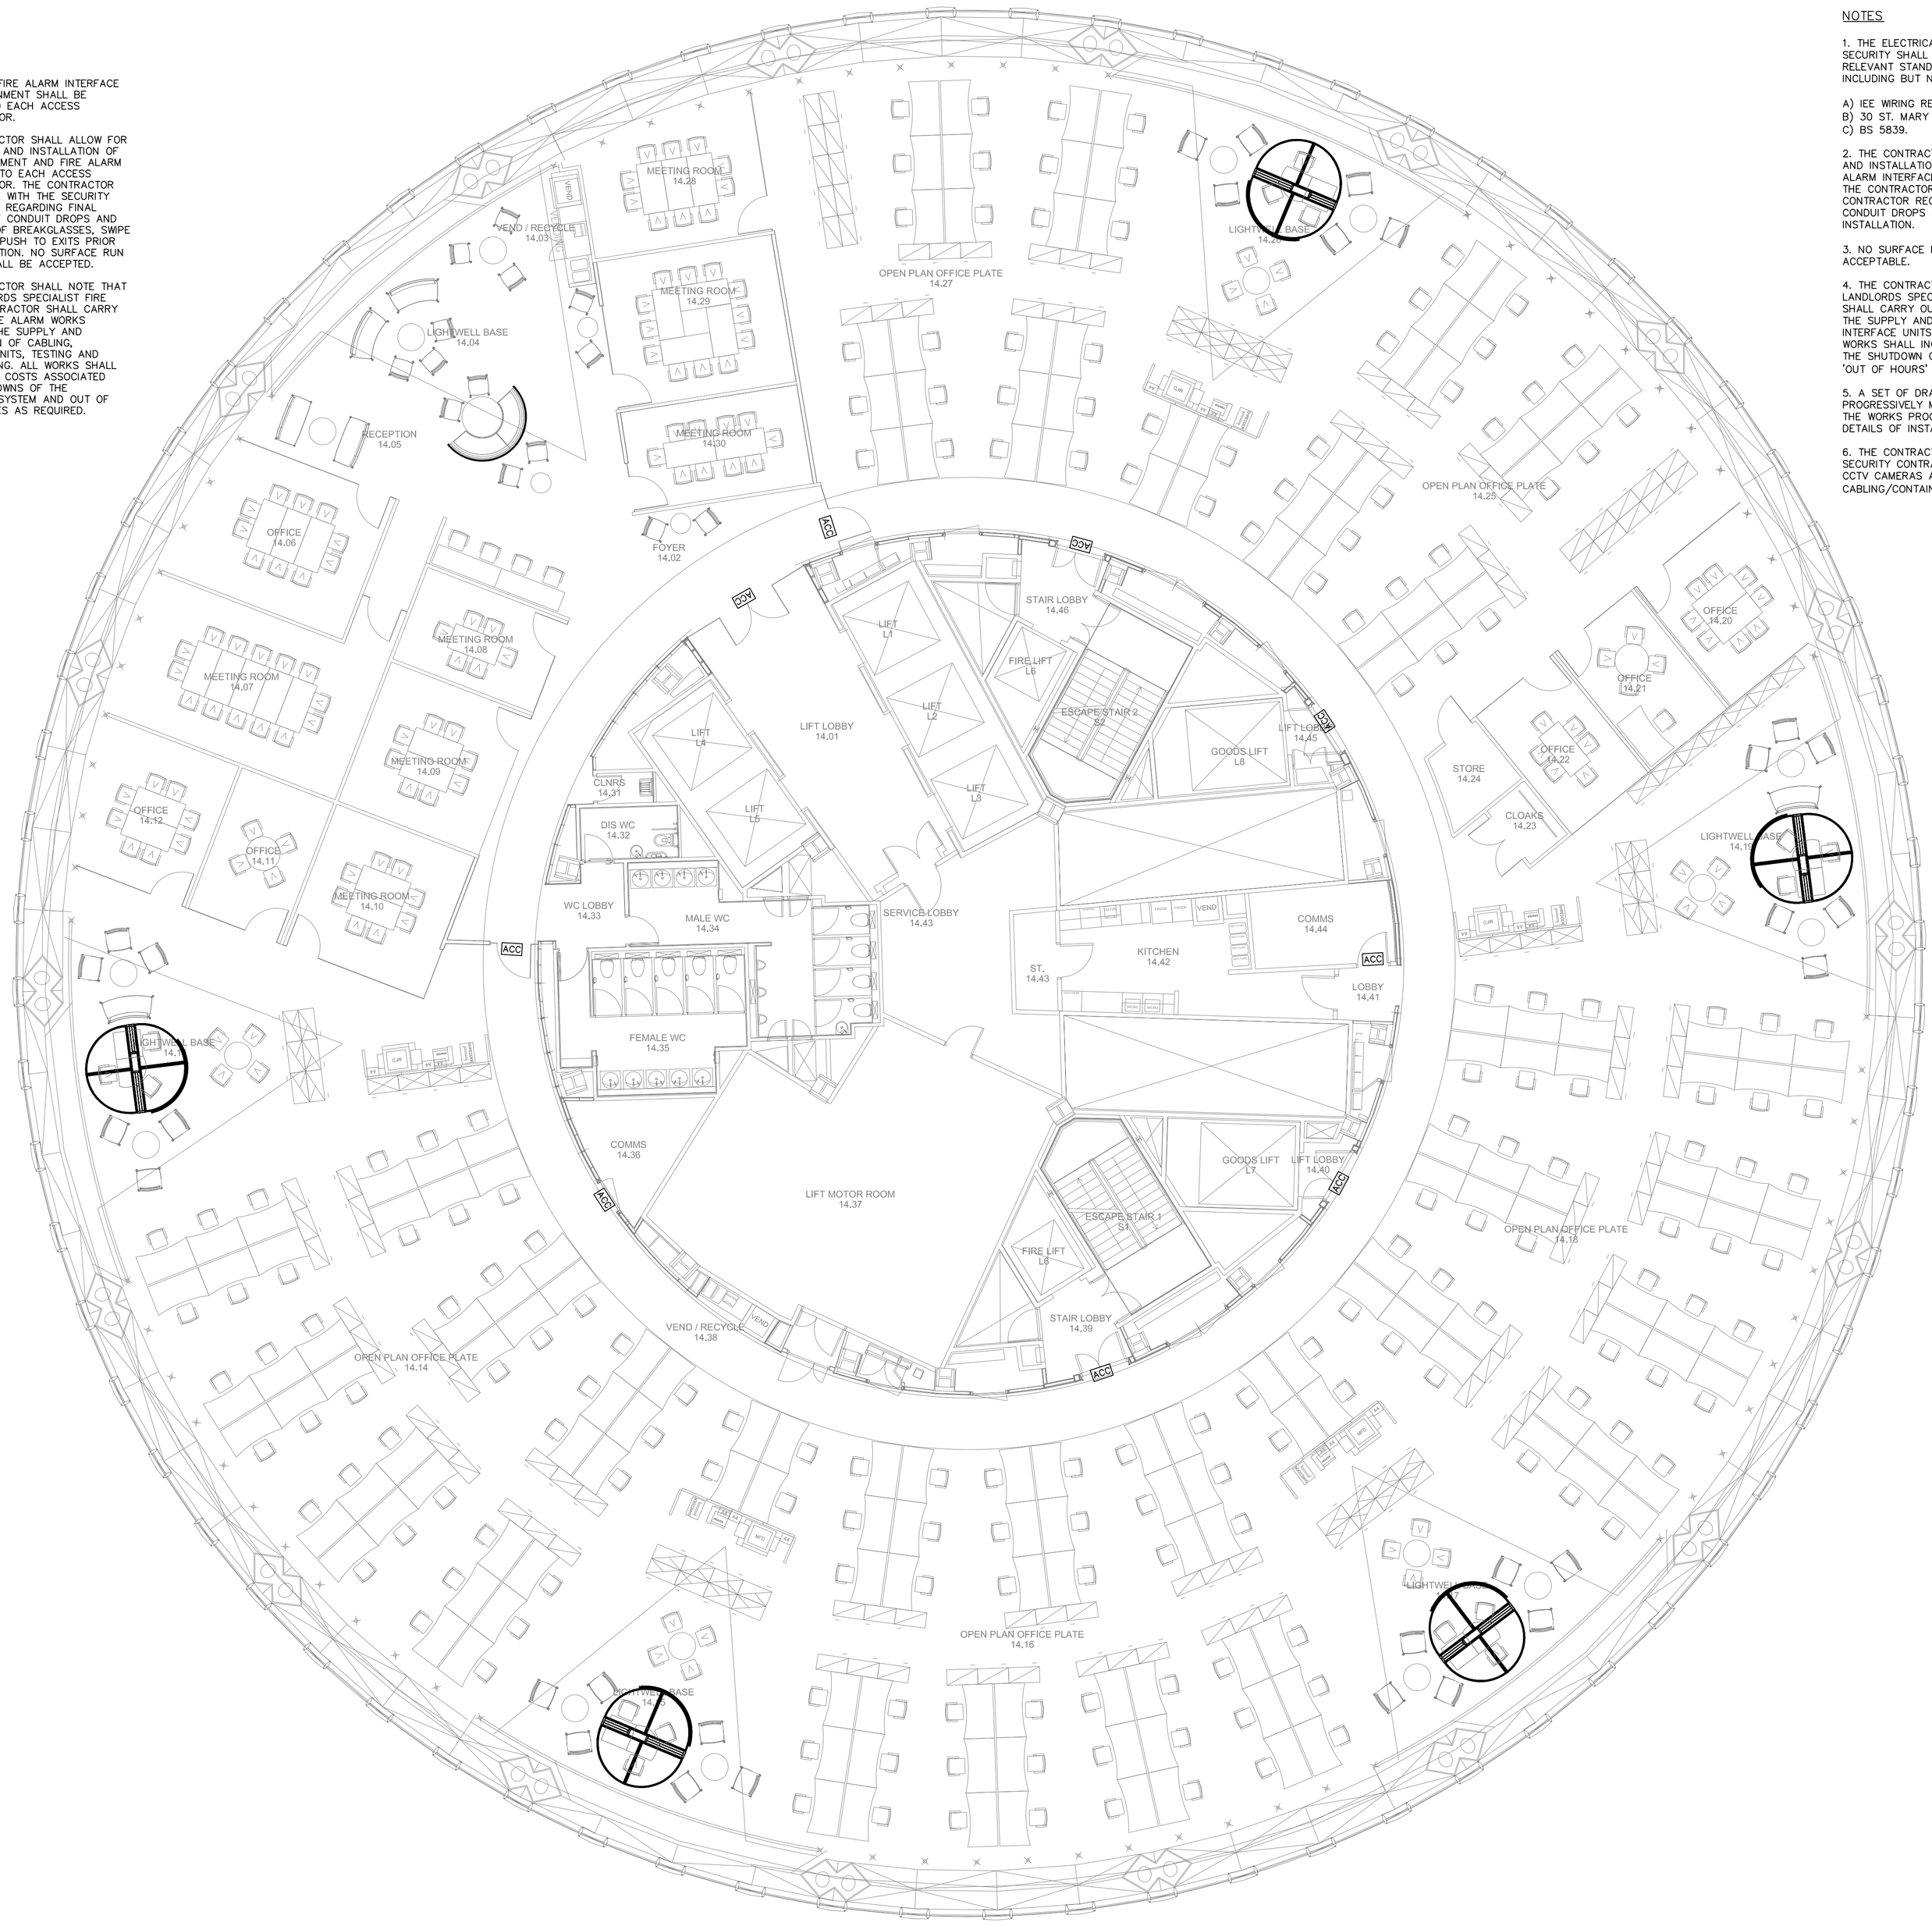

NOTES

1. THE ELECTRICAL WORKS FOR THE FIRE AND SECURITY SHALL BE IN ACCORDANCE WITH THE RELEVANT STANDARDS AND THEIR AMENDMENTS INCLUDING BUT NOT LIMITED TO THE FOLLOWING –

A) IEE WIRING REGULATIONS (BS 7671: 2008)
B) 30 ST. MARY AXE FIT OUT GUIDE.
C) BS 5839.

2. THE CONTRACTOR SHALL ALLOW FOR THE SUPPLY AND INSTALLATION OF ALL CONTAINMENT AND FIRE ALARM INTERFACES TO EACH ACCESS CONTROL DOOR. THE CONTRACTOR SHALL LIASE WITH THE SECURITY CONTRACTOR REGARDING FINAL LOCATIONS OF CONDUIT DROPS AND INTERFACES PRIOR TO INSTALLATION.

3. NO SURFACE RUN CONDUIT/CABLING SHALL BE ACCEPTABLE.

4. THE CONTRACTOR SHALL NOTE THAT THE LANDLORDS SPECIALIST FIRE ALARM CONTRACTOR SHALL CARRY OUT ALL FIRE ALARM WORKS INCLUDING THE SUPPLY AND INSTALLATION OF ALL CABLING, INTERFACE UNITS, TESTING AND COMMISSIONING. ALL WORKS SHALL INCLUDE ALL COSTS ASSOCIATED WITH THE SHUTDOWN OF THE LANDLORD SYSTEMS AND 'OUT OF HOURS' WORK AS REQUIRED.

5. A SET OF DRAWINGS SHALL BE KEPT ON SITE AND PROGRESSIVELY MARKED UP BY THE CONTRACTOR AS THE WORKS PROCEEDS TO RECORD LOCATIONS AND DETAILS OF INSTALLED SERVICES.

6. THE CONTRACTOR SHALL LIAISE WITH THE SECURITY CONTRACTOR FOR FINAL LOCATIONS OF CCTV CAMERAS AND ALL ASSOCIATED CABLING/CONTAINMENT.

Rev	Date	Details/Issue	Rev By
A	18/10/10	PROPOSED DRAWING.	SR

Customer Approval:

SIGNED _____

PRINT _____ DATE _____

PREMISES CROSS CHECK _____ DATE _____

I.S. APPROVAL _____ DATE _____

STANDARD LIFE

STANDARD LIFE ASSURANCE LIMITED
30 LOTHIAN ROAD, EDINBURGH, EH1 2DH
TELEPHONE 0131 245 2500 FAX 0131 245 2520

ALL DIMENSIONS SHOULD BE CHECKED ON SITE
DO NOT SCALE. © STANDARD LIFE ASSURANCE Co. 2000

Consultants:

ACTS PARTNERSHIP LTD
15 WOODSIDE CRESCENT
GLASGOW
G3 7UL
TEL. 0141 331 6300

DDATTE

STANDARD LIFE ASSURANCE LIMITED
PREMISES DEPARTMENT
DUNDAS HOUSE, 20 BRANDON STREET,
EDINBURGH EH3 5PP 0131 245 2500
premises_dept@standardlife.com

HELPDESK NUMBER

DRAWING STATUS: PROPOSED

REASON FOR ISSUE: APPROVAL

Project:
STANDARD LIFE WEALTH,
30 ST. MARY AXE, LONDON EC3A 8BF

Title:
FIRE AND SECURITY LAYOUT
LEVEL 14

Drawn by: NEIL CURRIE Date: 07/10/10

Scale: 1:100 Sheet Size: A1

Path: C015

Dwg.No: A13968014 Rev: A