
## PS40 BRACKET & WALL BOX 21





# **PS4021**PS40 BRACKET & WALL BOX 21

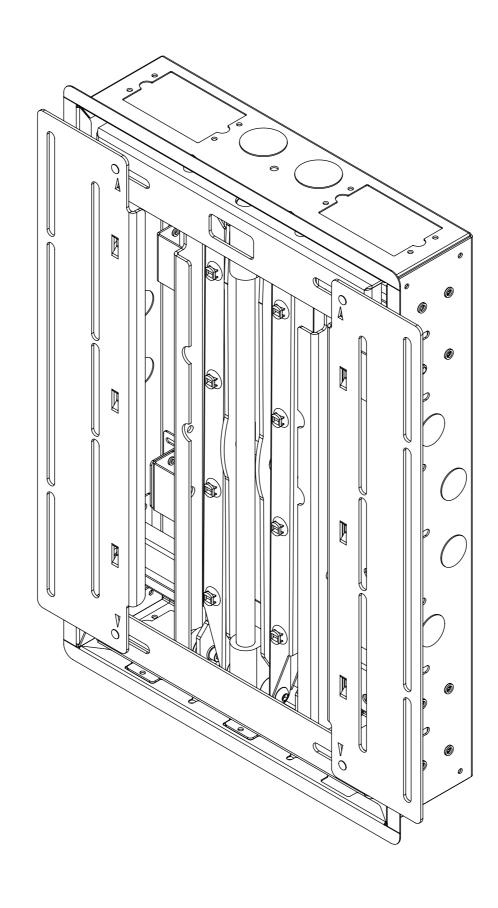

| SPECIFICATION                   | MEASUREMENTS   |
|---------------------------------|--|
| Screen Sizes                    | 40" - 75"  |
| Maximum Weight Capacity         | 60Kg (132lb)   |
| Maximum Extension From Wall     | 381mm (15")  |
| Maximum Depth From Wall         | 35mm (1.4")  |
| Wall Bracket Lateral Adjustment | 89mm (3.5")  |
| Packaging Dimensions            | 425 x 600 x 185cm (16.73 x 23.62 x 7.28")  |
| Shipping Weight                 | 18.5kg (41lbs)   |
| Maximum Rotation                | 50 - Bi-directional with 43" screen - 38 with 55" - 32 with 65" - 27 with 75"  |
| Movement Type                   | Manual   |
|                                 |  |
| Mounting Patterns Supported     | VESA 400, 300, 200, 100 W x 400, 300, 200, 100 H   |
| Product Options / Features      | Specific B&O and Loewe mounts / adapters, Custom RAL paint finishes  |
| Package Contents                | 1 x PS40 Bracket, 1 x Stud Rail Kit, 1 x Bolt & Fixing Pack, 1 x Pack of Cable Ties, 1 x WB21 In Wall Box, 3 x Pairs of Clamp Brackets, 2 x PS Bracket Mount Rails, 2 x Horizontal Trim Strips, 2 x Vertical Trim Strips |
| Marine Suitable                 | No   |


## PS40 BRACKET & WALL BOX 21


# future automation

### **DIMENSIONS**

#### Contents include:

- 1 x PS40 Bracket
- 1 x WB21 Wall box
- 3 x Pairs of clamp brackets
- 2 x PS bracket mount rails
- 2 x Horizontal trim strips
- 2 x Vertical trim strips
- 1 x WattBox mount bracket set

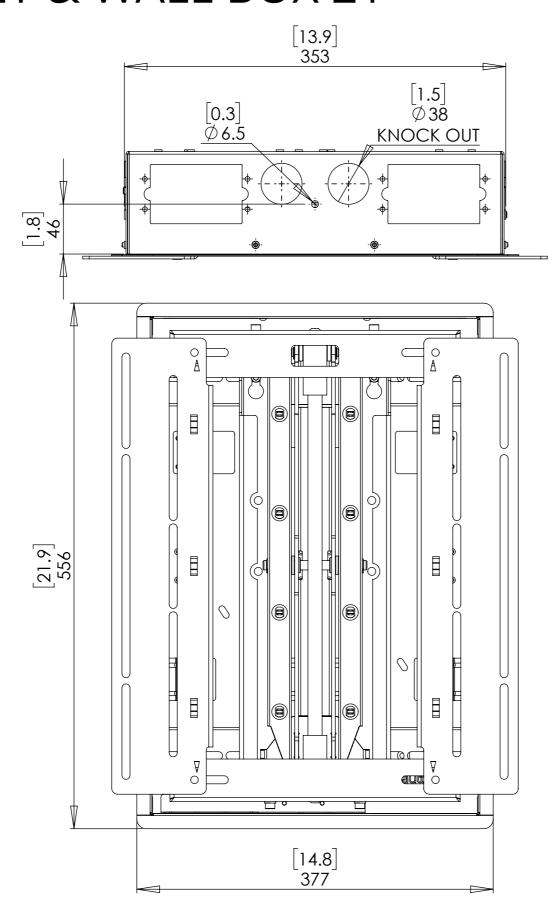

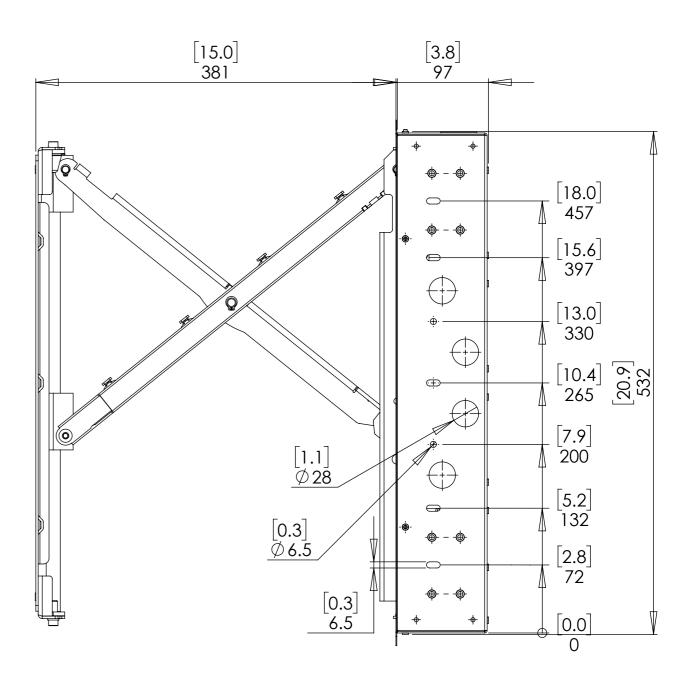


SHEET 3


### PS40 BRACKET & WALL BOX 21

#### PS BRACKET INSTALLATION FEATURES

#### **DEPTH ADJUSTMENT**

The bracket mount rail has two fixing positions that allow the space behind the PS bracket to be increased or decreased as desired to accommodate accessories.

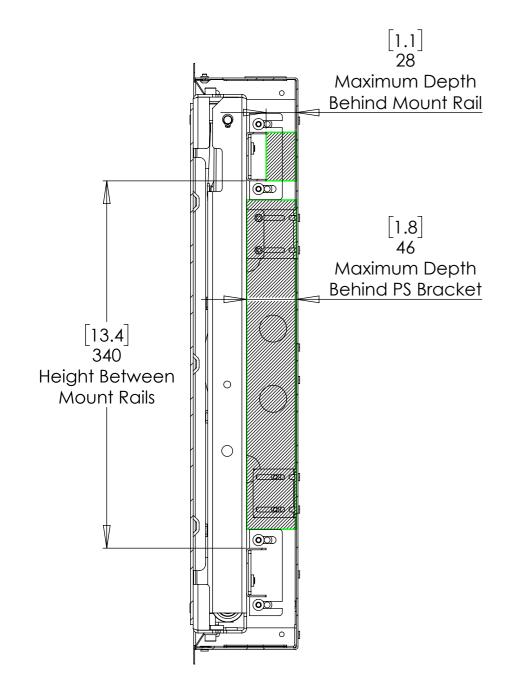


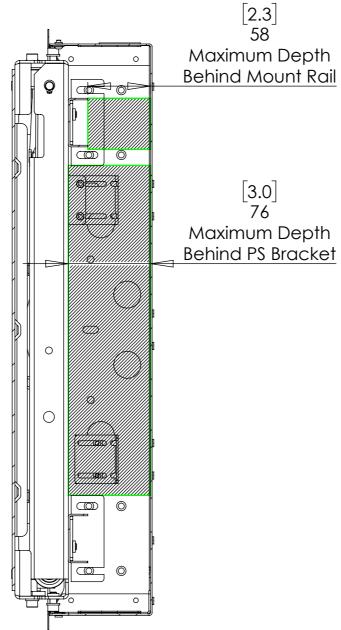

# future automation

#### LATERAL ADJUSTMENT

The bracket mount rail has slots on the front face to allow the PS bracket to shift laterally so that its location relative to the studs can be fine tuned.

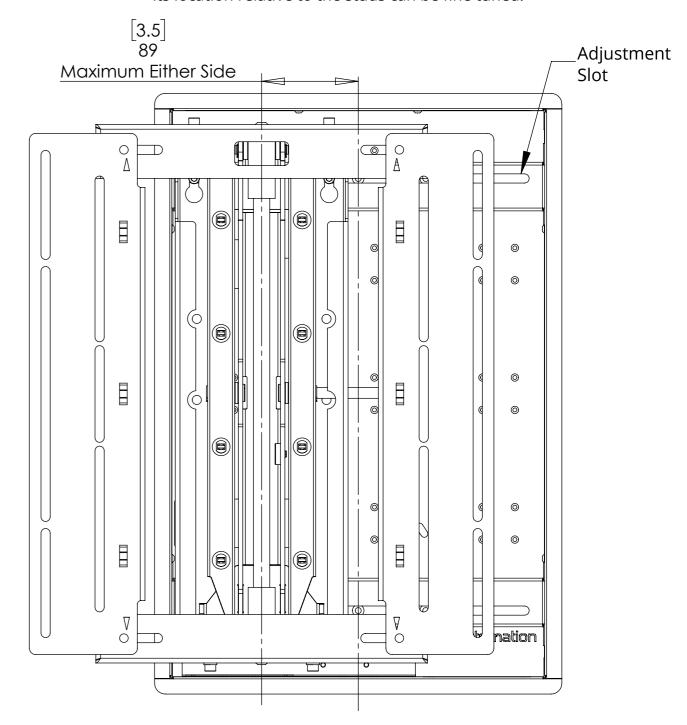

SHEET 4

## PS40 BRACKET & WALL BOX 21

# fa future automation

### PS40 BRACKET MOUNTING

The PS40 has one central mounting position within the WB21 wall box.

