



MAINS VOLTAGE LED STAIRLIGHTS

PLEASE READ THESE INSTRUCTIONS CAREFULLY BEFORE INSTALLATION
LEAVE A COPY FOR THE USER / MAINTENANCE ENGINEER FOR FUTURE REFERENCE

IMPORTANT INSTALLATION INFORMATION

- Installation should be carried out in accordance with the latest edition of the National Wiring Regulations. If in doubt, consult a qualified electrician.
- Maximum Voltage – 240V 50Hz AC.
- Ensure that ALL electrical connections are tight with no loose strands.
- These luminaires are for indoor use only.
- Before commencing installation or maintenance, ensure electricity is switched off at the mains to avoid electrocution.


IMPORTANT USER INFORMATION

- There are no user serviceable parts in this luminaire.
- This luminaire is not dimmable.

INSTALLATION INSTRUCTIONS

1. Select the required position for the LED Stairlight. Beware of joists, water pipes and electric cables.
2. Install the 1 gang 45mm depth back box (not supplied). Depending on the manufacturer of the back box, you may have to bend the top & bottom screw lugs flat to allow the luminaire to fit.
3. Connect the mains supply cable(s) to the terminal block (See Fig.1). Ensure that there are no exposed conductors or trapped insulation.
4. This luminaire **MUST** be earthed. Attach the earth lead to the circuit earth conductor using an approved terminal block.
5. Screw the LED stair light into the back box ensuring that cables are not trapped.
6. Insert screw hole covers.
7. Switch on the power supply.

Fig. 1

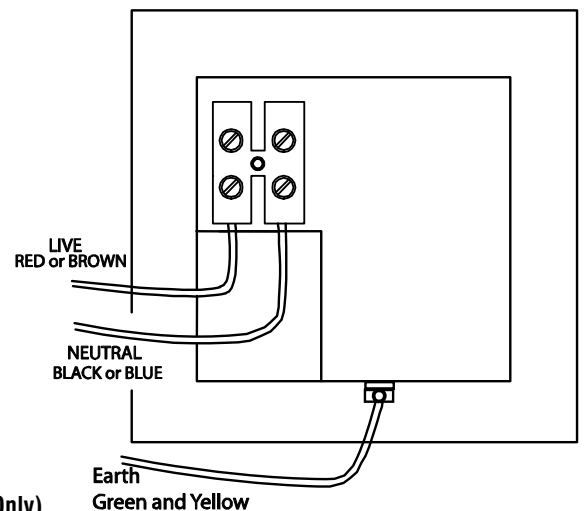

Environmental Protection (W.E.E.E.) – Aurora's WEEE Reg.No. WEE/BG0130YX(UK Only)



Waste Electrical & Electronic Equipment Regulations (WEEE) requires that any of our products showing this marking (left) must not be disposed of with other household or commercial waste. Aurora does not levy any WEEE disposal charges to its customers for affected WEEE related products. To prevent possible harm to the environment or human health from uncontrolled waste disposal, please separate any such product from other waste types and recycle it responsibly at your local facilities. Check with your Local Authority, Recycling Centre or retailer for recycling advice. If, when you purchased any Aurora product, your supplier included a WEEE disposal fee, you should then contact your supplier for advice on his takeback of the product for the correct disposal.

WARRANTY

See www.auroralighting.com for full details of guarantees and Extended Warranty Terms and Conditions. The warranty is invalid in the case of improper use, tampering, and removal of the Q.C. date label, installation in an improper working environment or installation not according to the current edition of the National Wiring Regulations. Should this product fail during the warranty period it will be replaced free of charge, this is subject to correct installation and return of the faulty product. Aurora does not accept responsibility for any installation costs associated with the replacement of this product. This warranty is in addition to the statutory rights in your country of purchase. Aurora reserves the right to alter specifications without prior notice.



ENCASTRE MURAL LED SUR SECTEUR

VEUILLEZ LIRE ATTENTIVEMENT CES INSTRUCTIONS AVANT L'INSTALLATION

CONSERVEZ UNE COPIE DE CES INSTRUCTIONS POUR L'UTILISATEUR OU LE TECHNICIEN DE MAINTENANCE POUR TOUTE CONSULTATION ULTÉRIEURE


INFORMATION IMPORTANTE CONCERNANT L'INSTALLATION

- Cette installation doit être effectuée en conformité avec la dernière édition du Règlement national de câblage. L'installation ou la modification de ce luminaire ne doit être confiée qu'à des électriciens qualifiés.
- Tension maximale - 240V 50 Hz AC.
- Veillez à ce que TOUTES les connexions électriques soient bien serrées, sans fils lâches.
- Ces luminaires sont destinés à l'éclairage intérieur uniquement.
- Avant de commencer l'installation ou l'entretien, vérifiez que l'alimentation est coupée au secteur pour éviter une électrocution.

INFORMATION IMPORTANTE POUR L'UTILISATEUR

- Ce luminaire ne comporte aucune pièce réparable par l'utilisateur.
- Ce luminaire n'est pas gradable.

Fig. 1

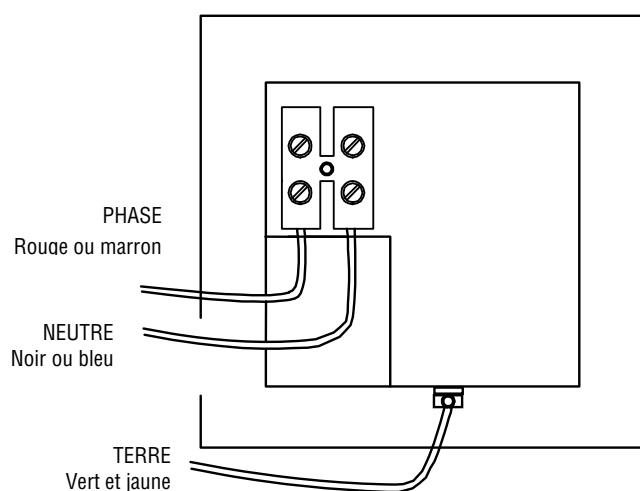

NOTICE D'INSTALLATION

1. Choisissez la position de l'encastrement mural LED. Faites attention aux solives, aux conduites d'eau et aux câbles électriques.
2. Installez la boîte d'encastrement carrée simple de 45 mm de profondeur (non fourni). Selon le fabricant de la boîte, vous pourriez avoir à plier à plat les pattes supérieures et inférieures, pour permettre de poser le luminaire.
3. Reliez les câbles secteur au bornier (voir Fig. 1). Vérifiez qu'il n'y a pas de conducteurs exposés ni d'éléments d'isolation coincés.
4. Ce luminaire DOIT être mis à la terre. Fixez le fil de terre au conducteur de terre du circuit à l'aide d'un bornier approuvé.
5. Vissez l'encastrement mural LED dans la boîte d'encastrement, en veillant à ce que les câbles ne soient pas coincés.
6. Insérez les capots sur les trous de vis.
7. Mettez sous tension.

Protection de l'environnement (D.E.E.E.) – N° d'inscription DEEE d'Aurora en Grande-Bretagne WEE/BG0130YX (Royaume-Uni uniquement)



Les Règlements relatifs aux déchets d'équipements électriques et électroniques (DEEE) exigent que nos produits portant ce marquage (à gauche) ne soient pas jetés avec d'autres ordures ménagères ou déchets commerciaux. Afin de prévenir tout risque pour l'environnement ou la santé publique, veuillez ne pas jeter ce type de produits avec les autres déchets et le recycler de manière responsable auprès de vos installations locales. Veuillez vous rapprocher des autorités compétentes, des centres de recyclage ou de votre distributeur pour des conseils concernant le recyclage de ces produits.

GARANTIE

Voir www.auroralighting.com pour plus de détails sur les garanties et les conditions d'extension de garantie. La garantie n'est pas valable dans le cas d'une mauvaise utilisation, d'une mauvaise manipulation, de l'élimination de l'étiquette de traçabilité avec la date, de l'installation dans un environnement de travail inapproprié ou de l'installation ne suivant pas le règlement national en vigueur. Si ce produit a une défaillance durant la période de garantie, il sera remplacé gratuitement, cela est sujet à une installation correcte et le retour du produit défectueux. Aurora n'accepte aucune responsabilité pour tous les coûts d'installation liés au remplacement de ce produit. Cette garantie s'ajoute aux droits légaux dans votre pays d'achat. Aurora se réserve le droit de modifier les spécifications sans préavis.