

**DRAPER**

**EN**

Original Instructions  
Version 3  
May 2026

230V 900W 150MM

# DUAL ACTION POLISHER

01817



UK CA CE

**These are the original product instructions. Read the instruction manual in full and retain for future reference.**

Please visit [drapertools.com/manuals](http://drapertools.com/manuals) for the latest version of this manual and the associated parts list, if applicable.

## 1.1 Product Reference

**User Manual for:** 230V 900W 150MM  
Dual Action Polisher

**Stock No:** 01817

**Part No:** DA900SF

## 1.2 Revisions

**Version 1:** February 2018  
First release

**Version 2:** November 2022

**Version 3:** May 2026

## 1.3 Understanding the Safety Content of This Manual



**WARNING!** – Situations or actions that may result in personal injury or death.



**CAUTION!** – Situations or actions that may result in damage to the product or surroundings.

**Important:** – Information or instructions of particular importance.

## 1.4 Copyright © Notice

Copyright © Draper Tools Limited.

Permission is granted to reproduce this manual for personal and educational use **ONLY**. Commercial copying, redistribution, hiring or lending is strictly prohibited.

No part of this manual may be stored in a retrieval system or transmitted in any other form or means without written permission from Draper Tools Limited.

In all cases, this copyright notice must remain intact.

1. Preface	2
2. Contents	2
3. Product Introduction	3
3.1 Intended Use	3
3.2 Specification	3
4. Health and Safety Information	3-6
4.1 General Health and Safety Precautions	3
4.2 Additional Safety Warnings for Polishers	5
4.3 Connection to the Power Supply	6
4.4 Residual Risk	6
5. Identification and Unpacking	7
5.1 Product Overview	7
5.2 Packaging	7
6. Preparing the Polisher	8
6.1 Fitting & Adjusting the Handle	8
6.2 Fitting and Removing the Backing Pad	8
7. Operating Instructions	9
7.1 ON/OFF Switch Operation	9
7.2 Variable Speed control	9
8. Maintenance and Troubleshooting	10
8.1 General Maintenance	10
8.2 Replacing the Motor Brush Assembly	10
8.3 Troubleshooting	10
9. Spares, Returns and Disposal	10
10. Warranty	10
11. Explanation of Symbols	11

## 3. Product Introduction

### 3.1 Intended Use

This handheld polisher is designed to polish paintwork on vehicles using polishing sponges and mops.

Any other application beyond the conditions established for use will be considered misuse. Draper Tools accepts no responsibility for improper use of this product.

This product is intended for domestic and infrequent light-duty trade use.

Read this manual in full before attempting to assemble, operate or maintain the product, and retain it for later use.

### 3.2 Specification

<b>Stock No.</b>	<b>01817</b>
<b>Part No.</b>	<b>DA900SF</b>
Rated voltage	230V/50Hz
Rated input	900W
Pad diameter (orbit diameter)	150mm (9mm)
Speed (no load)	2,000 - 6,400rpm
Noise emissions	
Sound pressure level	84.3dB (A)
Sound power level	95.3dB (A)
Uncertainty (K)	95.3dB (A)
Vibrations	8.09m/s <sup>2</sup>
Uncertainty (K)	1.5m/s <sup>2</sup>
Cord length (approx.)	5M
Net weight	2.4kg

**Important:** The declared noise emission values and vibration total values have been measured in accordance with a standard test method and may be used for comparing one tool with another. These values may also be used in a preliminary assessment of exposure.



**WARNING!** The noise emissions and vibration during actual use of the product can differ from the declared values depending on the type of work and the area upon which it is used. Before each use, estimate the likely exposure resulting from the actual conditions of use. Take into account all parts of the operation cycle in order to identify any safety measures required to protect the operator.

## 4. Health and Safety Information

### 4.1 General Health and Safety Precautions



**WARNING!** Read all safety warnings, instructions, illustrations and specifications provided with this power tool. Failure to follow all instructions listed below may result in electric shock, fire and/or serious injury.

Save all warnings and instructions for future reference.

The term 'power tool' in the warnings refers to your mains-operated (corded) power tool or battery-operated (cordless) power tool.

#### Work Area Safety

- **Keep work area clean and well lit.**
  - Cluttered or dark areas invite accidents.
- **DO NOT operate power tools in explosive atmospheres, such as in the presence of flammable liquids, gases or dust.**
  - Power tools create sparks which may ignite the dust or fumes.
- **Keep children and bystanders away while operating a power tool.**
  - Distractions can cause you to lose control.

#### Electrical Safety

- **Power tool plugs must match the outlet. NEVER modify the plug in any way. DO NOT use any adapter plugs with earthed (grounded) power tools.**
  - Unmodified plugs and matching outlets will reduce the risk of electric shock.
- **Avoid body contact with earthed or grounded surfaces, such as pipes, radiators, ranges and refrigerators.**
  - There is an increased risk of electric shock if your body is earthed or grounded.
- **DO NOT expose power tools to rain or wet conditions.**
  - Water entering a power tool will increase the risk of electric shock.
- **DO NOT abuse the cord. NEVER use the cord for carrying, pulling or unplugging the power tool. Keep cord away from heat, oil, sharp edges or moving parts.**
  - Damaged or entangled cords increase the risk of electric shock.

- **When operating a power tool outdoors, use an extension cord suitable for outdoor use.**
  - Use of a cord suitable for outdoor use reduces the risk of electric shock.
- **If operating a power tool in a damp location is unavoidable, use a residual current device (RCD) protected supply.**
  - Use of an RCD reduces the risk of electric shock.

### Personal Safety

- **Stay alert, watch what you are doing and use common sense when operating a power tool. DO NOT use a power tool while you are tired or under the influence of drugs, alcohol or medication.**
  - A moment of inattention while operating power tools may result in serious personal injury.
- **Use personal protective equipment. Always wear eye protection.**
  - Using appropriate protective equipment, such as a dust mask, non-skid safety shoes, hard hat or hearing protection, will reduce personal injuries.
- **Prevent unintentional starting. Ensure the switch is in the off position before connecting to a power source and/or battery pack, picking up or carrying the tool.**
  - Carrying power tools with your finger on the switch or energising power tools that have the switch on invites accidents.
- **Remove any adjusting key or wrench before turning the power tool on.**
  - A wrench or a key left attached to a rotating part of the power tool may result in personal injury.
- **DO NOT overreach. Keep proper footing and balance at all times.**
  - This enables better control of the power tool in unexpected situations.
- **Dress properly. DO NOT wear loose clothing or jewellery. Keep your hair and clothing away from moving parts.**
  - Loose clothes, jewellery or long hair can be caught in moving parts.
- **If devices are provided for the connection of dust extraction and collection facilities, ensure these are connected and properly used.**
  - Use of dust collection can reduce dust-related hazards.

- **DO NOT let familiarity gained from frequent use of tools allow you to become complacent and ignore tool safety principles.**
  - A careless action can cause severe injury within a fraction of a second.

### Power Tool Use and Care

- **DO NOT force the power tool. Use the correct power tool for your application.**
  - The correct power tool will do the job better and safer at the rate for which it was designed.
- **DO NOT use the power tool if the switch does not turn it on and off.**
  - Any power tool that cannot be controlled with the switch is dangerous and must be repaired.
- **Disconnect the plug from the power source and/or remove the battery pack, if detachable, from the power tool before making any adjustments, changing accessories or storing power tools.**
  - Such preventive safety measures reduce the risk of starting the power tool accidentally.
- **Store idle power tools out of the reach of children and do not allow anyone unfamiliar with the power tool or these instructions to operate the power tool.**
  - Power tools are dangerous in the hands of untrained users.
- **Maintain power tools and accessories. Check for misalignment or binding of moving parts, breakage of parts and any other condition that may affect the power tool's operation. If damaged, have the power tool repaired before use.**
  - Many accidents are caused by poorly maintained power tools.
- **Keep cutting tools sharp and clean.**
  - Properly maintained cutting tools with sharp cutting edges are less likely to bind and are easier to control.
- **Use the power tool, accessories and tool bits, etc., in accordance with these instructions, taking into account the working conditions and the work to be performed.**
  - Use of the power tool for operations different from those intended could result in a hazardous situation.
- **Keep handles and grasping surfaces dry, clean and free from oil and grease.**
  - Slippery handles and grasping surfaces do not allow for safe handling and control of the tool in unexpected situations.

## Service

- **Have your power tool serviced by a qualified repair person using only identical replacements parts.**
  - This will ensure that the safety of the power tool is maintained.

## 4.2 Additional Safety Warnings for Polishers

- **This power tool is intended to function as a polisher. Read all safety warnings, instructions, illustrations and specifications provided with this power tool.**
  - Failure to follow all instructions listed below may result in electric shock, fire and /or serious injury.
- **Operations such as grinding, sanding, wire brushing or cutting-off are not recommended to be performed with this power tool.**
  - Operations for which the power tool was not designed may create a hazard and cause personal injury.
- **DO NOT use accessories which are not specifically designed and recommended by Draper Tools.**
  - Just because the accessory can be attached to your power tool, it does not assure safe operation.
- **The rated speed of the accessory must be at least equal to the maximum speed marked on the power tool.**
  - Accessories running faster than their rated speed can break and fly apart.
- **The outside diameter and the thickness of your accessory must be within the capacity rating of your power tool.**
  - Incorrectly sized accessories cannot be adequately guarded or controlled
- **Do not use a damaged accessory. Before each use inspect the accessory such as backing pads for cracks, tear or excess wear. If power tool or accessory is dropped, inspect for damage or install an undamaged accessory. After inspecting and installing an accessory, position yourself and bystanders away from the plane of the rotating accessory and run the power tool at maximum no-load speed for one minute.**
  - Damaged accessories will normally break apart during this test time.
- **Wear personal protective equipment. Depending on application, use face shield, safety goggles or safety glasses. As appropriate, wear dust mask, hearing protectors, gloves and workshop apron capable of stopping small abrasive or workpiece fragments.**
  - The eye protection must be capable of stopping flying debris generated by various operations. The dust mask or respirator must be capable of filtering particles generated by your operation. Prolonged exposure to high intensity noise may cause hearing loss.
- **Keep bystanders a safe distance away from work area. Anyone entering the work area must wear personal protective equipment.**
  - Fragments of workpiece or of a broken accessory may fly away and cause injury beyond immediate area of operation.
- **Position the cord clear of the spinning accessory.**
  - If you lose control, the cord may be cut or snagged, and your hand may be pulled into the spinning accessory.
- **NEVER lay the power tool down until the accessory has come to a complete stop.**
  - The spinning accessory may grab the surface and pull the power tool out of your control.
- **DO NOT run the power tool while carrying it at your side.**
  - Accidental contact with the spinning accessory could snag your clothing, pulling the accessory into your body.
- **Regularly clean the power tool's air vents.**
  - The motor's fan will draw the dust inside the housing and excessive accumulation of powdered metal may cause electrical hazards
- **DO NOT operate the power tool near flammable materials.**
  - Sparks could ignite these materials.
- **DO NOT use accessories that require liquid coolants. Using water or other liquid coolants may result in electrocution or shock.**

## Further safety instructions for all operations

- Kickback is a sudden reaction to a pinched or snagged rotating backing pad, or any other accessory. Pinching or snagging causes rapid stalling of the rotating accessory which in turn causes the uncontrolled power tool to be forced in the direction opposite of the accessory's rotation at the point of binding.

For example, if an abrasive wheel is snagged or pinched by the workpiece, the edge of the wheel that is entering into the pinch point can dig into the surface of the material causing the wheel to climb out or kick out. The wheel may either jump toward or away from the operator, depending on direction of the wheel's movement at the point of pinching. Abrasive wheels may also break under these conditions

- **Kickback is the result of power tool misuse and/or incorrect operating procedures or conditions and can be avoided by taking proper precautions as given below:**
- **Maintain a firm grip on the power tool and position your body and arm to allow you to resist kickback forces. Always use auxiliary handle, if provided for maximum control over kickback or torque reaction during start up.**
  - The operator can control kickback forces, if proper precautions are taken.
- **NEVER place your hand near the rotating accessory.**
  - Accessory may kickback over your hand.
- **DO NOT position your body in the area where power tool will move if kickback occurs.**
  - Kickback will propel the tool in direction opposite to the wheel's movement at the point of snagging.
- **Use special care when working corners, sharp edges etc. Avoid bouncing and snagging the accessory.**
  - Corners, sharp edges or bouncing have a tendency to snag the rotating accessory and cause loss of control or kickback.
- **DO NOT allow any loose portion of the polishing bonnet or its attachment strings to spin freely. Tuck away or trim any loose attachment strings.**
  - Loose and spinning attachment strings can entangle your fingers or snag on the workpiece.

## 4.3 Connection to the Power Supply



**CAUTION! Risk of electric shock. DO NOT open.**

This appliance is supplied with an approved plug and cord for your safety.

If the power supply cord is damaged, it must be replaced by Draper Tools, an authorised service agent or similarly qualified personnel in order to avoid a hazard.

The damaged or incomplete plug, when cut from the cord, must be disabled to prevent connection to a live electrical outlet.

This appliance is Class II† and is designed for connection to a power supply matching that detailed on the rating label and compatible with the plug fitted.


The value of the fuse fitted is marked on the pin face of the plug. Should the fuse need replacing, ensure the substitute is of the correct rating, approved to BS 1362 and ASTA or BS Kite marked. This should only be performed by suitably qualified personnel.

ASTA 

BSI 

If an extension lead is required, use an approved and compatible lead rated for this appliance.

**Important: ALWAYS** follow the extension lead instructions regarding maximum load while the cable is wound. If in doubt, unwind the entire cable. A coiled extension lead generates heat which could melt the lead and cause a fire.

†Double insulated : This product requires no earth connection as supplementary insulation is applied to the basic insulation to protect against electric shock in the event of failure of the basic insulation.

## 4.4 Residual Risk

The safety instructions in this manual cannot account for all possible conditions and situations that may occur. Exercise common sense and caution when using this product and protect against any additional conceivable risks.

# 5. Identification and Unpacking

Carefully remove the product from the packaging and examine it for any signs of damage that may have occurred during shipment. If any part is damaged or missing, do not attempt to use the product.

Please contact the Draper Helpline; contact details can be found at the back of this manual.

## 5.1 Product Overview



- |  |   |
|--|---|
| 1. Adjustable handle                         | 6. Variable speed control                             |
| 2. <b>ON/OFF</b> switch                      | 7. Cord and plug                                      |
| 3. Motor unit                                | 8. 2 x Brush compartment (2 x Spare brushes supplied) |
| 4. Hook & loop backing pad (supplied fitted) | 9. Hex key  |
| 5. Polishing sponge                          | 10. Spanner   |

## 5.2 Packaging

Keep the product packaging for the duration of the warranty period for reference should the product need to be returned for repair.

**WARNING!** Keep packaging materials out of reach of children. Dispose of packaging correctly and responsibly and in accordance with local regulations.

Please visit [drapertools.com](http://drapertools.com) for our full range of accessories and consumables.

# 6. Preparing the Polisher

## 6.1 Fitting & Adjusting the Handle

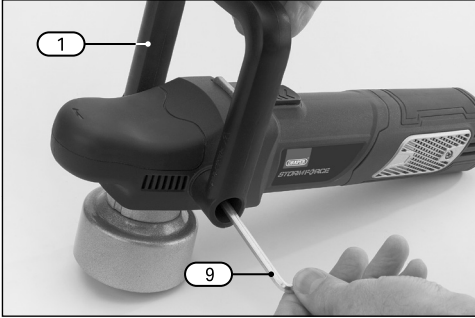


Fig. 1

1. Remove the two hex bolts fitted to the mount points on the polisher. Attach the adjustable handle (1).
2. Select the best orientation and most comfortable position to suit the required application.
3. Then tighten the hex bolts through each side of the handle using the hex key (9) supplied.

## 6.2 Fitting and Removing the Backing Pad

**Note:** The backing pad (4) comes pre-fitted.

### To remove the Backing Pad

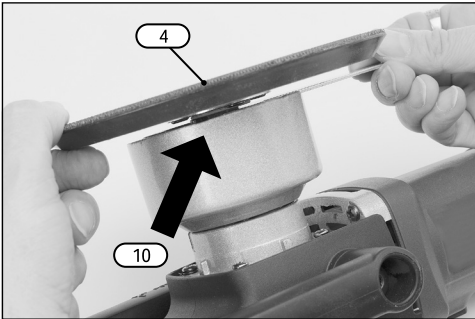


Fig. 2

- Use the spanner supplied (10) to firmly hold the nut that attaches the backing pad (4) to the polisher shaft.
- Turn the backing pad anticlockwise by hand to remove from the shaft.

### To Fit the Backing Pad & Polishing Sponge

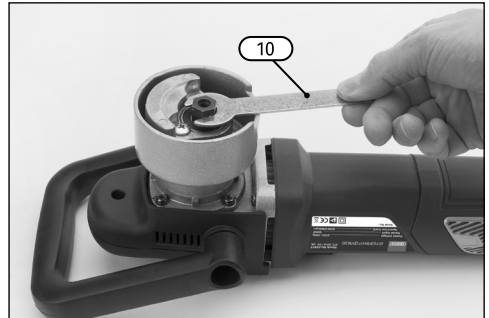


Fig. 3

- Use the spanner supplied (10) to hold the nut that attaches the backing pad (4) to the polisher shaft.
- Turn the backing pad clockwise by hand to secure to the shaft. Ensure that the distance ring is fitted before attaching the backing pad.



Fig. 4

- Align the required polishing sponge (5) with the backing pad. Push down to secure in place.

**Important:** Before operating this product, read and understand all the safety instructions listed in this manual. Ensure that the product is fully assembled and correctly prepared for use.

## 7.1 ON/OFF Switch Operation

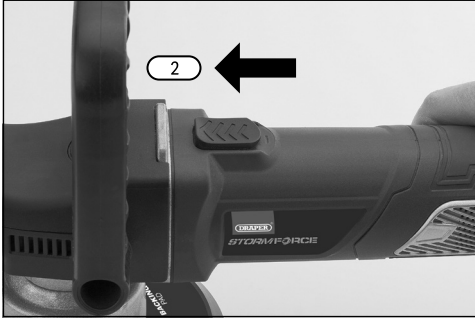


Fig. 5

- To turn on the polisher, push the **ON/OFF** switch (2) to lock in the 'ON' position.



Fig. 6

- To turn the polisher off, push down on the back of the switch to release.

## 7.2 Variable Speed control



Fig. 7

- The polisher has six speed setting. Set the speed control (6) according to application required.
- Refer to the table below for recommended speeds.

Setting	Speed (rpm) (approx.)	Application
1	2,000	Waxing & buffering
2	3,000	Waxing & buffering
3	3,500	Polishing & cleaning
4	4,500	Polishing & cleaning
5	5,500	Remove paint defects & oxidation
6	6,400	Remove paint defects & oxidation

### Important:

- **DO NOT** use excessive pressure as this will increase wear of the internal parts and can damage the polisher.
- Test on a small, inconspicuous area before applying to the vehicle surface.

**Important: ALWAYS** unplug the tool from the power supply before carrying out any cleaning, servicing or maintenance.

If the power supply cord is damaged, it must be replaced by Draper Tools, an authorised service agent or similarly qualified personnel in order to avoid a hazard.

## 8.1 General Maintenance

- Regular inspection and cleaning will reduce the necessity for maintenance operations and will keep your tool in good working condition.
- All maintenance, servicing and repairs should be carried out by a qualified technician using recommended replacement parts.
- Periodically clear the air vents using dry compressed air. Wear safety glasses when using compressed air.
- Clean the plastic parts with a soft damp cloth. **DO NOT** use abrasives or solvents to clean this product.
- Wash the bonnets by hand with a mild soap and water. Allow to dry before reusing.
- When not in use, store in a safe, dry and childproof location.

## 8.2 Replacing the Motor Brush Assembly

1 x Spare set of brush assemblies supplied.



Fig. 9

- Unscrew the covers (8) on both sides to access the brush assemblies.
- Replace both at the same time and replace the cover securely.

## 8.3 Troubleshooting

Problem	Possible Cause	Remedy
Motor does not start.	Fuse blown in plug.	Check and replace fuse if required.
	Brushes worn.	Replace the brushes – 1 x spare set supplied.
	Other issues.	Contact Draper Tools for support.
Polisher vibrates.	Backing pad or foam pad damaged or out of balance.	Replace backing pad.

## 9. Spares, Returns and Disposal

For spare parts, servicing, and repair and replacement options, please contact the Draper Tools Product Helpline for details of your nearest authorised agent.

Draper Tools will endeavour to hold any spare parts, if applicable, for seven years from the date that it sells the final matching stock item.

Any servicing or repairs carried out by unauthorised personnel or installation of spare parts not supplied by Draper Tools will invalidate your warranty.

At the end of its working life, dispose of the product responsibly and in line with local regulations. Recycle where possible.

- **DO NOT** dispose of this product with domestic waste; most local authorities provide appropriate recycling facilities.



## 10. Warranty

24 months from date of purchase

Visit [drapertools.com/warranty](http://drapertools.com/warranty) for more information.

However, if the tools are hired out, the warranty period is reduced to 90 days from the date of purchase.

# 10. Explanation of Symbols



Read the instruction manual



Wear face mask and safety glasses



Wear ear defenders



Wear protective clothing



Class II construction  
(Double insulated)



Rated voltage



Rated input



pad diameter



Orbit diameter



Speed (no load)



WEEE-

Waste Electrical & Electronic Equipment

Do not dispose of Waste Electrical & Electronic Equipment  
in with domestic rubbish



European conformity



UK Conformity Assessed

## Contact Details

### **Draper Tools**

Draper Tools Limited  
Hursley Road  
Chandler's Ford  
Eastleigh  
Hampshire  
SO53 1YF  
UK

**Website:** [drapertools.com](http://drapertools.com)

**Email:** [sales@drapertools.com](mailto:sales@drapertools.com)

**Product Helpline:** +44 (0) 23 8049 4344

**Telephone Sales Desk:** +44 (0) 23 8049 4333

**General Enquiries:** +44 (0) 23 8026 6355

### **Draper Tools Europe B.V.**

Oude Graaf 8  
6002 NL  
Weert  
Netherlands

Please contact the Draper Tools Product Helpline for repair and servicing enquiries.