

LED Linear Luminaire - Horizontal Suspension

24V - Ø40mm - IP20 - 300° Illumination

tagra®

SKU: 4040TL



24V

300°

IP20

3YR
Warranty

Key Features

- Available in 500mm, 1000mm, 1500mm, 2000mm, 2500mm & 3000mm
- Available in 3000K, 4000K & 6000K
- Ø40mm Diameter
- 300° Illumination
- Horizontal Suspension
- IP20 Rating
- 3 Year Warranty

Electrical Data

Voltage	Max. Current	Typ. Current	Max. Power	Typ. Wattage
24V	0.9A/m	0.83A/m	22W/m	20W/m

Photometric Data

LED Chip	Beam Angle	CRI	LEDs/m	SDCM	Dimmable
2835	300°	>80	280 LEDs	<3	Yes


Colour Temperature	CCT/Wavelength	Lumens/m	Length	Light Length	Length	Light Length
Warm White	3000K	2600lm	500mm	488mm	2500mm	2488mm
Neutral White	4000K	2700lm	1000mm	988mm	3000mm	2988mm
Cool White	6000K	2550lm	1500mm	1488mm		
			2000mm	1988mm		

Mechanical Data

IP Rating	Cable Length	Cable	Cable Gauge	Cable Material
IP20	3000mm	Hard Wired	20 AWG	PVC
Diffuser	Size	Installation	Operating Temperature	
-	40x40mm	Suspend	-5°C ~ +40°C	
Lifespan	Energy Rating	Warranty	End Caps	Weight
60,000 hrs	D	3 Years	Black	-

Wire Colours	
RED	V+ DC
BLACK	Ground GND

Dimensions

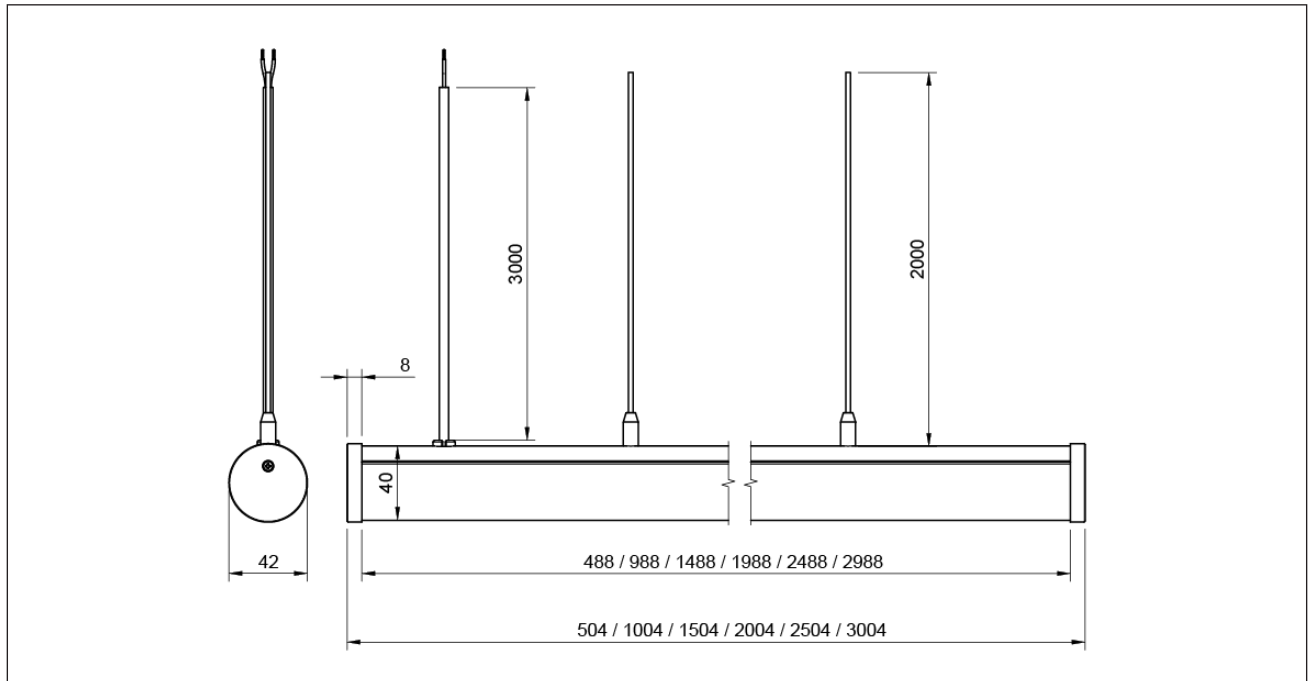

Available SKUs

SKU	CCT	Colour	Length
4040TL-0.5M-3K	3000K	Warm White	488mm
4040TL-0.5M-4K	4000K	Neutral White	488mm
4040TL-0.5M-6K	6000K	Cool White	488mm
4040TL-1M-3K	3000K	Warm White	988mm
4040TL-1M-4K	4000K	Neutral White	988mm
4040TL-1M-6K	6000K	Cool White	988mm
4040TL-1.5M-3K	3000K	Warm White	1488mm
4040TL-1.5M-4K	4000K	Neutral White	1488mm
4040TL-1.5M-6K	6000K	Cool White	1488mm
4040TL-2M-3K	3000K	Warm White	1988mm
4040TL-2M-4K	4000K	Neutral White	1988mm
4040TL-2M-6K	6000K	Cool White	1988mm
4040TL-2.5M-3K	3000K	Warm White	2488mm
4040TL-2.5M-4K	4000K	Neutral White	2488mm
4040TL-2.5M-6K	6000K	Cool White	2488mm
4040TL-3M-3K	3000K	Warm White	2988mm
4040TL-3M-4K	4000K	Neutral White	2988mm
4040TL-3M-6K	6000K	Cool White	2988mm