

שעוני פיקוד מכניים שבועיים

להתקנה על פס דין, למתח עבודה 16A/230V 50/60 Hz

מק"ט	תיאור המוצר	מגעים	סוללות גיבוי	רוחב מודול	זמן מיתוג	דגם
108024	שבועי + מפסק 1-Auto	מגע פתוח	100 שעות	1	2 שעות	ELO-W
108025	שבועי ורטיקלי + מפסק 1-0-2	מגע מחליף	100 שעות	2	2 שעות	BIO-W
108026	שבועי + מפסק 1-0-2 + מחוגים	מגע מחליף	200 שעות	2	3 שעות ו-30 דקות	DUET-W
108027	שבועי + מפסק 1-0-2 + מחוגים	מגע מחליף	200 שעות	3	2 שעות	ARVO-W
108017	יומי שבועי + מפסק 1-0-2 + מחוגים. 2 תצוגות - שבועית ויומית	מגע מחליף	200 שעות	5	15 דקות ושעתיים	AIKO-DW

■ תקנים: CE, IEC, CEE, UL ■ הערות: סוללת גיבוי מסוג ליטיום (Lithium) ■ מנגון קוורץ



108024



108025



108026



108027



108017

א.ר. אסקו יבוא ושיווק בע"מ

יבוא ושיווק חומרי חשמל לתעשייה | טל. 072-2114114 | פקס. 03-9641744 | WhatsApp. 054-4433230

שד' גן רווה 1, א.ת. צפוני יבנה, ת.ד. 13078 מיקוד 8122202


Electromechanical time switches

BIO

DIMENSIONS (mm)


CONNECTION DIAGRAM

Electromechanical time switch with trippers for household use.

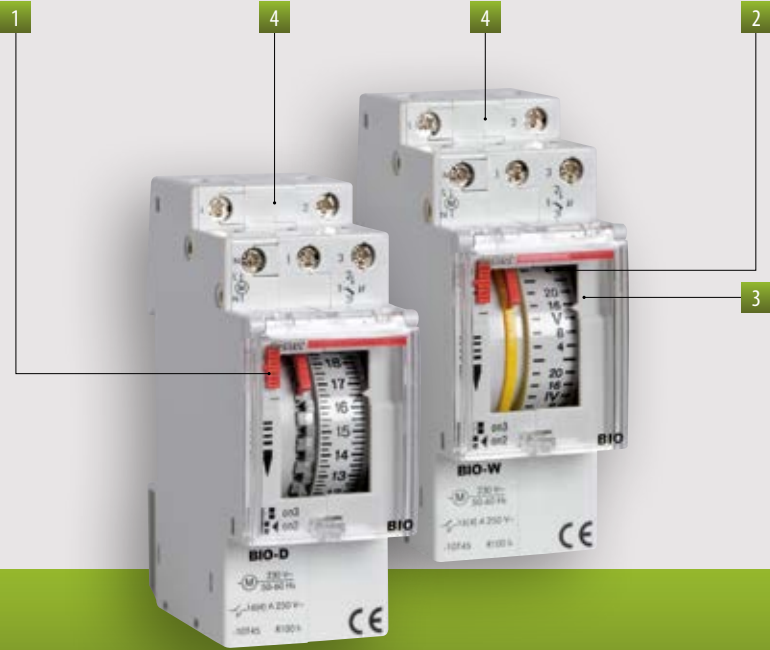


- 1 Manual selector
- 2 Quadrant
- 3 Time index
- 4 Container: 2 DIN modules


Front view

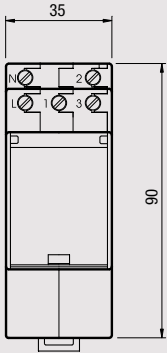

Side view

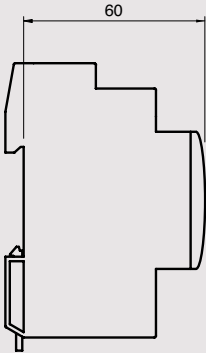

Diagram



TIME AND MANAGEMENT

DAILY/WEEKLY TIME SWITCHES

- Daily, weekly programming
- Power supply 230 V 45/60 Hz
- Fastening on DIN rail



TECHNICAL INFORMATION

GENERAL CHARACTERISTICS

Power supply	V AC	230 (- 15% ÷ +10%)
Frequency	Hz	50 / 60
Absorption	W	0.5
Output		Relay with change-over contact 16 (4) A / 250 V AC
Mechanism		Stepping motor with quartz crystal oscillator

Charge reserve	100 h after charging uninterrupted of 48 h
Operating precision	± 1 second a day at 22°C
Operating temperature	°C -10 ÷ +50
Insulation	Class II
Degree of protection	IP 20

	BIO-D	BIO-W
Quadrant	1 of 24 hours	1 of 7 days
No of trippers	96	84
Minimum intervention time	15 min	2 hours

Code	Model	Description	Quadrant	N° trippers
VE087300	BIO-D	Daily mechanical time switch	24 h	96
VE088100	BIO-W	Weekly mechanical time switch	7 days	84

REFERENCE STANDARDS

Compliance with Community Directives: 2014/35/EU (LVD) • 2014/30/EU (EMCD) is declared with reference to the following Harmonized Standards: EN 60669-2-3 • EN 61000-6-1 • EN 61000-6-3