



Electric
Heating System

Warmup®

The world's **best-selling** floor heating brand™



DCM-PR

The fastest to install
heated decoupling system

DCM-PRO - the fastest to install heated decoupling system

INTRODUCTION

The DCM-PRO is the fastest way to install a heated decoupling system in all areas; infact 40% faster than standard underfloor heating membranes.

The patent pending self-adhesive underside of the DCM-PRO Mat acts as a self-healing decoupling layer and eliminates the need for an adhesive layer, significantly reducing both time and costs.

The pre-spaced channels on the mat also reduce time spent on measuring and calculating the correct spacing to output ratio for your project as they are made to correspond directly with the cable sizes.

To facilitate installation even further, the DCM-PRO Cable is designed to be highly flexible, providing durability and maximum reliability and comes with a lifetime warranty when installed with the DCM-PRO Mat. As market-leaders in underfloor heating we can promise our premium quality product is guaranteed for the lifetime of your floor.



Electric
Heating System

- ↔ INSTALLS IN MINUTES
WITHOUT TILE ADHESIVE
- ↔ INSTANT LAYING
- ↔ SELF-HEALING
- ↔ WATERPROOF

DCM-PRO

FEATURES

- **Self-healing decoupling layer**
- **Patent pending self-adhesive backing**
- **Functional with all UFH-compatible floor coverings**
- **Membrane designed to correlate with cable sizes**
- **Waterproof - tape required**

BENEFITS


- **40% faster installation**
- **Easy to pour in self-leveller with no air pockets**
- **Protects floor from damage**
- **Easy to tile over**
- **Convenient sizing - easy to order**

The DCM-PRO's castellations are designed to protect the heating wire from the tiler's trowel, allowing for easy, safe and rapid tiling straight on top of the membrane. For protection of a pre-tiled floor, or when using carpet, laminate, engineered wood or vinyl, the open layout of the castellations allow for easy pouring and even spread of self-levelling compound, without the worry of any holes or air gaps.

PROTECTS FLOOR FROM DAMAGE

Rated as high performance, the DCM-PRO is proven to protect tiled floors from cracking; as tested according to ANSI 118.12.5.4 (American National Standards Institute, www.ansi.org).

Unlike traditional fabric-based decoupling layers which tear upon movement, the patent pending self-healing decoupling layer contracts and expands to deal with seasonal changes, preventing damage occurring from gaps and cracks in the subfloor.

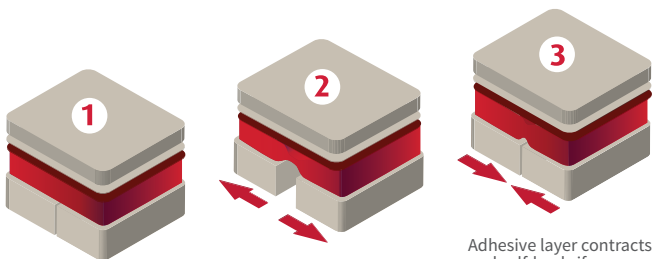

Protects floor surface from damage caused by subfloor movement.

Patent pending adhesive layer slides and stretches with expansion.

Adhesive layer contracts and self-heals if gap shrinks due to seasonal changes (typical for wood subfloors).

DCM-PRO

INSTALLS IN MINUTES

The self-adhesive backing attaches directly to subfloor; no need to mix additional tile adhesive or wait for it to dry.



Installation video for Warmup® DCM-PRO
Always refer to the installation manual prior to commencing your project.

CONVENIENT SIZING

- 1m² of cable fits exactly 1m² of membrane at the recommended 90mm spacing
- Can be adjusted to increase or decrease coverage and power:

230 Watts per m² - based on **2 castellations**

190 Watts per m² - based on alternate **2 or 3 castellations**


150 Watts per m² - based on **3 castellations** (*recommended*)

130 Watts per m² - based on alternate **3 or 4 castellations**

115 Watts per m² - based on **4 castellations**

USE WITH ALL FLOOR TYPES

The DCM-PRO Mat can be covered with self-levelling compound, allowing it to heat and protect any floor covering material that is certified for use with underfloor heating. This includes tiles, engineered wood, vinyl and carpet.

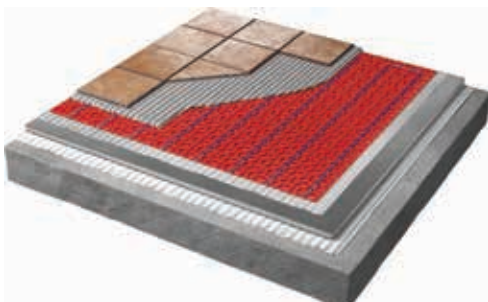

-sizing chart & price guide

The DCM-PRO Mat and Cable are sold separately.

DCM-PRO MAT PRICE GUIDE

PRODUCT CODE	Format	Length (m)	Width (m)	Area Covered (m ²)	Price Excl. 20% VAT
DCM-M-1	Sheets	1	1	1	£16.66
DCM-M-15	Rolls	15	1	15	£249.99

DCM-PRO CABLE PRICE GUIDE

Output	230W/m ²	~190W/m ²	150W/m ²	~130W/m ²	115W/m ²	
Spacing	60mm	60/90mm	90mm*	90/120mm	120mm	
Castellations	2	2/3	3	3/4	4	
PRODUCT CODE	Area Covered (m ²)	Area Covered (m ²)	Area Covered (m ²)	Area Covered (m ²)	Area Covered (m ²)	Price Excl. 20% VAT
DCM-C-1	0.7	0.8	1.0	1.2	1.3	£95.83
DCM-C-1.5	1.0	1.3	1.5	1.8	2.0	£104.17
DCM-C-2	1.3	1.7	2.0	2.3	2.7	£125.00
DCM-C-2.5	1.7	2.1	2.5	2.9	3.3	£141.67
DCM-C-3	2.0	2.5	3.0	3.5	4.0	£158.23
DCM-C-3.5	2.3	2.9	3.5	4.1	4.7	£179.17
DCM-C-4	2.7	3.3	4.0	4.7	5.3	£200.00
DCM-C-4.5	3.0	3.8	4.5	5.3	6.0	£220.83
DCM-C-5	3.3	4.2	5.0	5.8	6.7	£250.00
DCM-C-6	4.0	5.0	6.0	7.0	8.0	£275.00
DCM-C-7	4.7	5.8	7.0	8.2	9.3	£308.33
DCM-C-8	5.3	6.7	8.0	9.3	10.7	£341.67
DCM-C-9	6.0	7.5	9.0	10.5	12.0	£383.33
DCM-C-10	6.7	8.3	10.0	11.7	13.3	£429.17
DCM-C-12	8.0	10.0	12.0	14.0	16.0	£483.33
DCM-C-14	9.3	11.7	14.0	16.3	18.7	£550.00
DCM-C-16	10.7	13.3	16.0	18.7	21.3	£625.00

DCM-PRO ACCESSORIES PRICE GUIDE

PRODUCT CODE	Description	Length (varies)	Height (mm)	Width (mm)	Thickness (mm)	Price Excl 20% VAT
DCM-E-25	Perimeter Strip	25m	30	-	10	£20.83
DCM-T-10	Waterproofing Tape	10m	120	-	1	£25.00
DCM-R-I	Internal Corner	120mm	60	120	1	£5.42
DCM-R-E	External Corner	120mm	60	120	1	£5.42



*Please visit warmup.co.uk for more information.

Warmup®

The world's **best-selling** floor heating brand™

THE WARMUP DIFFERENCE

- 1 BEAB APPROVED SAFETY MARK 
- 2 COSTS LESS THAN 13P PER DAY TO HEAT AN AVERAGE BATHROOM*
- 3 THE ORIGINAL LIFETIME WARRANTY AND SAFETYNET™ INSTALLATION GUARANTEE
- 4 NATIONWIDE NETWORK OF ENGINEERS AND 24/7/365 HELPLINE
- 5 WARMUP 4iE® SMART WIFI THERMOSTAT, 3iE ENERGY-MONITOR AND TEMPO THERMOSTATS

The WARMUP word and associated logos are trade marks.

© Warmup Plc. 2016 – Regd. TM Nos. 1257724, 4409934, 4409926, 5265707. E & OE.

Warmup Plc
702 & 704 Tudor Estate
Abbey Road
London, NW10 7UW

T: 0345 345 2288
E : uk@warmup.com
F: 0345 345 2299
W: www.warmup.co.uk

v5_0818



4iE® SMART WIFI THERMOSTAT

The right temperature.
The best tariff. Effortlessly.

Use the 4iE® Smart WiFi Thermostat to control DCM-PR3