

# CLARKE INSTRUMENTS LTD

At the heart of innovative security solutions for the control of access since 1969

## Electric Releases

### Type 903


Suitable for the access control of internal or external doors . Also suitable for door interlocking via the micro switch.

#### Specification

- ◆ 12VDC 100% fail locked
- ◆ Current consumption 0.3A
- ◆ Precision machined from solid brass
- ◆ 5mm thick stainless steel faceplate
- ◆ Locking plunger - 6.3mm diameter stainless steel
- ◆ Withstands up to 7KN
- ◆ Suits wood frames
- ◆ Compatible with mortice night latches

#### Optional Extras

- ◆ 24VDC
- ◆ Fail open on power failure
- ◆ Brass faceplate
- ◆ Micro switch sensing for latch status
- ◆ Bespoke brass lead-in guide
- ◆ Non-standard faceplates to suit sash locks manufactured to order

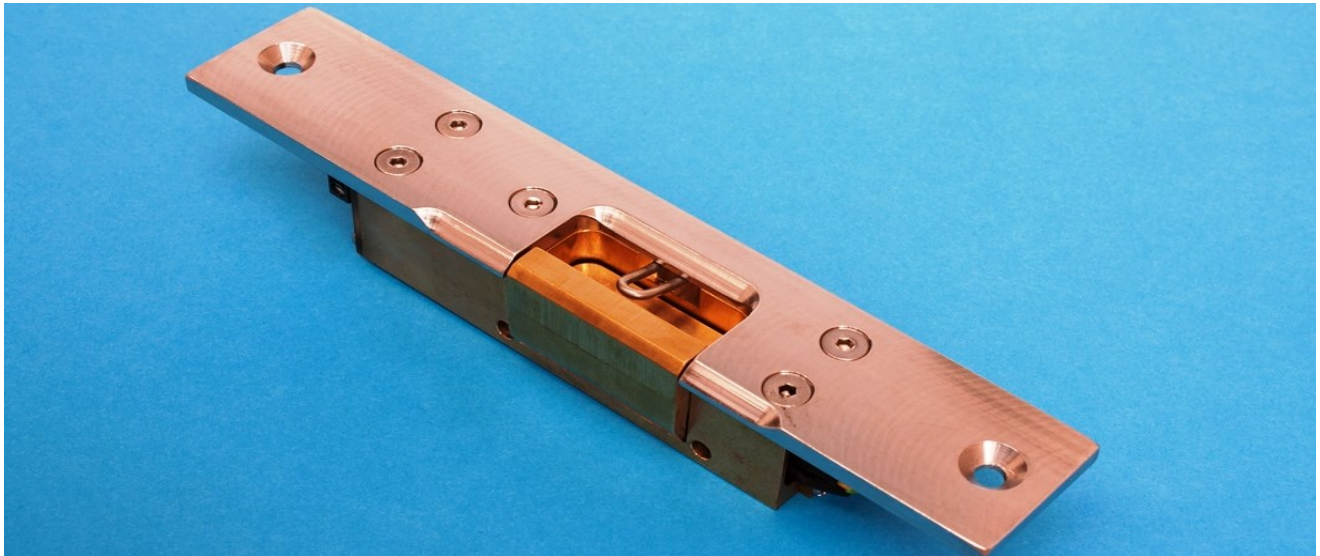

Designed and manufactured in the UK by Clarke Instruments Ltd

**CLARKE INSTRUMENTS LIMITED.**  
Distloc House, Old Sarum Airfield,  
The Portway, Salisbury, Wiltshire, SP4 6DZ  
Web: [www.clarke-inst.com](http://www.clarke-inst.com).  
Email: [sales@clarke-inst.com](mailto:sales@clarke-inst.com)



C.I.L. Products comply with  
EMC Directives of EEC  
Certificate Number FM 12702  
BS EN ISO9001:2008

