

**EN**Original Instructions
Version 4 – February 2026

TRIPLE LEG

REVERSIBLE PULLER

13908, 13909

These are the original product instructions. Read the instruction manual in full and retain for future reference.

Please visit drapertools.com/manuals for the latest version of this manual.

1. Product Introduction

1.1 Intended Use

This product is designed as a three-legged puller for removing gears, bearings, fan belts etc. from shafts or holes. The reversible legs can be repositioned to achieve various reach and spread configurations.

Part of our core range, this product is suitable for regular trade use. Any other application beyond the conditions established for use will be considered misuse. Draper Tools accepts no responsibility for improper use of this product.

Important: This manual is intended as a guide only. **ALWAYS** refer to the vehicle manufacturer's instructions to identify and operate the most appropriate tool for each vehicle.

1.2 Specification

Stock No.	13908	13909
Part No.	N133	N133
Maximum reach	65mm	102mm
Maximum spread	75mm	110mm
Screw size	11.8 x 124mm	14 x 156mm
Striking head hex size	14mm	17mm
Screw hardness	35–37 HRC	35–37 HRC
Net weight (approx.)	0.52kg	0.95kg

2. Health and Safety Information

Important: Read all the Health and Safety instructions before attempting to operate or maintain this product. Failure to follow these instructions may result in injury or damage to the user, the product or the workpiece.


- Observe all standard safety precautions and good practices when in a workshop environment and working with vehicles.
- Wear appropriate eye or face protection and protective gloves.
- Before every use, inspect the product for broken, cracked, loose or corroded parts.
Important: DO NOT use this product if it is damaged in any way.

- **ALWAYS** ensure that the tool is fitted squarely to the part to be removed.
- **DO NOT** exceed the puller's rated reach or spread.
- **DO NOT** use wrench extensions or apply excessive pressure when tightening the forcing screw.
- Apply force gradually; **DO NOT** use an impact wrench.
- Be mindful of situations where the sudden release of pressure or resistance may cause injury or damage.
- Where possible, keep the puller and part covered during operation to protect yourself from flying debris.
- Maintain good balance during operation and brace yourself to accommodate a sudden release of pressure.
- **DO NOT** modify this product in any way.

Helpline: +44 (0) 23 8049 4344 Sales Desk: +44 (0) 23 8049 4333 General Enquiries: +44 (0) 23 8026 6356
Internet: drapertools.com Email: sales@drapertools.com

3. Product Overview

- | | | |
|-------------------|-----------------|-------------------|
| (1) Forcing screw | (3) Link nuts | (5) Striking head |
| (2) Leg connector | (4) Puller legs | (6) Triple head |

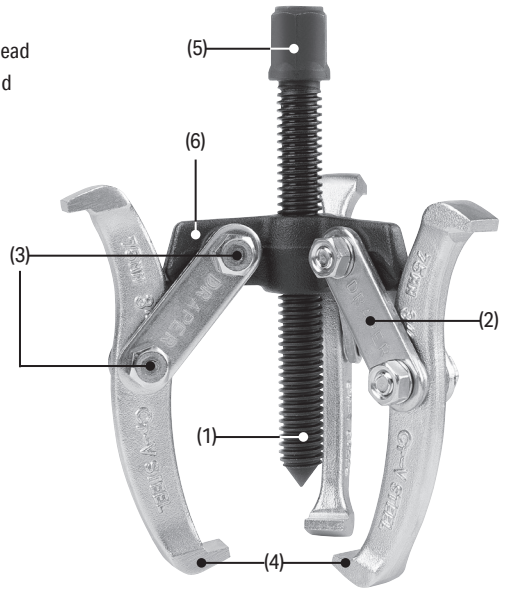

4. Operating Instructions

4.1 Notes on Use

Important: Read this section in full before attempting to use this product.

- Remove any rust from the shaft and part before installing the puller.
- Lubricate the part to be removed around the shaft and bore to reduce the friction against the shaft.
- ALWAYS** ensure that the forcing screw (1) is positioned centrally on the shaft and that both legs are securely seated against the part to be removed.
- ALWAYS** use the largest suitable puller for the part to be removed that can be accommodated.
- Tightening the forcing screw will increase the grip of the self-locking legs.
- The link nuts (3) of the puller must **NOT** be locked tight or they may damage the tool.
- Clean and lubricate the forcing screw before and after **EVERY** use.

4.2 Configurations

The puller legs (4) can be installed in various orientations to achieve different reach and spread configurations:

- Rotate the legs lengthways to adjust the reach of the tool.
- Rotate the legs widthways to switch from external to internal gripping on the part to be removed.
- Remove the leg connectors (2) entirely and attach the legs directly to the triple head (6) for the smallest reach and spread ranges achievable for this tool.
- To rotate the legs, loosen the link nuts (3) and remove the legs from the connectors, then rotate the legs as appropriate and reinstall. The legs can also be bolted directly to the triple head if the connectors are removed.

Important: ALWAYS use an appropriate configuration for the part to be removed and adjust all three legs in the same way. The puller must be attached squarely to the workpiece.

4.3 Basic Reverse Puller Operation

- Ensure that the shaft and part to be removed are clean and free from corroded material.
- Rotate the striking head (5) anticlockwise to withdraw the forcing screw (1) and provide sufficient reach.
- Locate the puller legs (4) around the workpiece and hand-tighten the forcing screw until contact is made with the shaft.

- Hit the striking head with a soft-faced hammer as you tighten the forcing screw and frequently check the positioning of the legs and forcing screw.

CAUTION! Attempting to remove parts using the forcing screw alone may stress the triple head and screw thread and damage the tool. Refer to the vehicle manufacturer's information for the correct procedure for this tool for each part.

Important: Ensure that the forcing screw is positioned at the centre of the shaft or part before tightening it. Check the forcing screw and leg positions frequently to ensure a firm and secure grip.

- Once the puller is positioned correctly and its grip is secure, use a suitable tool to tighten the forcing screw further to draw the part off the shaft.

5. Product Care and Disposal

- Clean and lubricate the forcing screw (1) and triple head (6) before and after **EVERY** use.
- Keep the puller free from dust and debris and ensure that the link nuts do not become overly tight.
- Before storing the product, wipe it thoroughly with a lightly oiled cloth to prevent corrosion.
- Store the product in a clean and dry environment, out of reach of children.
- At the end of its working life, dispose of the product responsibly and in line with local regulations; recycle where possible.

6. Explanation of Symbols



Read the instruction manual



Product spread range (example)



Wear appropriate eye protection



Central screw size (example)



Product reach range (example)



Hexagonal head (example)