






British standard 5 Lever Mortice Lock

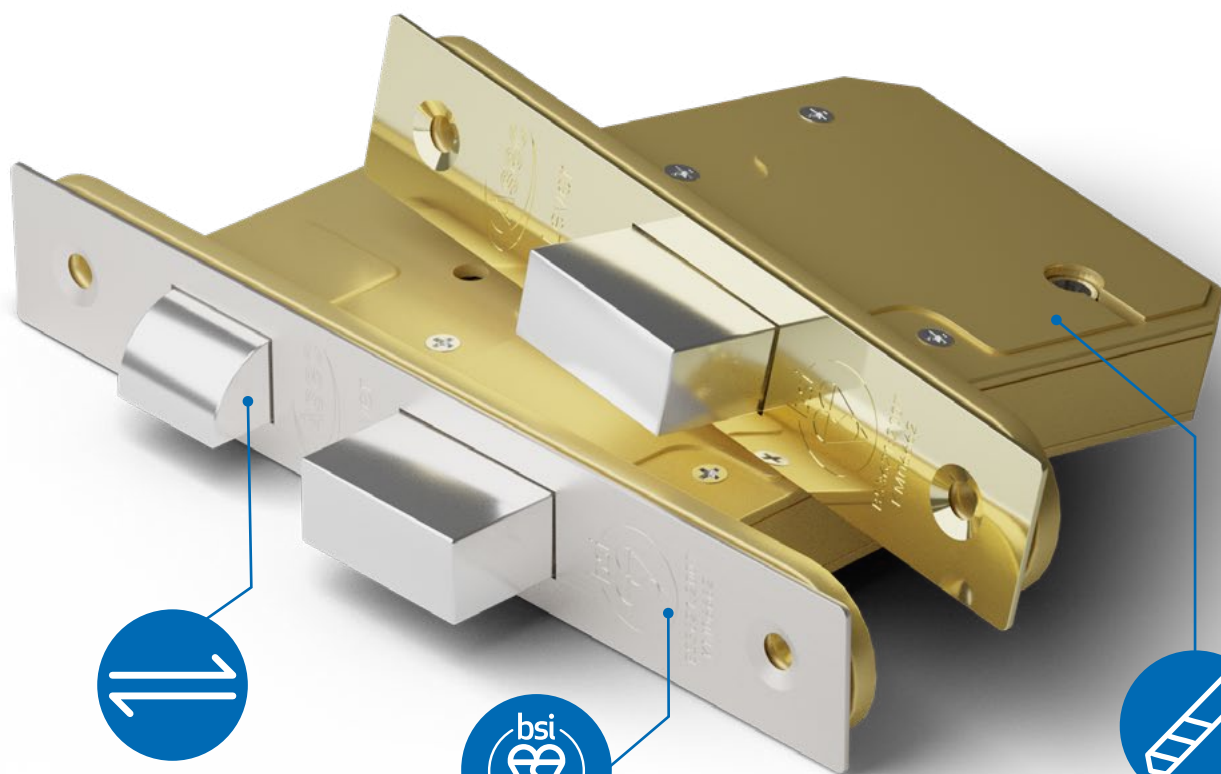

REVERSIBLE

Twist reversible
latchbolt (sashlock)



BRITISH STANDARD

Complies To BS EN 12209:2003
& BS EN 3621:2007 - KM06662



ANTI-DRILL PLATES

Steel case with integral
anti-drill plate on cap
& case

DESCRIPTION

The Asec British Standard Deadlock & Sashlock doesn't compromise on quality and is ideal for use on external doors. It has a steel case and is fitted with an integral anti-drill plate and a brass deadbolt with 2 hardened steel inserts to improve resistance against various forms of attack.

FEATURES

- Brass deadbolt with 2 hardened steel inserts
- Insurance and police approved
- 30 Minute Fire Rating (EN12209)
- Keyed to differ
- 2 plated steel keys/ 1,000 differs
- 10 year guarantee
- 5 Lever BS Mechanism

DEADLOCK

| CODES | CASE DEPTH | FINISH | PACKAGING |
|---------|------------|--------|-----------|
| AS11310 | 64mm | SS | VISI |
| AS11311 | 64mm | PB | VISI |
| AS11312 | 76mm | SS | VISI |
| AS11313 | 76mm | PB | VISI |
| AS11314 | 64mm | SS | BOXED |
| AS11315 | 64mm | PB | BOXED |
| AS11316 | 76mm | SS | BOXED |
| AS11317 | 76mm | PB | BOXED |


SASHLOCK

| CODES | CASE DEPTH | FINISH | PACKAGING |
|---------|------------|--------|-----------|
| AS11318 | 64mm | SS | VISI |
| AS11319 | 64mm | PB | VISI |
| AS11320 | 76mm | SS | VISI |
| AS11321 | 76mm | PB | VISI |
| AS11322 | 64mm | SS | BOXED |
| AS11323 | 64mm | PB | BOXED |
| AS11324 | 76mm | SS | BOXED |
| AS11325 | 76mm | PB | BOXED |

For more details on this or any products in the Asec range please visit our website
www.asec.co.uk or email us at info@asec.co.uk



British standard 5 Lever Mortice Lock

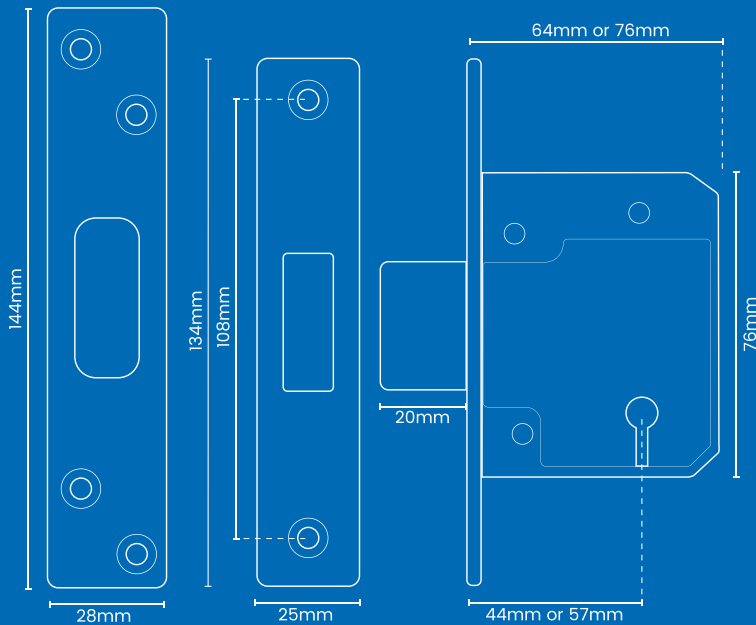

DEADLOCK

LOCK

LOCK BACKSET - 44mm or 57mm
LOCK BOLT THROW - 20mm
LOCK CASE HEIGHT - 76mm
LOCK CASE DEPTH - 64mm or 76mm

FOREND

FOREND WIDTH - 25mm
FOREND LENGTH - 134mm
SCREW HOLE DISTANCE - 108mm

STRIKE PLATE

STRIKE PLATE WIDTH - 28mm
STRIKE PLATE LENGTH - 144mm

SASHLOCK

LOCK

LOCK BACKSET - 44mm or 57mm
LOCK BOLT THROW - 20mm
LOCK CASE HEIGHT - 108mm
LOCK CASE DEPTH - 64mm or 76mm
LOCK CASE CENTRES - 57mm

FOREND

FOREND WIDTH - 25mm
FOREND LENGTH - 165mm
SCREW HOLE DISTANCE - 140mm

STRIKE PLATE

STRIKE PLATE WIDTH - 28mm
STRIKE PLATE LENGTH - 178mm

