

ECOCUT PD-24

Chlorine free neat cutting oil

Description

ECOCUT PD-24 is a chlorine free, premium duty neat cutting oil which is based on premium quality, highly refined mineral oil to which is added combined sulphurised polar components.

Note

ECOCUT PD-24 contains active sulphur, which may cause staining of yellow metals.

Application

ECOCUT PD-24 is suitable for use on heavy duty machining operations on ferrous metals, including gear hobbing and gear shaving.

Other Services


A comprehensive range of monitoring and maintenance systems are available from FUCHS Lubricants UK, incorporating fluid dispensing, recycling and disposal equipment.

Advantages/Benefits

- Environmentally improved - does NOT contain chlorinated additives
- Low misting
- Formulated for use on ferrous metals
- Contains active sulphur and polar additives to enable use on heavy duty applications

Component Protection

Following manufacturing operations Fuchs recommends the use of our fully compatible RENOCLEAN cleaners and ANTICORIT corrosion preventives to clean and protect your components. Please refer to data sheets, or contact your local Fuchs Area Manager to discuss your requirements.

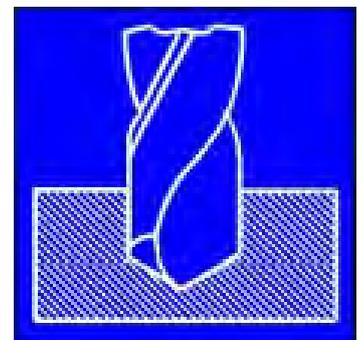

June 2014 GDUK Page 1 of 2

CHARACTERISTICS: ECOCUT PD-24

Characteristics	Unit	Test Method	
Appearance		Dark red / brown fluid	
Specific gravity at 15.6°C		0.881	IP160
Kinematic viscosity	at 40°C	mm ² /s	24.0
	at 100°C	mm ² /s	5.00
Flash point(PMCC)	°C	184	IP34