

# Connekt - 1.0 Bowl & Drainer

Reversible - Stainless Steel

abode

	<b>Abode code:</b>	AW5056
	<b>EAN 13 Barcode:</b>	5060344150804
	<b>Specification version:</b>	1
	<b>Finish:</b>	Satin Finish

## Included parts:

 <p>1 x AX1001 (m) 90mm (1.5") Orbit manual basket strainer waste - short bolt</p>	 <p>1 x AX1006 (m) Rectangular overflow pipework</p>	 <p>1 x AX1008-1 (m) 1 Bowl Pipework</p>	 <p>1 x AX1014 (m) 35mm tap hole cover plate - brushed steel</p>	 <p>1 x AX1054 (m) Inset Stainless steel fixing clips x 8</p>
 <p>1 x AX4016 (m) Fitting &amp; care instructions &amp; data sheet - st/st inset</p>	 <p>AX1057 (m) factory fitted rim worktop seal</p>			

## Compatible parts / accessories:

 <p>AX1011 Tap stabilising bracket</p>				
---	--	--	--	--

<b>Packing summary:</b> <ul style="list-style-type: none"> <li>Packaging Type: Boxed</li> <li>Packaged size L x W x D: 905 x 545 x 195mm</li> <li>Boxed weight: 5.85kg</li> </ul>	<b>Materials &amp; workmanship warranty summary:</b> <ul style="list-style-type: none"> <li>Sink materials &amp; workmanship 10 years.</li> <li>Waste kits 1 year.</li> <li>Connecting pipework 1 year.</li> </ul>	<b>Care instructions summary:</b> <ul style="list-style-type: none"> <li>Clean the products regularly using soapy water and a non-abrasive cloth, regular cleaning will prevent the build-up of lime scale and dirt.</li> <li>Avoid contact with corrosive or abrasive substances.</li> <li>After cleaning rinse thoroughly with clean water then dry, for more detail see supplied booklet or <a href="http://www.abodedesigns.co.uk">www.abodedesigns.co.uk</a></li> </ul>
---	--	--

## Mounting Dimensions:

Type of Installation:	Installation type recommended (true) or not?	Recommended minimum base unit mm (20mm wall thickness)	Overall recessed fitting width mm (required for bowl(s), tap hole, overflow)	Cut out size (length x width x corner radius mm)	Minimum - Maximum worktop thickness mm	Additional fitting notes
Inset	true	450	405	840 x 480 x R10	21 - 40	
Undermount			405			
Flushmount			405			
Apron front			405			

**Product dimensions and installation information:**




**Note:** symbol indicates position of acoustic pad on stainless steel sinks only  
**Overall product size:** 860 x 500 x 175, 8mm corner radius



**\*Important, fabricator / installer notes for undermount & Flushmount sinks:**

The cut out size indicated is aligned with outside edge of the bowl top radius (similar to the example below).



You should confirm with your client if the worksurface cutout is to be cut flush, inside or outside this suggested perimeter shape & size.

If you create the cutout smaller or larger than the indicated size then the fit of the accessories may be affected and should be physically checked.

**General:**


All details are provided in good faith but do not include the tolerances of the material or manufacturing process.

**We request that a test cutout is made in scrap timber and checked against the actual sink to be installed before committing to cutting the final worksurface.**


**Abode can not accept liability for problems or costs incurred by failure to follow this request.**

Note: the dimensions on ceramic fireclay products are subject to wider tolerances due to the nature of this natural material and the firing process.

CAD cutout files can be downloaded from [www.abodedesigns.co.uk](http://www.abodedesigns.co.uk)

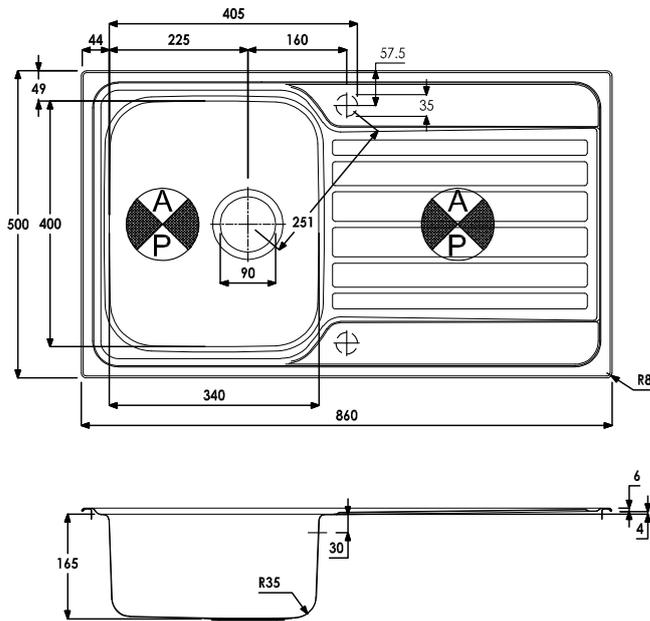

**INSET CUT OUT**

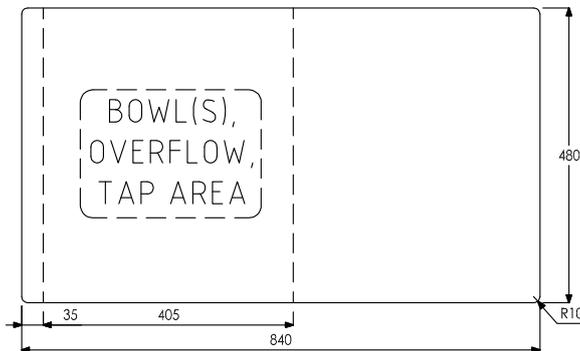

**Additional notes:**

<b>Bowl &amp; drainer details:</b>	<b>Bowl 1</b> (typically main bowl):	<b>Bowl 2:</b> (typically 1/2 or 3/4 or 2nd main bowl):	<b>Bowl 3:</b>	<b>Drainer (left)</b>	<b>Drainer (right)</b>
<b>Bowl Size</b> Width x Length x Depth x Radius (mm)	340 x 400 x 165 x 70				
<b>Bowl floor radius</b> (mm)	35				
<b>Wastehole diameter</b> (mm)	90				
<b>Overflow type</b>	Slotted, standard pattern				
<b>Wall thickness</b> (gauge mm)	0.8			0.8	
<b>Bowl texture / finish</b>	Unbrushed / satin			Unbrushed / satin	
<b>Bowl volume</b> (apx. litres)	16				

