



Product features:

- Metal construction throughout
- Thermostatic valve for safety & comfort
- 2 exit alternate control for output to 2 x shower or 1 x shower & 1 x bath
- Freshly designed contemporary blend
- 5 year limited warranty


Packaged properties:

Box length (mm): 355 Box depth(mm): 150
Box width(mm): 205 Boxed weight (Kg): 3.9

Includes pop up waste?: No

Additional comments:

Product dimensions:

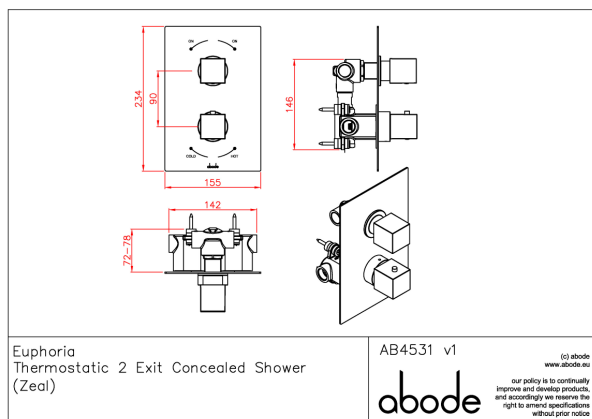


• Product mounted where: Wall
• Recommended hole size: 200 x 180 mm

• Overall Height / projection: 63 (max) mm
• Exit reach: N/A mm
• Exit height: N/A mm
• Base size: 155 x 234 mm

• Inlet centre distance(s):

• Min. fitting depth required: 72-78 mm10 mm
• Max. surface depth: n/a

Product flow characteristics:

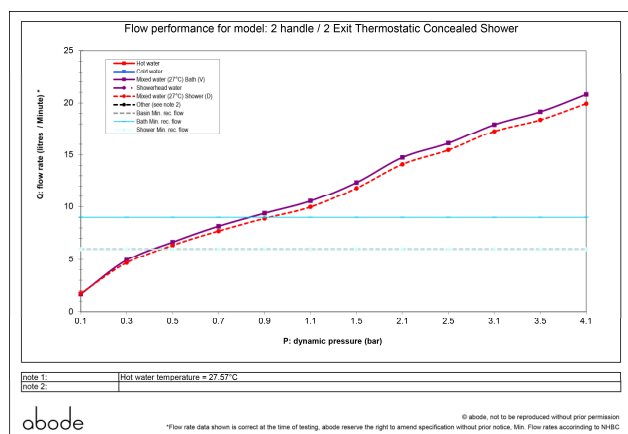

• Min / Max water pressure (bar): 0.50* / 5.00
*Detailed minimum pressure requirements for this product: Shower 0.5, Bath 0.9 (bar)

• Part G max. mixed flow rate at 3 bar (l/m): 17.92

• Inlet connection type / length: Fixed / n/a mm
• Inlet (plumbing connection) / outlet size: 1/2" F / 1/2" F

• Product flow characteristics: N/a
Non return valve(s) supplied or position: h&c inlets

• Aerator type: N/a

• Control valve type: Thermostatic and diverter (8-20)
• Includes output diverter?: Yes

• Inlet meshed particle filters included: 0.60 mm
• Shower hose type / length: N/A / N/A

Warranty Summary (full details available on request):

- Materials and workmanship defects warranted for 5 years
- Valves and working parts warranted for 5 years
- Surface warranty defects warranted for 1 year
- O-rings, hoses & gaskets warranted for 1 year

Care instructions:

- Clean the mixers and showers regularly as required, using soap, do not use any other cleaners.
- Regular cleaning will prevent the build-up of lime scale and dirt
- After cleaning rinse thoroughly with clean water to remove any cleaner residue
- Residues of liquid soaps, shampoos and shower foams can also cause damage, so rinse with clean water after using, avoid contact with any abrasives