


## Silicone LED Cable

2 Cores - Max. 5 Amps - Silicone - 0.5mm<sup>2</sup>

tagra®


SKU: SILCBL-2C

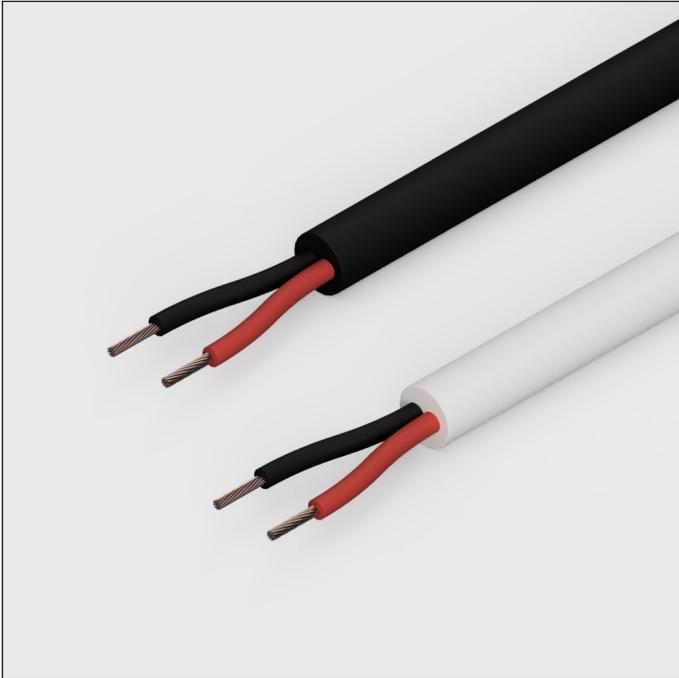

### Key Features

- ▶ 5A Current Capacity
- ▶ 300V Voltage Rating
- ▶ Black or White
- ▶ Silicone
- ▶ 10M, 50M & 100M
- ▶ 0.5mm<sup>2</sup> Conductor

### Dimensions

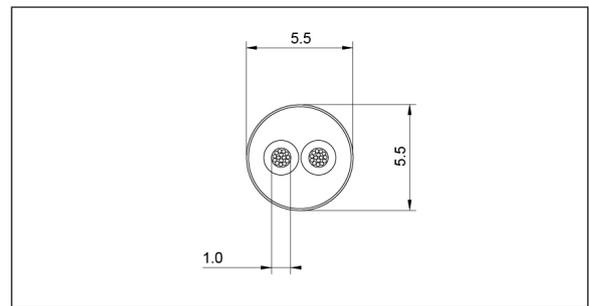

### Product Data

Conductor Cores	Conductor Cross Section	Current Rating	Dimensions
2x (20/0.18mm)	0.5mm <sup>2</sup>	5.0A per core	Ø5.5mm
Cable Gauge	Cable End	Cable Sheath	Cable Jacket
20 AWG	Tinned Copper	Silicone	White or Black
Voltage Rating	Operating Temp	Flame Retardant	Min. Bend Radius
Max. 300V	-60°C ~ +200°C	FT-2	30mm

Wire Colours	
Red	V+
Black	V-

### Available SKUs

SKU	Colour	Shape	Length
SILCBL-2C-10M-B	Black	Round	10000mm
SILCBL-2C-50M-B	Black	Round	50000mm
SILCBL-2C-100M-B	Black	Round	100000mm

SKU	Colour	Shape	Length
SILCBL-2C-10M-W	White	Round	10000mm
SILCBL-2C-50M-W	White	Round	50000mm
SILCBL-2C-100M-W	White	Round	100000mm