

Professional Horizontal Bend LED Flex

24V - 3mm x 6mm - Horizontal Bend - IP54

tagra®

SKU: NEONTOP306



24V



IP54

5YR
Warranty

Key Features

- Available in 2300K, 2700K, 3000K, 4000K & 6000K
- Cut Anywhere
- Horizontal Bend
- Up to 270 Lumens per metre
- >90 CRI
- Silicone
- Indoor use only
- Available in 5M & 30M reels
- 5 Year Warranty

Electrical Data

Voltage	Max. Current	Typ. Current	Current 5M	Max. Power	Typ. Power	Power 5M
24V	0.41A/m	0.375A/m	1.875A	9.9W/m	9.0W/m	45W


Photometric Data

Colour Temperature	CCT/Wavelength	Lumens/m	LED Chip	LEDs/m	LEDs/unit
Very Warm White	2300K	200lm	2216	240 LEDs	-
Very Warm White	2700K	245lm	Cut Points	CRI	Beam Angle
Warm White	3000K	256lm	-	>90	120°
Neutral White	4000K	270lm	SDCM	Dimmable	IC Type
Cool White	6000K	270lm	<3	Yes	
			Pixels/m	Pixels/unit	PWM Rate

Mechanical Data

Min. Bend Diameter	Bend Direction	Cable Length	Cable End	Cable Type	Wire Colours
30mm	Horizontal	1000mm	Rear Entry	20 AWG	RED V+ DC
IP Rating	IK Rating	Material	Operating Temperature		BLACK Ground GND
IP54	-	Silicone	-20°C ~ 45°C		
Lifespan	Energy Rating	Warranty	Dimensions		
50,000 Hours	-	5 Years	W3mm x H6mm		

Dimensions

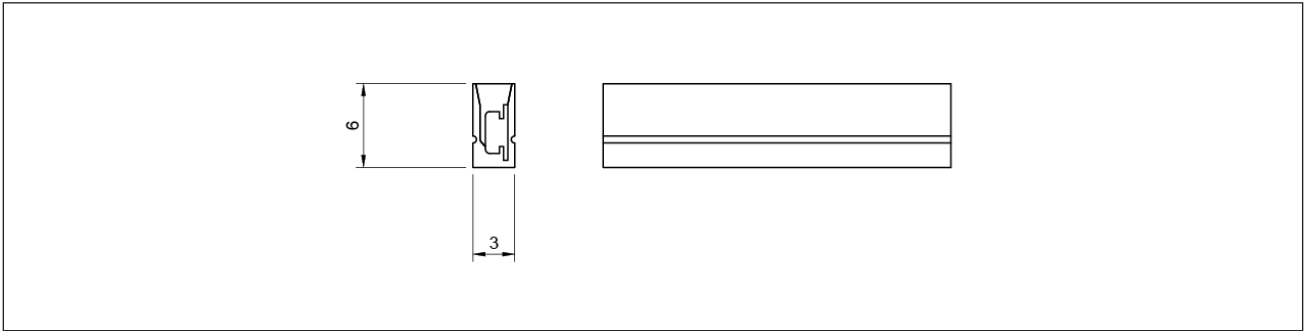

Available SKUs

SKU	CCT	IP Rating	Length
NEONTOP306-23K5M	2300K	IP54	5000mm
NEONTOP306-27K5M	2700K	IP54	5000mm
NEONTOP306-3K5M	3000K	IP54	5000mm
NEONTOP306-4K5M	4000K	IP54	5000mm
NEONTOP306-6K5M	6000K	IP54	5000mm
NEONTOP306-30M-27K	2700K	IP54	30000mm
NEONTOP306-30M-3K	3000K	IP54	30000mm
NEONTOP306-30M-4K	4000K	IP54	30000mm

Available Accessories

Type	SKU	Colour/Material	Note
End Cap	NEONTOP306-ENDCAPS-TOP	Silicone	Pack of 8, 4 Pairs
Mounting Track	NEONTOP306-ALUCHAN1MB	Aluminium	1000mm Length