


Silicone LED Cable

2 Cores - Max. 3 Amps - Silicone - 0.35mm²

tagra®

SKU: SILCBL-2C.35

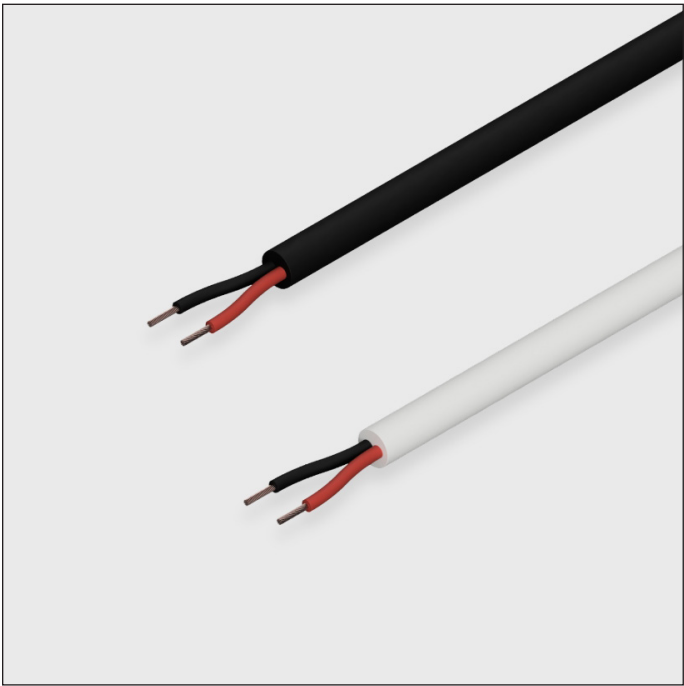

3A
Max.
Per Core

2
Core

SIL

SC

Key Features

- ▶ 3A Current Capacity


▶ 60V Voltage Rating

▶ Black or White
- ▶ Silicone

▶ 10M, 50M & 100M

▶ 0.35mm² Conductor

Dimensions

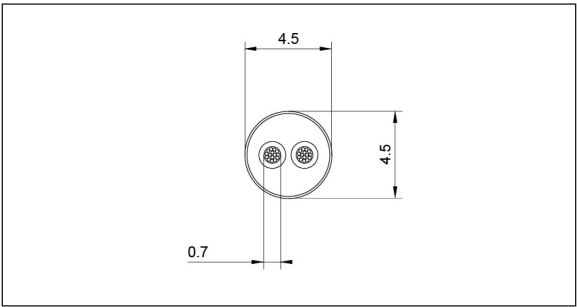

Product Data

Conductor Cores	Conductor Cross Section	Current Rating	Dimensions	Wire Colours	
2x (13/0.18mm)	0.35mm ²	3.0A per core	Ø4.5mm	Red	V+
				Black	V-
Cable Gauge	Cable End	Cable Sheath	Cable Jacket		
22 AWG	Tinned Copper	Silicone	White or Black		
Voltage Rating	Operating Temp	Flame Retardant	Min. Bend Radius		
Max. 60V	-60°C ~ +200°C	FT-2	30mm		

Available SKUs

SKU	Colour	Shape	Length	SKU	Colour	Shape	Length
SILCBL-2C.35-10M-B	Black	Round	10000mm	SILCBL-2C.35-10M-W	White	Round	10000mm
SILCBL-2C.35-50M-B	Black	Round	50000mm	SILCBL-2C.35-50M-W	White	Round	50000mm
SILCBL-2C.35-100M-B	Black	Round	100000mm	SILCBL-2C.35-100M-W	White	Round	100000mm