


24V - 12mm x 17mm - Horizontal Bend - IP67

SKU: NEON1217-10MKIT-RGBW

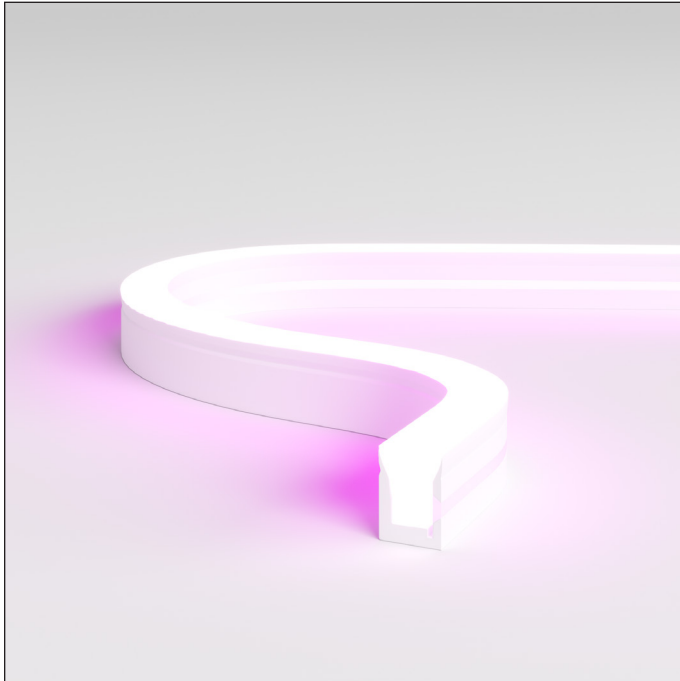

5YR
Warranty

- Available in RGB+2700K, RGB+3000K & RGB+4000K
- 83.3mm Cut Points
- Horizontal Bend
- Up to 377 Lumens per metre
- Silicone
- 10 Metre Max. Run Length
- Available in 10M reels
- 5 Year Warranty


Voltage	Max. Current	Typ. Current	Current 10M	Max. Power	Typ. Power	Power 10M
24V	0.55A/m	0.5A/m	5.0A	13.2W/m	12.0W/m	120W

Colour Temperature	CCT/Wavelength	Lumens/m	LED Chip	LEDs/m	LEDs/unit
RGB+Very Warm White	RGB+2700K	287lm	CSP LED	336 LEDs	28 LEDs
RGB+Warm White	RGB+3000K	377lm	Cut Points	CRI	Beam Angle
RGB+Neutral White	RGB+4000K	369lm	83.3mm	-	120°
			SDCM	Dimmable	IC Type
			<2	Yes	
			Pixels/m	Pixels/unit	PWM Rate

Min. Bend Diameter		Bend Direction	Cable Length	Cable End	Cable Type
120mm		Horizontal	2000mm	Double	22 AWG
IP Rating	IK Rating	Material	Operating Temperature		
IP67	IK08	Silicone	-25°C ~ 50°C		
Lifespan	Energy Rating	Warranty	Dimensions		
60,000 Hours	-	5 Years	W12mm x H17mm		

Wire Colours	
BLACK	V+ DC
RED	R-
GREEN	G-
BLUE	B-
WHITE	W-

Dimensions

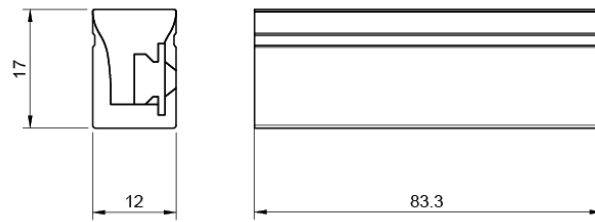

Available SKUs

SKU	CCT	IP Rating	Length
NEON1217-10MKIT-RGB27K	RGB+2700K	IP67	10000mm
NEON1217-10MKIT-RGB3K	RGB+3000K	IP67	10000mm
NEON1217-10MKIT-RGB4K	RGB+4000K	IP67	10000mm

Available Accessories

Type	SKU	Colour/Material	Note
End Cap	NEON1217ENDCAP-TOP	Silicone	Pack of 8, 4 Pairs
End Cap	NEON1217ENDCAP-LEFT	Silicone	Pack of 8, 4 Pairs
End Cap	NEON1217ENDCAP-BOT	Silicone	Pack of 8, 4 Pairs
Mounting Bracket	NEON1217-ALUFLATMOUNT-4PK	Aluminium	Pack of 4, Screws Included
Mounting Track	NEON1217-ALUCARR1M	Aluminium	1000mm Length
Bendable Mounting Track	NEON1217-MOLDCHAN05M-V2	Aluminium	Pack of 2, 500mm Length