

LED Linear Luminaire - Horizontal Suspension

24V - 35x35mm - IP20 - 120° Illumination

tagra®

SKU: 3535TL



24V

120°

IP20

3YR
Warranty

Key Features

- Available in 500mm, 1000mm, 1500mm, 2000mm, 2500mm & 3000mm
- Available in 3000K, 4000K & 6000K
- 35x35mm
- 120° Illumination
- Horizontal Suspension
- IP20 Rating
- 3 Year Warranty

Electrical Data

Voltage	Max. Current	Typ. Current	Max. Power	Typ. Wattage
24V	0.9A/m	0.83A/m	22W/m	20W/m

Photometric Data

LED Chip	Beam Angle	CRI	LEDs/m	SDCM	Dimmable
2835	120°	>80	280 LEDs	<3	Yes


Colour Temperature	CCT/Wavelength	Lumens/m	Length	Light Length	Length	Light Length
Warm White	3000K	2600lm	504mm	500mm	2504mm	2500mm
Neutral White	4000K	2700lm	1004mm	1000mm	3004mm	3000mm
Cool White	6000K	2550lm	1504mm	1500mm		
			2004mm	2000mm		

Mechanical Data

IP Rating	Cable Length	Cable	Cable Gauge	Cable Material
IP20	3000mm	Hard Wired	20 AWG	PVC
Diffuser	Size	Installation	Operating Temperature	
-	35x35mm	Suspend	-5°C ~ +40°C	
Lifespan	Energy Rating	Warranty	End Caps	Weight
60,000 hrs	D	3 Years	Black	-

Wire Colours	
RED	V+ DC
BLACK	Ground GND

Dimensions

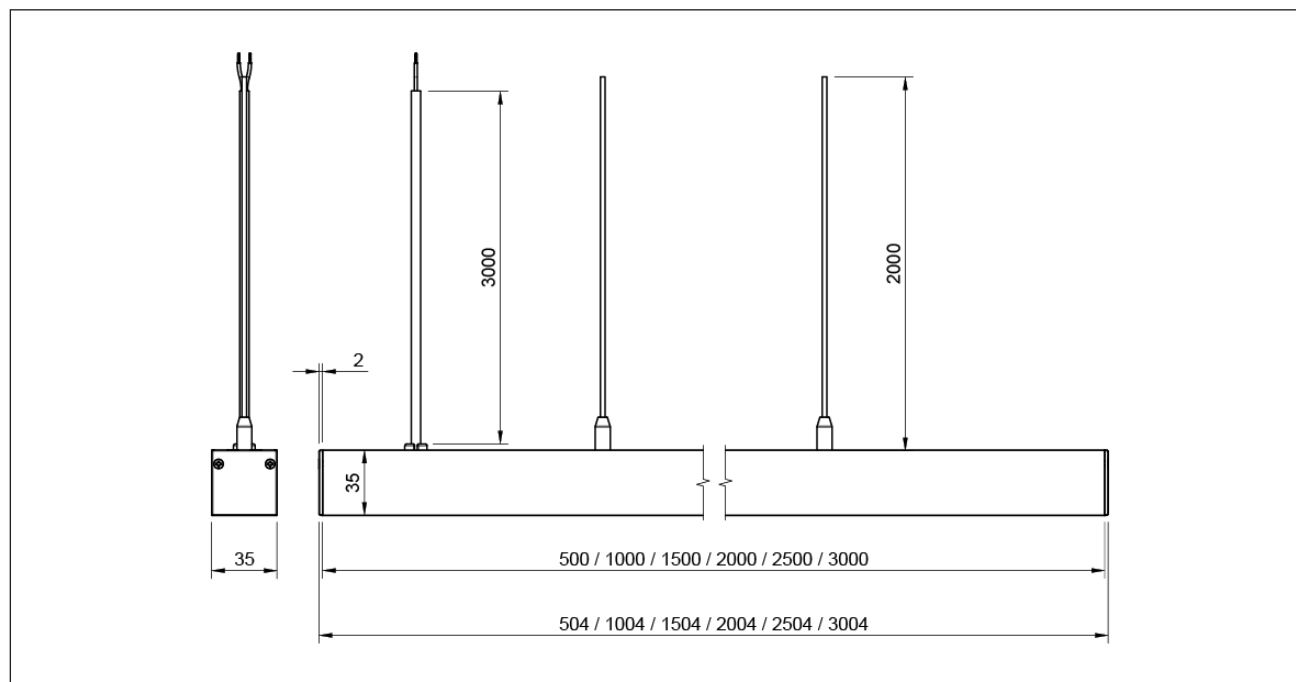

Available SKUs

SKU	CCT	Colour	Length
3535TL-0.5M-3K-BLK	3000K	Warm White	504mm
3535TL-0.5M-4K-BLK	4000K	Neutral White	504mm
3535TL-0.5M-6K-BLK	6000K	Cool White	504mm
3535TL-1M-3K-BLK	3000K	Warm White	1004mm
3535TL-1M-4K-BLK	4000K	Neutral White	1004mm
3535TL-1M-6K-BLK	6000K	Cool White	1004mm
3535TL-1.5M-3K-BLK	3000K	Warm White	1504mm
3535TL-1.5M-4K-BLK	4000K	Neutral White	1504mm
3535TL-1.5M-6K-BLK	6000K	Cool White	1504mm
3535TL-2M-3K-BLK	3000K	Warm White	2004mm
3535TL-2M-4K-BLK	4000K	Neutral White	2004mm
3535TL-2M-6K-BLK	6000K	Cool White	2004mm
3535TL-2.5M-3K-BLK	3000K	Warm White	2504mm
3535TL-2.5M-4K-BLK	4000K	Neutral White	2504mm
3535TL-2.5M-6K-BLK	6000K	Cool White	2504mm
3535TL-3M-3K-BLK	3000K	Warm White	3004mm
3535TL-3M-4K-BLK	4000K	Neutral White	3004mm
3535TL-3M-6K-BLK	6000K	Cool White	3004mm