

PC24-23KFC5M



Key Features

- Product width: 8mm
- Lm/m (up to): 1198Lm/m
- Lm/W (up to): 116Lm/W
- CRI: 90+
- Lightsource SDCM: ≤5
- Run length (max): 5m
- Available Colours: 2100K, 2300K, 2700K, 3000K, 4000K, 6000K
- Warranty: 7 Years
- Other specifications available, subject to minimum order. [Contact us.](#)

24V

150°
BEAM

From
1 Bin

>90
CRI

VERT
BEND

2oz
PCB


IP20

Mechanical Data

Body Colour	White
Bend Direction	Vertical
Cable Both Ends	1
Cable Sheath Material	PVC
Cable Weight	22 AWG
Copper Foil Weight	2 oz
Cut Points	0 mm
LEDs Per Metre	320
LEDs Total	1600

PCB Type	Flexible
Product Weight	150 g
Self Adhesive Brand	3M
Self Adhesive Model Number	300LSE
Entry Cable Direction	Both ends
Product Dimensions	5000x8x3 mm

Dimensions

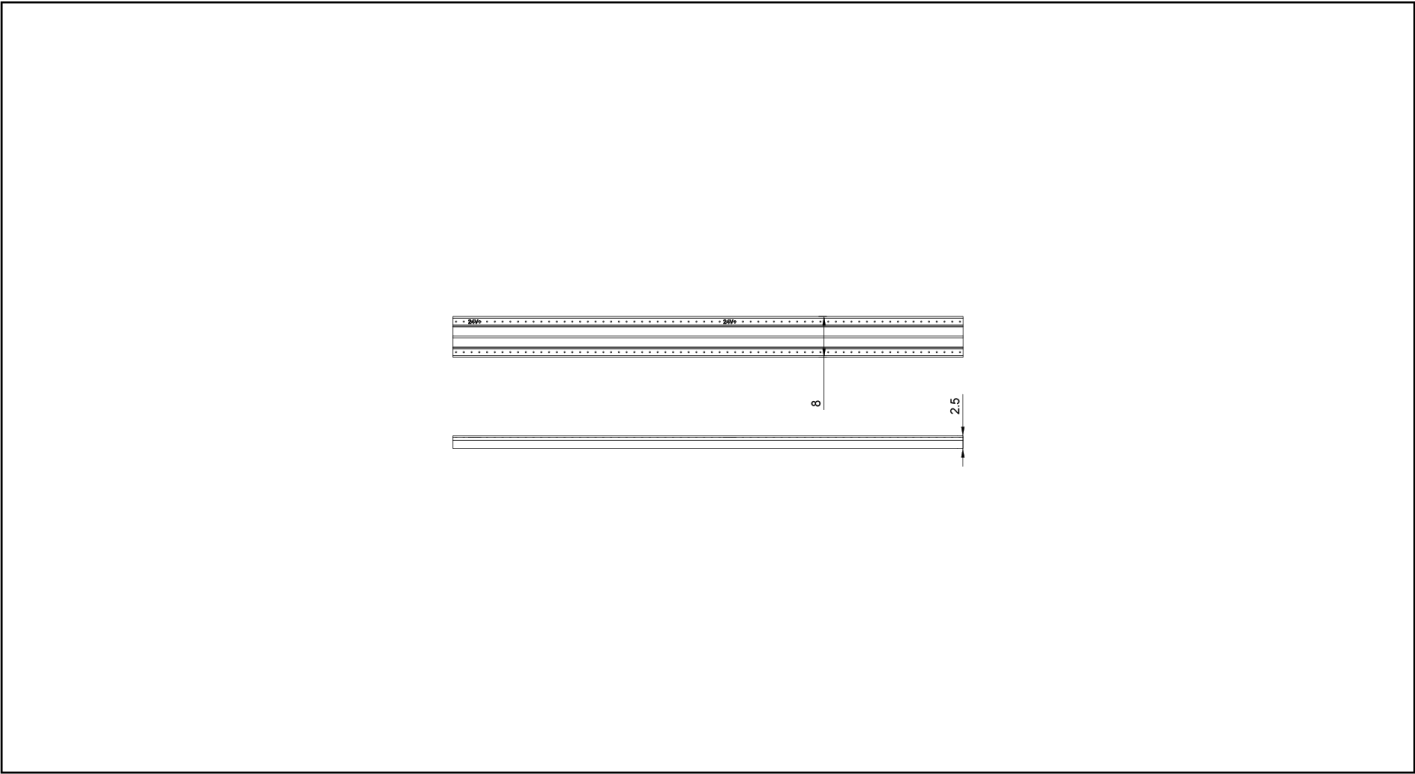

Input

Input Voltage	24 V
---------------	------

Control

Dimming Type	PWM, 0-10, TRIAC, DALI, DMX
--------------	-----------------------------

Electrical Data

Constant Voltage / Constant Current	CV
-------------------------------------	----

Current Max · @5 Metre	2.6A
Current Typ · @1 Metre	0.47
Current Typ · @5 Metre	2.35
Current Typ · @Max Run Length	2.33 A
Max · Run Length	5 m
Wattage Max · @1 Metre	11.2 W
Wattage Typ · @1 Metre	10.2 W
Wattage Typ · @5 Metre	44.8 W
Wattage Typ · @Max Run Length	44.8 W

Protection

Electrical Safety Class	III
-------------------------	-----

Photometric Data

Beam Angle	150 °
Bin Number	1
Colour Type	Single colour
CRI	90
Lumen Total	4600 Lm
SDCM	< 5
Lumens Per Metre	920 Lm/m
Lumens Per Watt	99 Lm/W
R9 Value	62
CCT	2300 K

Environment

Application Environment	Hospitality, Commerical
-------------------------	-------------------------

Ingress Protection (IP)

IP20

Efficiency

Energy Efficiency Class

F

L70B50

50000 Hours