

Key Features & Benefits:

- Reduces Light Pollution and Adverse Effects on Wildlife
- Utilizes Existing Fixtures for Fast and Cost Effective Installation
- Indoor and Outdoor Applications:
 - Beach Front & Waterways
 - Airports
 - Commercial & Retail
 - Parking Lots & Buildings
 - Food & Beverage Production
- 10 Year Warranty
- Optimized Pin Array Heatsink
- Overheat Shutdown
- L70 Lifetime >100,000 Hours
- Intelligent Thermal Control
- Compatible with Networked Lighting Control Qualified Systems

Project: _____


Date: _____

Catalog #: _____

Notes: _____

Product Specifications:

Wattage: 105W
 Kelvin: 590NM
 Max Lumen Output: 8,600 Lumens
 Max Efficacy: 82 lm/W
 Voltage: 277–480 VAC
 Input Frequency: 50/60 Hz
 Surge Protection: Yes
 Operating Temperature: -40°F to 176°F (-40°C to 80°C)
 Dimming: 0–10V 12V AUX
 Dimming Range: 0-100%
 Dim to Off: true
 CRI: >75
 Dimensions: L6.81" x W4.88" x H2.6"
 Weight (lbs): 1.05
 Finish: WH (White)
 L70 Lifetime Calculated per TM21: 100,000 hours
 Warranty: 10 Year

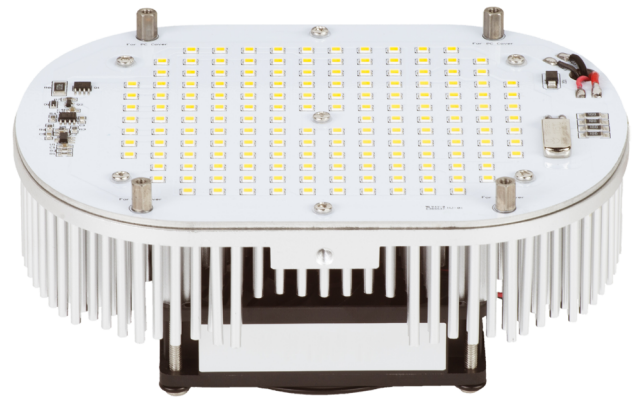

Ordering Guide:

ESL	TYPE	WATTS	GEN	KELVIN	VOLTAGE
ESL	MUR	105W	3	590N	HV
	(MUR) MultiUse Retrofit	(105W) 105 Watts (120W) 120 Watts (150W) 150 Watts (200W) 200 Watts		(590NM) Amber	(Blank) 120 V (HV) 277–480 V

