



- ✓ OVER 100 NEW ADDITIONS
- ✓ OUTSTANDING CUSTOMER SERVICE
- ✓ SPEEDY NEXT DAY DELIVERY
- ✓ QUALITY ASSURED PRODUCTS



2022

www.durite.co.uk



**THE TRUSTED QUALITY
BRAND FOR PROFESSIONALS**

CCTV & VEHICLE SAFETY

LIGHTING

SWITCHES & INDICATORS

CABLE & WIRING

POWER CONVERSION

EQUIPMENT & ACCESSORIES

RELAYS & FLASHER UNITS

REPLACEMENT COMPONENTS

BATTERY MAINTENANCE

WORKSHOP & TEST EQUIPMENT

LEADERS IN VEHICLE SAFETY & AUTO ELECTRICAL PARTS



Durite is the UK's leading brand in Vehicle Safety, Lighting, and auto electrical parts, servicing the UK Transport industry, end-user fleets & manufacturers.

For over 85 years, Durite has built an impeccable reputation supplying high quality parts to the commercial vehicle market.

From our All-in-One FORS and DVS Compliant Kits to the 1000s of reliable core components that keep your vehicles going, we will always have the perfect solution for you, your fleet and your business.

Durite are a FORS Associate Supplier, SMMT, Logistics UK, CEA, and AVI member with an ISO 9001:2015 certification.

"THE TRUSTED QUALITY BRAND FOR PROFESSIONALS"



LOGISTICS UK




THE DURITE QUALITY

From our accreditations to our team members who sample and check our products, you can rely on Durite's quality assurance which is central to our reputation.



CUSTOMER SERVICE

We pride ourselves on outstanding customer service at every contact level with Durite. Our team embodies a wealth of experience and in-depth knowledge. Contact us info@durite.co.uk.



OUR OPERATIONS

Product availability and reliability of delivery are vital to our customers. That's why we offer next day delivery as standard. Order what you want, when you want on www.durite.co.uk.



WE'RE ON SOCIAL MEDIA FOLLOW US @DURITELIMITED

DURITE IS A SAFE FLEET BRAND

Safe Fleet, the global leader in fleet safety, provides smart solutions to vehicle manufacturers and operators of fleets of every type: Public Service Vehicles, Emergency services, Truck & Trailer, Construction, Agriculture, Waste & Recycling.

Being part of the Safe Fleet family gives Durite access to strong research & development capability; allowing us to innovate and expand our safety range.



CONTENTS



CCTV KITS & VEHICLE SAFETYp7

DVR Kits | Durite Live | Integrated DVR Kits | FORS & DVS | CCTV Monitoring Kits | 4G Cam & Dash Cams | Telematics | Blind Spot Systems | Back Up Alarms | Buzzers | Mirrors | DVRs | Cameras | Monitors | Accessories



LIGHTING p45

Warning Lights | Light Bars | Beacons | Work Lamps | Interior/Exterior Lights | Rear Combination Lights | Single Function Vehicle Lights | Marker Lamps | Number Plate Lamps | Headlamps | Reflectors | Bulbs



SWITCHES & INDICATORS p101

Ignition Switches | Battery Isolators | Dashboard Switches | Rotary Switches | Push Button Switches | Push/Pull Switches | Door & Foot Switches | Push Button Controls



CABLE & WIRING ACCESSORIES..... p127

Cable | Connectors | Terminals | Multiple Connectors | Terminal Boxes | Tubing & Sleeving | Fixings & Accessories | Power Transfer | Fuses | Circuit Breakers | Fuse Holders & Boxes | Wiring Assortment Boxes



POWER CONVERSION p197

Modified Wave Inverters | Sine Wave Inverters | Voltage Converters



EQUIPMENT & ACCESSORIES p209

Split Charging | Power Plugs & Sockets | Trailer Plugs | Gauges | Retractable Cables | Wiper Equipment | Horns | Fans | Speakers | Aerials | Oil & Fuel Pumps



RELAYS & FLASHER UNITS p241

Programmable Timer Relays | Make & Break Relays | Change-Over Relays | Aftermarket Range of Relays | Flasher Units | Sockets | Relay Boxes



REPLACEMENT COMPONENTS p255

Solenoids | Regulators | Alternator Connector | Fuel Pump Relays | Glow Plugs | Glow Plug Controllers



BATTERY CHARGERS & MAINTENANCE p269

Booster Packs | Battery Chargers | Battery Testers | Battery Hydrometers | Battery Maintenance Equipment



WORKSHOP TOOLS & TEST EQUIPMENT..... p279

Workshop Tools | Inspection Lamps | Wiring Tools | Test Equipment | Soldering | Workshop Power



MERCHANDISING..... p295

Standalone Stands | Wall Mounted Stands | Counter Display Stands | Signs

FEATURED PRODUCTS & LATEST ADDITIONS

CCTV KITS & VEHICLE SAFETY

COMPLIANT VEHICLE SAFETY KITS

All systems comply with FORS, CLOCS and DVS.

- ✓ 2-year warranty
- ✓ Installation services available

See pages 12 & 13 for more information.



Best-in-class quality kits



A COMPREHENSIVE RANGE OF QUALITY DVR KITS

Comply, Record, Live Stream or all 3.

- ✓ Hard drive or SD card DVRs
- ✓ Up to 8 camera inputs
- ✓ 960H, 720p HD and 1080p Full HD resolution options

See pages 8–11 for more information.



1080p

Full HD resolution options

BLIND SPOT SYSTEMS

Durite Blind Spot Detection Systems.

Detect objects along the left, right and rear sides of your vehicles.



See pages 22–24 for more information.

WIDER RANGE OF CAMERA MONITORING KITS

- ✓ 2, 3, 4 & 6-channel kits
- ✓ 5", 7" & 9" monitors
- ✓ 1080p, 720p resolution
- ✓ Wireless & waterproof kits available

See pages 14–18 for more information.



DASH CAMERAS TO SUIT ALL NEEDS

- ✓ Full HD recording
- ✓ Touch screen
- ✓ Lockable
- ✓ Single or dual option
- ✓ Built-in GPS
- ✓ 4G live streaming

See page 19 & 20 for more information.



POWER CONVERSION

OVER 45 INVERTER MODELS

- ✓ 12V or 24V
- ✓ Pure sine or modified wave
- ✓ 125W, 140W, 250W, 500W, 600W, 800W, 1000W, 1500W, 2000W, 2200W, 2500W, 2700W or 3000W
- ✓ Fast USB charging
- ✓ 230V or 110V



Light & compact



See pages 198–201 for more information.

BATTERY CHARGERS & MAINTENANCE

BOOSTER PACKS

- ✓ 12V
- ✓ Compatible with both petrol and diesel vehicles
- ✓ Vehicle battery health status & state-of-charge LCD display
- ✂ **Other booster packs available.**

- ✓ 12V
- ✓ Compatible with both petrol and diesel vehicles
- ✓ Built-in air compressor
- ✓ Air compressor: 120PSI

See page 270 & 271 for more information.



12V vehicles



LIGHTING

EXTENSIVE RANGE OF BEACONS



Approved

- ✓ 12/24V
- ✓ Amber, green, purple or clear lens
- ✓ Single, 3-bolt, Flexi-DIN or magnetic
- ✓ 3 flash patterns
- ✓ Low profile



See pages 56–59 for more information.

WIDER RANGE OF LIGHT BARS



Approved Approved

“Robust, R65 & low profile”

- ✓ 12/24V
- ✓ Amber LEDs or lens
- ✓ Mini, 1ft, 2ft, 3ft, 4ft & 5ft
- ✓ 1-bolt, 4-bolt or magnetic
- ✓ 360° bright light output
- ✓ Rechargeable option




See pages 52–55 for more information.

MULTIPLE **NEW** MODELS ADDED TO RANGE OF LED WORK LAMPS

- ✓ LED
- ✓ 12/24V
- ✓ Waterproof
- ✓ Up to 16,800 lumens
- ✓ Round, square, oval or rectangular
- ✓ Reversing & forklift options
- ✓ Single bolt or magnetic base
- ✓ R10, R65, R23, R112 or ADR approved

See pages 60–71 for more information.



Oval

Heavy duty



With warning light



Warning light & DRL



Flood or Spot



Super Bright

NEW ADR APPROVED LAMPS

ADR approval shows the unit is sealed, intrinsically safe & ideal for vehicles transporting dangerous goods.

- ✓ Work lamps
- ✓ Marker lamps

See page 64 & 86 for more information.



Approved



EXPANDED RANGE OF WARNING LIGHTS

- ✓ Amber, blue, red or white LEDs
- ✓ 12/24V
- ✓ Waterproof
- ✓ Up to 36 flash patterns
- ✓ Synchronisation within the range

NEW Combined warning light & work lamps

See pages 46–51 for more information.



Approved



WORKSHOP TOOLS & EQUIPMENT

BRUSHLESS IMPACT WRENCH

- ✓ Cordless
- ✓ Reverse/forward function
- ✓ CE approved

1 hour fast charge



See page 280 for more information.

ENHANCED RANGE OF RECHARGEABLE INSPECTION LAMPS

- ✓ Cordless
- ✓ Wireless charging option
- ✓ Up to 2,000 lumens
- ✓ CE approved

See pages 281–283 for more information.



LIST OF OUR LATEST ADDITIONS

CCTV KITS & VEHICLE SAFETY



**Fully Compliant
4G DVR Kits**
0-774-26/27 | page 13 ▶



**AHD Number Plate
CCTV Kit**
0-774-72/73 | page 17 ▶



**4.3" Wireless
Camera Kit**
0-776-43 | page 18 ▶



**Multi-Frequency
Back-Up Alarm**
0-564-21 | page 25 ▶



**Double Engage, Night
Silent Back-up Alarm**
0-564-13 | page 25 ▶



**Self Adjusting
Tonal Alarm**
0-564-12 | page 25 ▶



**Tonal Alarm with
Night Silent**
0-564-06 | page 26 ▶



**Self Adjusting
Multi-Frequency Alarm**
0-564-03 | page 26 ▶



**USB Programmable
Alarm**
0-564-75 | page 27 ▶



1080p 8-Channel DVR
4-776-81 | page 30 ▶



**1080p Forward Facing
IP Camera**
0-876-63 | page 32 ▶



**AHD 1080p & 720p
Number Plate Lamps**
0-774-70/71 | page 34 ▶



**Magnetic Wireless
Camera**
0-774-82 | page 39 ▶



360° Swivel Bracket
0-774-99 | page 39 ▶



**French Blind Spot
Warning Sign**
0-870-54 | page 43 ▶

LIGHTING



**Amber/Red & Amber/
White Warning Light**
0-441-65/67 | page 46 ▶



**4-LED Amber
Warning Light**
0-441-72 | page 46 ▶



**R65 High Intensity
LED Warning Lights**
0-441-63/64/66 | page 47 ▶



**R65, SAE CLASS2
Warning Lamp**
0-441-20 | page 48 ▶



**12-LED Warning Lamp
with Scene Light**
0-441-62 | page 49 ▶



**R65 Amber Corner
Warning Lamp**
0-441-61 | page 49 ▶



**Amber Warning Light
with NPL**
0-441-85 | page 49 ▶



**R65 Dual Function
Warning Lights**
0-441-55/56/57 | page 49 ▶



6-LED Warning Light
0-442-29 | page 51 ▶



**1FT Rechargeable
Magnetic Light Bar**
0-443-04 | page 53 ▶



**1FT Amber LED
Light Bars**
0-443-81/82 | page 53 ▶



**LED Light
Switch Panel**
0-443-98 | page 55 ▶




**2500 Lumens Hive
Work Lamp**
0-420-04 | page 60 ▶



**Oval Bezel LED
Work Lamp**
0-420-18/19 | page 63 ▶



**ADR Approved
Work Lamps**
0-421-20/21/22/25
page 64 ▶



**LED Work Lamp with
Amber Warning**
0-420-08/09/11 | page 64 ▶



**Heavy-Duty Combo
Beam LED Work Lamp**
0-421-31 | page 65 ▶



**5000 Lumens
Work Lamp with DT**
0-421-32 | page 65 ▶



**2800 Lumens
Work Lamp with DT**
0-421-30 | page 65 ▶



**LED Work Lamp with
Flexi-Din & Handel**
0-420-62 | page 66 ▶



**R10 Work Lamp Bar
with Warning Light**
0-420-15 | page 67 ▶



**Driving Lamp Bar with
Warning Light & DRL**
0-420-12/17 | page 68 ▶



**Driving Lamp Bar
with DT & DRL**
0-420-16 | page 68 ▶



**5" Cube Driving
Work Lamp**
0-420-13 | page 68 ▶



**9" LED Round High
Beam/Position Lamp**
0-420-28 | page 69 ▶



**140mm 5-Function
LED Rear Lamp**
0-097-55 | page 81 ▶



**5 or 4-Function LED
Rear Combo Lamp**
0-295-65/66 | page 81 ▶



**4-Function LED Rear
Combination Lamp**
0-300-30 | page 82 ▶



**ADR Approved LED
Marker Lamps**
0-169-00/05/10 | page 86 ▶



**LHD & RHD LED
Head Lamps**
0-422-20/21/22/23
page 90 ▶

WORKSHOP TOOLS & EQUIPMENT



Impact Wrench & Kit
0-467-40/41 | page 280 ▶



**Dual Rechargeable
LED Inspection Lamp**
0-699-62 | page 281 ▶



**12V Mini
Booster Pack**
0-649-28 | page 270 ▶



**Heavy-Duty
LED Inspection Lamp**
0-699-63 | page 281 ▶



**Rechargeable LED
Inspection Lamp**
0-699-64 | page 281 ▶




**12V Booster Pack
with Air Compressor**
0-649-45 | page 271 ▶



**Wireless Charging
LED Inspection Lamps**
0-699-40/41 | page 281 ▶

BATTERY CHARGERS & MAINTENANCE

CABLE & WIRING ACCESSORIES



**100m 6.0 Thin Wall
Cables**
page 129 ▶



**100m 3 Core Thin
Wall Cable**
0-994-60 | page 133 ▶



**100m 4 Core Thin
Wall Cable**
0-994-40 | page 134 ▶

EQUIPMENT & ACCESSORIES



**Commercial Wiper
Blades Range**
page 230 ▶



**3000W 110VAC
Modified Wave Inverter**
0-856-41 | page 198 ▶




**24V 1500W & 2500W
Sine Wave Inverter**
0-857-66/75 | page 200 ▶

POWER CONVERSION

MOBILE-FRIENDLY WEBSITE

WWW.DURITE.CO.UK

“Order what you want, when you want with our mobile friendly website”

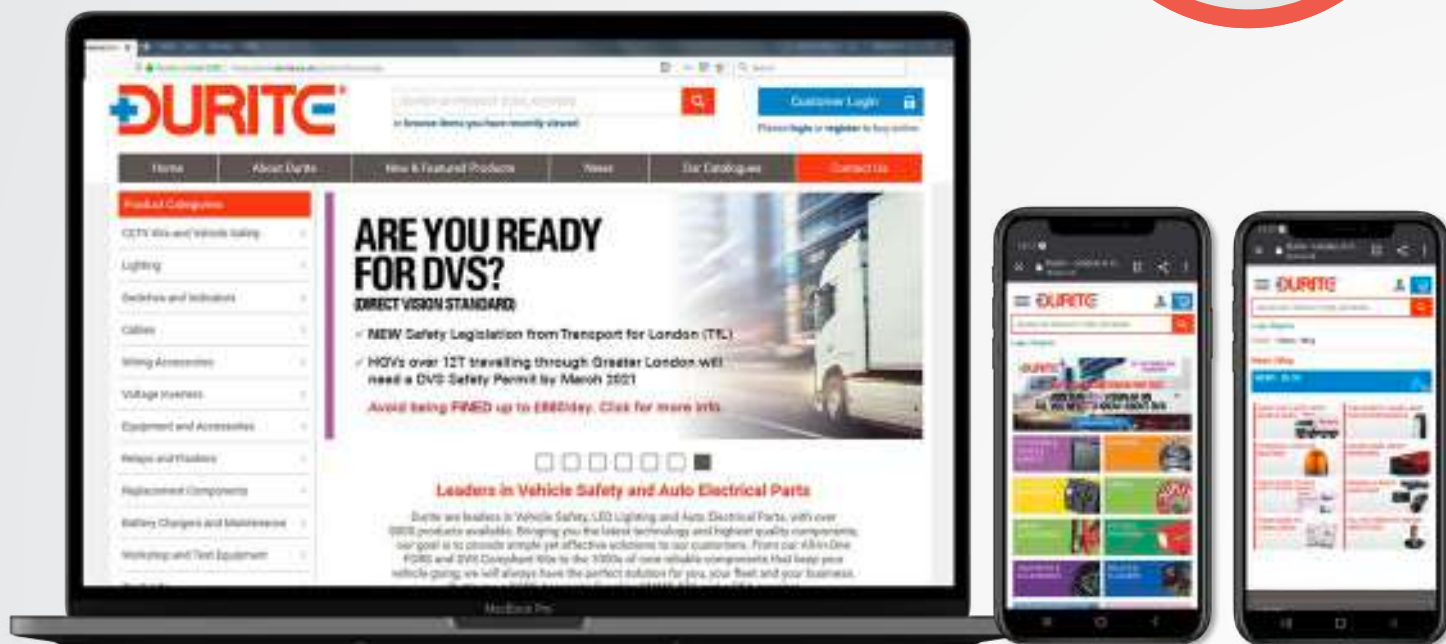

Benefit from...

- ✓ Best prices available
- ✓ Easy ordering
- ✓ Online invoices
- ✓ Order tracking
- ✓ View new products & latest promotions
- ✓ Technical data & leaflets
- ✓ Blogs; expert advice & industry updates

WE'RE ON SOCIAL MEDIA FOLLOW US @DURITELIMITED



LOOK OUT FOR...

-  Our latest video content showcasing Durite products in action
-  Expert advice on products, regulations and industry trends



01

CCTV KITS & VEHICLE SAFETY



**THE HIGHEST QUALITY
PRODUCTS & LATEST
TECHNOLOGY TO FIT
YOUR FLEET,
YOUR BUSINESS.**

DVR KITS	8
DURITE LIVE & INTEGRATED DVRS.....	10
COMPLIANT KITS - FORS & DVS	12
CCTV MONITORING KITS.....	14
4G CAM & DASH CAMS.....	19
TELEMATICS	21
BLIND SPOT SYSTEMS.....	22
BACK UP ALARMS.....	25
BUZZERS.....	27
MIRRORS	28
DVRS	30
CAMERAS.....	32
MONITORS.....	35
ACCESSORIES.....	39

DVR KITS

Durite DVR kits;

- Encourage better driver behaviour
- Reduce risk of accidents and help lower insurance premiums
- Record high-quality videos and play back anytime



GPS



Password protected



Hard Drive or SD Card DVRs



1080p or 720p resolution

HD HARD DRIVE DVR KITS



720p

HD
Resolution

HDD

Hard Drive



4 or 5
cameras



E-Marked

DURITE BEST-IN-CLASS HIGH DEFINITION DVR KIT PROVIDES THE DRIVER WITH BETTER VISIBILITY ALL ROUND, AND CAPTURES CRYSTAL-CLEAR EVIDENCE.

- Allows drivers to reverse and manoeuvre more safely
- Prevents accidents, personal injury and saves lives
- Prevents vehicle and property damage

Durite high definition DVR & CCTV kit includes a HD DVR with 1TB hard drive, 1 x 7" monitor, 1 x rear view 720p HD camera (x2 0-774-14 kit only), 1 x forward-facing 720p HD camera (1080p IP camera on 5 camera kits), 2 x side 720p HD cameras, 1 x 1080P dome camera (0-876-48 kit only), 1 x 20m and 3 or 4 x 5m leads.



Vibration-resistant design



Supports up to 5 cameras



Comes with 3-yr warranty



✂ Supplied with 1TB hard drive & alarm cable.



Recover footage directly from your HDD with our digital hard drive reader. **Part no. 0-876-33.**

“

Record crystal-clear video footage.

”

PART NO.	DESCRIPTION	QTY
0-775-87	720p HD 5-channel DVR & 4 cameras	1
0-876-48	HD 5-channel DVR & 5 cameras (extra dome camera)	1
0-774-14	HD 5-channel DVR & 5 cameras (extra rear camera)	1

CCTV KITS & VEHICLE SAFETY DVR KITS



ONLY WANT A FORWARD FACING CAMERA?

NEW 4G forward facing camera with Integral DVR
View page 19 for more information >



4G

WANT AN EASIER INSTALLATION?

NEW Camera monitoring kit with Integral DVR
View page 11 for more information >



HIGH DEFINITION HARD DRIVE DVR KITS



Spec Improvement



Full HD Resolution



Hard Drive



8 channels

Durite high definition 8-channel DVR kit includes a DVR with 1TB hard drive, 1 x 7" monitor, 1 x forward-facing HD camera, 1 (or 2) x rear HD camera, 2 x side HD cameras, 1 (or 2) x 20m and 3 (or 4) x 5m leads.

- 8-channel DVR for up to 8 cameras
- G-force sensor & GPS
- Supplied with 1TB HDD

Kit will accept 2 x 2TB hard drive max.



PART NO.	DESCRIPTION	QTY
0-775-86	720p HD 8-ch DVR & 5 cameras	1
0-775-88	720p HD 8-ch DVR & 5 cameras - mirror image	1

PART NO.	DESCRIPTION	QTY
0-774-02	1080p Full HD 8-ch DVR & 4 cameras	1



ADDITIONAL CAMERAS?

See pages 32–35.

SD CARD DVR KITS



Standard or HD Resolution



SD Card



4 cameras

Durite DVR & CCTV Kit includes a 4-channel DVR, 1 x 7" monitor, 1 x rear view camera, 1 x forward-facing camera, 2 x side cameras, 1 x 20m and 4 x 5m leads and comes with 1 x 32GB SD card.

- Perfect for 12V & 24V applications
- Infrared cameras for day & night vision
- Records on up to 2 x 128GB SD cards (1 x 32GB included)



PART NO.	DESCRIPTION	QTY
0-775-76	960H SD DVR & CCTV reversing kit	1
0-775-77	960H SD DVR & CCTV reversing kit - mirror image	1
0-775-36	720p SD DVR & CCTV reversing kit	1

Q Small side cam 960H kit; Mirror image - 0-775-78.



ADDITIONAL SD CARDS?

See page 41.

DURITE LIVE DVR KITS

4G HD DVR KITS

WITH DURITE LIVE

“

Exceptional fleet management capabilities.

”



4G live stream multiple vehicles



Real-time GPS tracking.
Follow your fleet on a map



Hosted on Durite secure cloud



HD

Crystal clear
footage with HD
cameras



Vibration-resistant
design for 360°
installation anywhere



Warranty
3-year warranty



E-Marked
Reliable, certified
Durite products

4G TECHNOLOGY ALLOWS YOU TO REMOTELY LIVE STREAM VIDEOS, ACCESS FLEET DATA & REPORTS FROM ANY DEVICE.

- Follow your fleet on a map
- Get real-time notifications in case of an incident
- Receive alerts if a camera is covered or down
- Record high definition footage
- Download & schedule reports

Durite high definition 4G DVR Kits with Durite Live include; 1 x 4G DVR with 1TB hard drive, 1 x 7" monitor, 1 x forward-facing HD camera, 1 x rear HD camera, 2 x side HD cameras, 1 x HD dome camera (0-876-43 only) 1 x 20m and 3 (or 4) x 5m leads.



Touchscreen option available.



PART NO.	DESCRIPTION	QTY
0-876-39	DL1 4G DVR kit + 4 cameras (all 720p HD)	1
0-876-41	DL1 4G DVR kit + 4 cameras (inc. 1080p Full HD forward-facing camera)	1
0-876-43	DL1 4G DVR kit + 5 cameras (inc. 1080p Full HD forward-facing camera & dome camera)	1



Want a SD Card version with Durite Live?
0-774-06 (includes 2x256GB SD Cards).

*12-month subscription required to access the Durite Live portal (0-876-99).

INTEGRATED CCTV & DVR KITS

Durite integrated DVR CCTV kits are an all-in-one camera monitoring and recording solution. With no separate DVR box they are easy to install. Record straight onto the monitor, saving time and money.

7" 4-CHANNEL 720P HD CCTV KIT WITH INTEGRATED SSD DVR

12/24V

- Records onto 480GB Solid State Drive
- Additional storage capacity 1 x SD card up to 256GB (Supplied with 1 x 32GB SD card)
- GPS & G-force sensor
- Waterproof camera (IP68) and monitor (IP65)
- 7" touchscreen monitor
- 6G anti-vibration protection
- Inputs for up to 4 cameras



Built-in DVR



Password protected & built-in lock

PART NO.	DESCRIPTION	QTY
0-774-03	7" monitor with built-in DVR + 4 cameras	1
0-774-04	7" monitor with built-in DVR + 1 camera	1

9" 6-CHANNEL 720P HD CCTV KIT WITH INTEGRATED SSD DVR

12/24V

- Records onto 480GB Solid State Drive
- Additional storage capacity 2 x SD cards up to 256GB each (Supplied with 1 x 32GB SD card)
- GPS & G-force sensor
- Waterproof camera (IP68) and monitor (IP65)
- 9" touchscreen monitor
- 6G anti-vibration protection
- Inputs for up to 6 cameras



Built-in DVR



Password protected & built-in lock

PART NO.	DESCRIPTION	QTY
0-774-00	9" monitor with built-in DVR + 4 cameras	1
0-774-01	9" monitor with built-in DVR + 1 camera	1

9" monitors are recommended by FORS.

7" WIRELESS 4-CHANNEL 720P HD CCTV KIT WITH INTEGRATED CARD DVR

12/24V

- Records onto a SD card up to 128GB (1 x 32GB SD card included only)
- Range can be as far as 120M providing a significant long distance and stable signal
- G-force sensor
- Waterproof camera (IP68) and monitor (IP65)
- Inputs for up to 4 cameras



Built-in DVR



Password protected & built-in lock

PART NO.	DESCRIPTION	QTY
0-775-59	Wireless CCTV kit with built-in DVR + 4 cameras	1
0-775-61	Wireless CCTV kit with built-in DVR + 1 camera	1

Specially designed for commercial & construction vehicles.


COMPLIANT KITS

DVS, FORS, CLOCS



BASIC REQUIREMENT TO BECOME COMPLIANT;

Complete vehicle safety kits to comply with FORS, CLOCS & DVS.

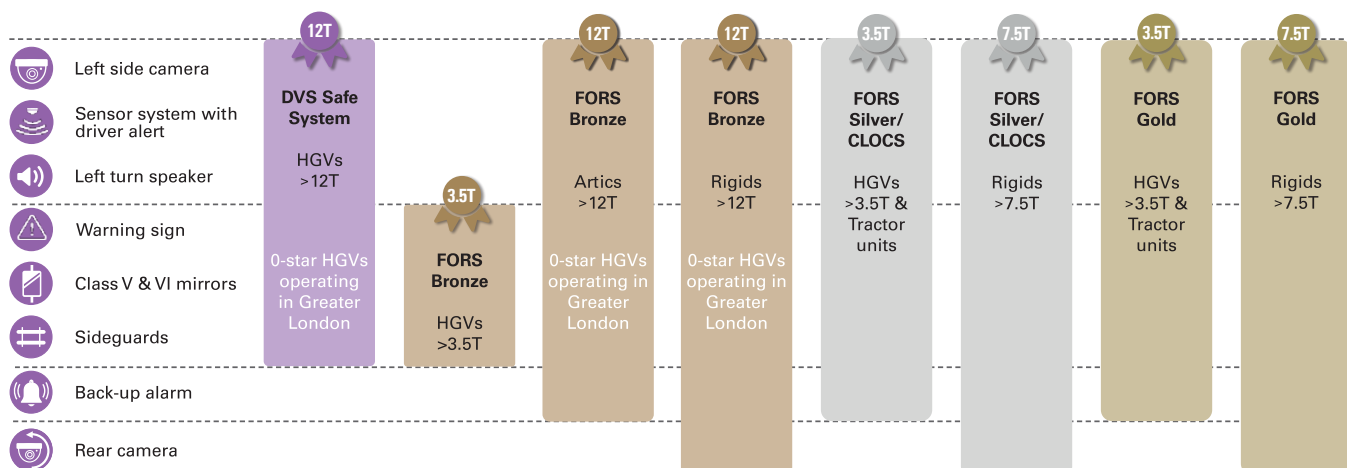

Unsure on what you require? Contact Durite today or take a look at our online blog for more on the DVS & FORS requirements.

*FORS Silver equipment will ensure you are CLOCS compliant.

DIRECT VISION STANDARD (DVS)

The Direct Vision Standard (DVS) is a **new Safety Legislation** from Transport for London. Its aim is to reduce the **fatality and accident rates** for pedestrians & cyclists caused by HGVs.

HGVs over 12T will need a Safety Permit to enter Greater London.

Durite DVS Safe Systems can help you on your journey to becoming compliant. See page 29 for FAQ.



N.B image shows kit 4-776-65.

DVS SAFE SYSTEM

A Safe System is a series of safety measures retrofitted to a vehicle. Durite DVS Safe Systems include near side camera, sensors, left turn speaker and warning sign.

Durite offers an "All-in-one" DVS Safe systems

- Comes with 2-year warranty
- Installation services are also available



Best-in-class
quality kit

E-Marked

Enforcement started
1st March 2021

PART NO.	DESCRIPTION	QTY
4-776-60	Safe system	1
4-776-65	Safe system with low speed trigger	1
4-776-58	Safe system with integrated GPS speed trigger	1
4-776-70	Safe system with low speed trigger for left hand drive vehicles	1

⚠ **Already have an in-cab monitor?**
We supply adaptors for all main OEs.
See page 41 for CCTV adaptors.

You will also need a sideguard and mirrors to ensure full compliance with the DVS & FORS requirements. See page 28 for mirrors.

CCTV KITS & VEHICLE SAFETY COMPLIANT KITS

FORS & CLOCS

Durite are a FORS Associate Supplier, bringing you the latest technology and highest quality components in vehicle safety.

All FORS Vehicle Safety Kits come with;

- 2-year warranty as standard
- High definition quality for both day & night vision
- Installation services available

FORS COMPLIANT KIT

Minimum requirement to comply with FORS

- 1 In-cab display screen
- 2 Side/Rear camera (rear for Rigid >7.5T)
- 3 Close proximity sensors & driver audible alert
- 4 Warning sign
- 5 Reversing & Left-turn alarms



FORS VEHICLE SAFETY KITS

VEHICLE SAFETY KITS TO COMPLY

FORS BRONZE



VEHICLE TYPE	PART NO.
Artics over 12T	4-776-55
Rigids over 12T*	4-776-56

FORS SILVER



VEHICLE TYPE	PART NO.
HGVs 3.5T to 7.5T	4-776-55
Rigids over 7.5T*	4-776-56
Artics & Tractor units	4-776-55

FORS GOLD



VEHICLE TYPE	PART NO.
HGVs 3.5T to 7.5T	4-776-55
Rigids over 7.5T*	4-776-56
Artics & Tractor units	4-776-55

*Includes rear camera.

For FORS BRONZE, Vehicles under 12T only need Class V & VI mirrors, warning sign and sideguards.

FORS, CLOCS & DVS COMPLIANT KITS WITH DIGITAL VIDEO RECORDER

Help your drivers manoeuvre more safely, protect your assets and capture crystal clear evidence.

- 2-year warranty as standard
- High definition quality for both day & night vision
- Installation services available

DVR KIT

Also includes;

- 6 Forward & Offside cameras
- 7 DVR



	RIGIDS	ARTICULATED VEHICLES	QTY
SD Card DVR Kits (32GB)	4-776-51	4-776-53	1
Hard Drive DVR Kits (1TB)	4-776-52	4-776-54	1
4G Live Streaming Hard Drive DVR Kit (1TB)*	0-774-26	0-774-27	1

*12-month subscription required to access the Durite Live portal (0-876-99).

NEW

Still unsure?
Contact us for more information.

CCTV MONITORING KITS

OUR MOST POPULAR KITS



0-776-66
7" CCTV KIT
see below



0-776-75
5" 3-CH CCTV KIT
see page 16



0-775-39
7" 2-CH WIRELESS KIT
see page 18



0-775-47
2-CH MIRROR MONITOR KIT
see page 17

7" CAMERA MONITORING KITS

7" 2-CHANNEL CCTV KIT, FAN BRACKET

12/24V



Great Value



2-Channel Reversing Camera System, includes 7" TFT LCD monitor & 1 rear view 1/3" Sony CCD camera.

- High resolution monitor and bracket is suitable for most cabins while the shielded cable ensures robust installation on all truck sizes and industrial vehicles
- Camera protected to IP68
- Supplied with remote control & 20m cable, (additional 5m lead on 2-camera kits)
- 1 additional camera can be used

2-CHANNEL 7" CCTV KIT & 1 CAMERA

PART NO.	DESCRIPTION	QTY
0-776-66	7" standard image CCTV kit	1
0-776-67	7" mirror image CCTV kit	1



2-CHANNEL 7" CCTV KIT & 2 CAMERAS

PART NO.	DESCRIPTION	QTY
0-775-56	7" monitor & 2 cameras standard image	1
0-775-57	7" monitor & 2 cameras mirror image	1

7" 2-CHANNEL CCTV KIT, U-SHAPE BRACKET

LOOKING FOR A KIT WITH A U-SHAPE BRACKET & FAN BRACKET?



- ✓ 12/24V
- ✓ 7" TFT-LCD monitor
- ✓ 1 rear view Sony CCD Camera
- ✓ U-shape steel bracket & fan bracket
- ✓ Camera protected to IP68
- ✓ Supplied with 20m cable

PART NO.	DESCRIPTION	QTY
0-775-51	7" 2-channel CCTV Kit	1

FORS & DVS COMPLIANCE

Durite are a FORS Associate Supplier. We supply a range of simple all-in-one kits to help you comply with FORS and DVS (Direct Vision Standard from Transport for London).

See pages 12–13 for more information.





LOOKING FOR A MONITOR BRACKET? *see page 39 for full range.*

7" 3-CHANNEL CCTV KIT

12/24V



3-Channel CCTV kit - 12/24V.

Durite 3-Channel reversing camera system, includes 7" TFT-LCD 3-channel monitor & 1 x rear view Sony 1/3" CCD Camera.

- Camera protected to IP68
- Supplied with 20m cable

PART NO.	DESCRIPTION	QTY
0-775-68	7" 3-channel CCTV kit	1

7" 3-CHANNEL 720P HD CCTV KIT

12/24V



HD

HD CCTV Kit

3-Channel high definition CCTV kit - 12/24V.

3-Channel reversing camera system includes 7" TFT LCD monitor & rear view 720p HD camera.

- High definition
- Supplied with 20m cable
- Camera protected to IP68

PART NO.	DESCRIPTION	QTY
0-776-72	HD 7" 3-channel CCTV kit	1

7" 4-CHANNEL CCTV KITS

12/24V

4-Channel CCTV kit with 1 or 4 cameras - 12/24V.

7" QUAD monitor allows up to 4 images to be displayed simultaneously, for a comprehensive view of blind spots.

- Up to 4 triggers
- Infrared cameras for day and night vision
- Single camera kit includes 1 monitor (7"), 1 x rear camera, 1 x 20m, sunshade, U-shape bracket (plus 1 x forward-facing camera & 2 x side cameras for 4 camera kit)



1-CAMERA KIT

PART NO.	DESCRIPTION	QTY
0-775-34	7" QUAD CCTV kit with 1 camera	1



4 channels



Infrared Cameras

4-CAMERA KIT

PART NO.	DESCRIPTION	QTY
0-775-66	7" QUAD CCTV kit with 4 cameras	1
0-775-67	7" QUAD CCTV kit with 4 cameras - mirror image	1

5" CAMERA SYSTEM

5" 3-CHANNEL CCTV KIT



12/24V

3-Channel CCTV 5" TFT infrared with sound

- 3-channel reversing camera system
- Suitable for 12/24V applications
- Supplied with 1 x 5" colour TFT-LCD monitor, 1 x rear view Sony CCD camera and 1 x 20m cable



3 Camera inputs



5" monitor

PART NO.	DESCRIPTION	QTY
0-776-75	5" 3-channel CCTV kit	1

9" CAMERA SYSTEM

9" 2-CHANNEL CCTV KIT



12/24V

2-Channel CCTV kit - 12/24V

Durite 2-Channel reversing camera system, includes 9" TFT-LCD 2-channel monitor & 1 x rear view Sony 1/3" CCD Camera.

- Camera protected to IP68
- Supplied with 20m cable



2 Camera inputs



9" monitor


🔧 9" monitors are recommended by FORS.

PART NO.	DESCRIPTION	QTY
0-775-30	9" 2-channel CCTV Kit	1

LOOKING FOR A SPECIALIST CAMERA SYSTEM FOR AGRICULTURE VEHICLES?

- ✓ Wireless 7" 4 monitors & 1 camera
- ✓ Monitors receive signal from 1 camera
- ✓ Built-in DVR

Contact us for more information 0-775-05.

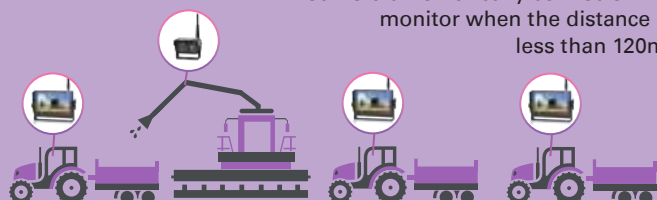

Camera automatically connects with monitor when the distance is less than 120m.

WANT YOUR CCTV KIT TO RECORD?

See our range of CCTV kits with integrated DVRs on page 11 for more information.



Built-in DVR

CCTV KITS & VEHICLE SAFETY CCTV MONITORING KITS WIRELESS CAMERA SYSTEMS

VAN CAMERA SYSTEMS

BRAKE LIGHT CAMERA CCTV KITS

12/24V

IP68

Monitor and brake light camera kits

- 7" monitor
- Camera protected to IP68
- Comes with 10m lead

PART NO.	DESCRIPTION	QTY
0-099-40	With 7" Monitor	1
0-099-45	With 7" Mirror Monitor	1



7" monitor



7" mirror monitor



Universal

2-CHANNEL REAR VIEW MIRROR MONITOR CCTV KITS

12/24V

IP68

7" TFT-LCD mirror monitor & 1 camera - 12/24V

- 1/3" Sony CCD image sensor camera
- Camera protected to IP68

PART NO.	DESCRIPTION	QTY
0-775-47	Monitor & 1 camera	1
0-776-49	Mirror monitor bracket	1



NUMBER PLATE CAMERA CCTV KITS

12/24V

IP68

25cm number plate camera, 7" monitor kit - 12/24V

- CMOS image sensor
- Supplied with 20m cable

PART NO.	DESCRIPTION	QTY
0-775-17	With 7" monitor	1
0-775-27	With 7" Mirror monitor	1



7" monitor



7" mirror monitor

HIGH DEFINITION NUMBER PLATE CAMERA KITS

12/24V

IP68

720p or 1080p AHD number plate camera with 7" monitor

- CMOS image sensor
- Camera protected to IP68

PART NO.	DESCRIPTION	QTY
0-774-72	720p HD Kit - 180mm	1
0-774-73	1080p FHD Kit - 200mm	1

NEW



WIRELESS CAMERA SYSTEMS

4.3" 1-CHANNEL WIRELESS CCTV KIT

12/24V

IP68

NEW



4.3" monitor

4.3" 1-Channel wireless TFT-LCD monitor & 1 camera

- Can receive signal from 1 camera
- Supplied with 1 x 4.3" screen monitor and 1 x rear view camera
- Camera protected to IP68
- Wireless transmitting range of up to 100m

PART NO.	DESCRIPTION	QTY
0-776-43	4.3" wireless CCTV kit	1

5" 2-CHANNEL WIRELESS CCTV KIT

12/24V

IP68



5" monitor

5" 2-Channel wireless TFT-LCD monitor & 1 camera

- Can receive signal from up to 2 cameras
- Supplied with 1 x 5" screen monitor and 1 x rear view camera only. Additional cameras can be purchased (0-775-29 & 0-775-63)
- Camera protected to IP68
- Wireless transmitting range of up to 120m

PART NO.	DESCRIPTION	QTY
0-775-41	5" wireless CCTV kit	1

7" 2-CHANNEL WIRELESS CCTV KIT

12/24V

IP68



7" monitor

Split screen

7" 2-Channel wireless TFT-LCD monitor & 1 camera

- Can receive signal from up to 2 cameras
- Supplied with 1 x 7" split screen monitor and 1 x rear view camera only. Additional cameras can be purchased (0-775-29 & 0-775-63)
- Camera protected to IP68
- Built-in wireless receiver with a range of 120m

PART NO.	DESCRIPTION	QTY
0-775-39	7" wireless CCTV Kit	1

7" QUAD 4-CHANNEL WIRELESS CCTV KIT

12/24V

IP68



Split screen

4 Camera inputs

7" QUAD 4-Channel wireless TFT-LCD monitor & 1 camera

- Can receive signal from up to 4 cameras
- Supplied with 1 x 7" split screen monitor and 1 x rear view camera only. Additional cameras can be purchased (0-775-29 & 0-775-63)
- Camera protected to IP68
- Wireless transmitting range of up to 120m

PART NO.	DESCRIPTION	QTY
0-775-01	7" wireless CCTV Kit	1



LOOKING FOR A RECHARGEABLE MAGNETIC WIRELESS CAMERA WITH TRANSMITTER & RECEIVER? See page 39.



“

Follow your fleet on a map.
Get real-time notifications
in case of an incident.

”



DASH CAMERAS

4G FULL HD CAM

WITH INTEGRAL DVR, WIFI,
G-FORCE SENSOR & GPS



4G Connectivity
to access the Durite
Live portal



Tamper-proof data
secured to the CLOUD



HD resolution
Crystal clear
evidence



Live location
& GPS journey

**4G TECHNOLOGY ALLOWS YOU TO LIVE STREAM VIDEOS AND ACCESS
INCIDENT DATA & REPORTS REMOTELY.**

Built-in WiFi
enables quick setup
& connection to your
phone.



1 or 2 cameras.

BENEFITS

- View footage & provide evidence in case of an incident
- Comprehensive report including exact location & speed
- Downloadable footage for quick claim settlement
- Automatically locks recording
- Instant & scheduled alerts and reports
- Integrates with DuriteTelematics & Durite Live

KEY FEATURES

- 1080p Full HD IP camera
- 4G, GPS, WiFi & G-force sensor
- Infrared LEDs for night vision (second camera only)
- Records onto 128GB SD card (SD card included)

PART NO.	DESCRIPTION	QTY
0-876-08	4G Full HD camera	1
0-876-09	4G Full HD camera & 1 camera	1



INTEGRATES WITH DURITE LIVE*

Remotely live stream, receive alerts and download incident footage from any device.

*12-month subscription required to access the Durite Live portal.

1080P FULL HD DASH CAM WITH SAFE LOCK TO PROTECT SD CARD

12/24V

**Rotatable dash camera with built-in GPS. Stores camera video
onto 128GB micro SD card. (SD card not included).**

- 360° rotatable dash camera
- Wide 170° view angle
- Built-in G-force sensor, GPS & WiFi
- Parking monitor
- AV/HDMI out and hard wire cable

PART NO.	DESCRIPTION	QTY
0-775-70	Safe lock dash camera	1



Tamper proof locked SD card.

**7.5hrs recording time when
camera is set to highest resolution.**



Rotation



**Built-in
WiFi**



**Keep data
secure with
Safe Lock**



LOOKING FOR TAMPER SEALS? Order 0-776-63.

1080P FULL HD DASH CAMERA WITH GPS



4hrs recording time when camera is set to highest resolution.

12/24V

Mobile Digital Video Recorder, 12/24V, stores camera video onto 32GB micro SD (not included).

- Full HD real time recording
- Built-in G-force sensor and GPS
- Motion detection / theft prevention
- Speed monitoring
- Comes with USB cable, 12/24V cigarette cable/plug

PART NO.	DESCRIPTION	QTY
0-776-60	Full HD dash camera	1
0-776-61	Cigarette plug charger	1



Built-in GPS & G-sensor



1080p Full HD

1080P FULL HD 2.0" MINI DASH CAMERA



7.5hrs recording time when camera is set to highest resolution.

12/24V

Mini dash camera with 2.0" screen. Stores camera video onto 64GB micro SD (not included).

- 1080p Full HD real time recording
- Built-in G-force sensor
- Motion detection / theft prevention
- Large depth of field with 170° wide angle lens

PART NO.	DESCRIPTION	QTY
0-775-45	Full HD mini dash camera	1
4-775-94	Cigarette plug charger	1



1080p Full HD



Extra wide viewing angle



Small & compact

4K ULTRA HD DASH CAM WITH WIFI FOR EASY DOWNLOAD



1 or 2 cameras.

11hrs recording time single camera model at highest resolution.

12/24V

4K dash camera with 2.0" screen. Stores camera video onto 128GB micro SD card (not included).

- 4K resolution real time recording
- Built-in G-force sensor and GPS
- Motion detection
- WiFi to stream files
- Large depth of field with 170° wide angle lens

PART NO.	DESCRIPTION	QTY
0-775-53	4K dash camera	1
0-775-44	4K dash camera + 1 camera	1



4K ultra HD



Built-in G-sensor



Extra wide viewing angle



TELEMATICS

Monitor driving habits and improve the safety of your drivers and other road users.
Track harsh braking, acceleration, hard cornering and speeding.



Improve driving habits



Fewer speeding incidents



Cheaper insurance premiums




Fuel cost saving

SMART NANO TELEMATICS TRACKER

The Durite smart nano tracker features a 2-wire fixing for an easy and secure installation, reducing the risk of removal. Complimented with Bluetooth connectivity and an internal backup battery, the Durite smart tracker does not conflict with any existing telemetry solutions already in-situ.

- Solid waterproof case
- Built-in accelerometer & gyroscope sensors to provide highly accurate crash data
- Integrates with Durite Telematics to provide detailed driver behaviour, location and journey data for analysis
- Easy data access on the Fleet Dashboard
- Data is secured to the Cloud

PART NO.	DESCRIPTION	QTY
0-875-60	Smart nano telematics tracker	1



 Easy and secure installation.

TELEMATICS TRACKER WITH IMMOBILISER

Suitable for a wide range of vehicles, plant & fleet vehicle & applications. The immobiliser will prevent the engine from restarting.

- This device features extra sensitive GPS to provide accurate location of 2.0m & speed information while the GPRS/GSM transmits live and scheduled telematics reporting and alerts

PART NO.	DESCRIPTION	QTY
0-875-01	For mainland UK	1
0-875-11	For Northern Ireland & Republic of Ireland	1



TELEMATICS TRACKER WITHOUT IMMOBILISER

Suitable for installation on a range of vehicles and plant machinery.

- This device features G-sensor (ideal for accurate driver profiling and crash notifications)
- Inputs for temperature monitoring or Driver ID
- Includes high sensitivity GPS with location accuracy of 2.5m



PART NO.	DESCRIPTION	QTY
0-875-08	For mainland UK	1
0-875-18	For Northern Ireland & Republic of Ireland	1

TRAILER TRACKER

The Durite trailer tracker is designed for the tracking of trailer units.

- Trailers can be left for prolonged periods of time without power & easily found with the 6-month backup battery
- Recharged quickly from any 12V/24V power supply, and has 3 inputs and 3 outputs allowing remote control of hardware such as door locks & temperature sensors



PART NO.	DESCRIPTION	QTY
0-875-02	For mainland UK	1
0-875-12	For Northern Ireland & Republic of Ireland	1

BLIND SPOT SYSTEMS

BLIND SPOT DETECTION SYSTEMS

DESIGNED FOR HGVS AND TRACTOR UNITS

- Warn cyclists and pedestrians with external speaking alarm
- Integrates with Durite CCTV Kits
- Record on Durite mobile DVR if fitted
- Compliant with CLOCS, FORS, DVS and construction companies who require commercial vehicles to meet specific safety specifications
- ECE, EMC R10 approval



4 LEFT SENSORS

4, 8 OR 12 BLIND SPOT SENSOR KITS

12/24V

IP68



- For 12/24V vehicles
- Adjustable sensor sensitivity reduces false detection between 0.9m to 1.8m
- Includes ultrasonic sensors, internal buzzer & external speaker
- Operates on GPS speed trigger reducing installation time. Select maximum speed at which you want obstacles to be detected

DESCRIPTION		RIGID	ARTICS ADD CABLE	QTY
4 Sensor Kit	4 left sensors	0-870-10	0-870-95	1
8 Sensor Kit	4 left & 4 rear sensors	0-870-40	0-870-95	1
12 Sensor Kit	4 left, 4 rear & 4 right sensors	0-870-45	0-870-95	1

PART NO.	DESCRIPTION	QTY
0-870-95	3.5m side detection retractable cable	1
0-870-91	2m extension cable to sensor	1
0-870-90	3-pin connector extension cable	1

🔧 For spare components go to related items tab for 0-870-10 on our website.



Left turn
speaker



Built-in GPS
speed trigger



Detects
objects as far
as 1.8m



Ultrasonic
sensors
Up to 12



If an object is detected the screen display shows the location along the vehicle, the in-cab buzzer sounds and the external speaker alerts the pedestrians and cyclists.



4 RIGHT SENSORS



4 REAR SENSORS

“ 4 (left), 8 (left & rear) or 12 (left, rear, right) sensor kits available. ”

CCTV KITS & VEHICLE SAFETY BLIND SPOT SYSTEMS

ULTRASONIC NEAR SIDE BLIND SPOT SENSOR KITS

12/24V

IP69K

- Visual & audible warnings with LED traffic light warning buzzer
- Detection within 0.2 seconds up to 1.5M
- ECU protected to IP69K, sensor & connector protected to IP68
- Shock & vibration resistant
- Environment learning mode
- System self-checking function
- Flush (0°), 11° & underslung mounting available

PART NO.	DESCRIPTION	QTY
0-870-30	Side sensor kit	1
0-870-35	Side sensor kit with left turn speaker	1
0-870-36	Side sensor kit with left turn speaker and low speed trigger	1

PART NO.	DESCRIPTION	QTY
0-870-34	4.5m 2-pin extension lead between sensors	1
0-870-32	2.5m 2-pin extension lead between sensors	1

🔧 For spare components go to related items tab for 0-870-30 on our website.



Detection
up to 1.5m



System
self-checking
function



System Self-Checking Function
checks all the sensors when
switched on, indicating with a
beep sound if a sensor is faulty.

ULTRASONIC REAR BLIND SPOT SENSOR KIT

12/24V

IP69K

- Visual & audible warnings with LED warning buzzer
- Detection within 0.2 seconds up to 2.2M
- ECU protected to IP69K, sensor & connector protected to IP68
- Shock & vibration resistant
- Environment learning mode
- System self-checking function

PART NO.	DESCRIPTION	QTY
0-870-05	Reversing 4-sensor kit	1



Detection
up to 2.2m



System
self-checking
function



CANBUS CONNECTOR MODULE



An external adapter which connects directly to CANHIGH & CANLOW. Outputs the following signals: left indicator, right indicator & reverse. The unit then outputs a live speed signal (cuts out at 15mph).

- Multifunctional status LED
- Flexible firmware allows for continuous updates

🔧 Works with our DVS Safe System 4-776-60 & Blind Spot Detection System 0-870-30.

PART NO.	DESCRIPTION	QTY
0-774-50	Canbus connector module	1
0-774-51	Contactless reader	1

LOW SPEED TRIGGER MODULE

12/24V



Durite 3-in-1 Low Speed and Indicator Trigger Module is suitable for a variety of applications such as controlling side camera, warning alarm or blind spot detection system. It has 3 functions; Speed Controlled only, Indicator Triggered only or Speed & Indicator operation.

- E-Marked R10.05 EMC
- 8 speed settings up to 60MPH

🔧 Works with our DVS Safe System 4-776-60 & Blind Spot Detection System 0-870-30.

PART NO.	DESCRIPTION	QTY
0-774-55	Low speed trigger module	1

DURITE 360° 3D CAMERA SYSTEM



360° bird's-eye view
4 ultra-wide camera angles
knit together to create a
virtual 360° bird's-eye view
of your vehicle.



Supports
4 AHD cameras



Make manoeuvres
safer & easier



Fast calibration

SEAMLESS 360° BIRD'S-EYE VIEW OF YOUR VEHICLE & THE AREA AROUND IT

- 360° view monitoring system provides high resolution images captured on 4 AHD cameras
- 3D system moves the virtual camera position around the vehicle for a better view when manoeuvring
- User-tailored screen setup such as split screen output to display specific cameras when reversing or indicating
- The 'plug-and-play' system will connect into Durite DVRs to allow the recording of images from all cameras

FEATURES

- 12/24V
- Waterproof to IP68
- Real-time 360° view
- 4 AHD cameras with ultra-wide angle
- Supplied with GPS module, ECU control box and cables

BENEFITS

- Comprehensive view of the surrounding area in a single image
- Eliminates blind spots, improves safety
- Helps reduce risk of collisions
- Danger areas are identified and prioritised on the display



720P AHD monitor

VIEW WHEN TURNING LEFT:



VIEW WHEN TURNING RIGHT:



VIEW WHEN GOING FORWARD:



VIEW WHEN REVERSING:



PART NO.	DESCRIPTION	QTY
0-870-20	360° Camera system (no monitor)	1
0-870-25	360° Camera system with 720p AHD monitor	1
0-870-98	360° Camera. 1/3" CMOS	1
0-870-97	Calibration mats	4

REVERSING & WARNING ALARMS

MULTI-FREQUENCY BACK UP ALARMS

MULTI-FREQUENCY ALARM, 92DB

Multi-frequency Alarm used to warn pedestrians when the vehicle is reversing, 9-32V.

- Multi-frequency alarm
- 92dB +/-4dB
- Protected to IP68
- 10G Mechanical vibration
- Robust ABS material
- L 104 x W 37 x H 62mm
- E-Marked EMC R10

NEW



PART NO.	DESCRIPTION	QTY
0-564-21	Multi-frequency alarm	1

MULTI-FREQUENCY 87DB

Multi-frequency, 12-24V.

- Multi frequency alarm
- 87dB(A), 4000Hz
- Epoxy potted against dust, moisture and vibration
- L 102 x W 70 x H 41mm
- E-Marked EMC R10



PART NO.	DESCRIPTION	QTY
0-564-11	12V/24V	1

DOUBLE ENGAGE & NIGHT SILENT ALARM, 97DB

Multi-frequency Alarm used to warn pedestrians when the vehicle is reversing, 9-32V.

- Double engage and night silent alarm
- 97dB +/-4dB to 87dB +/-4dB / 0dB
- Protected to IP68
- 10G Mechanical vibration
- Robust ABS material
- L 104 x W 37 x H 62mm
- E-Marked EMC R10

NEW




PART NO.	DESCRIPTION	QTY
0-564-13	Multi-frequency alarm	1

SELF ADJUSTING BACK-UP ALARM

Self Adjusting Alarm used to warn pedestrians when the vehicle is reversing, 9-32V.

- Multi-frequency alarm (sh...sh...)
- Automatically adjust 5-10dB above ambient noise
- Protected to IP68
- 10G Mechanical vibration
- Robust ABS material
- L 104 x W 75 x H 39mm
- E-Marked EMC R10

NEW



PART NO.	DESCRIPTION	QTY
0-564-12	Multi-frequency alarm	1

INTERMITTENT BACK UP ALARM

GREAT VALUE 105DB

Intermittent sound, 12 or 24V.

- Intermittent sound
- 105dB(A)
- One hole fixing bracket
- Ø 54.3 x D 41mm
- CE approved

DESCRIPTION	PART NO.	NIGHT SILENT	QTY
12V	0-561-12	0-561-62	1
24V	0-561-24	0-561-74	1



CCTV KITS & VEHICLE SAFETY BACK UP ALARMS

TONAL BACK UP ALARMS

STANDARD 97DB

**Standard, 12-48V.**

- 60 pulses per minute
- 97dB(A), 1200Hz
- Protected against water spray
- M4 stud terminals
- L 102 x W 70 x H 41mm
- CE approved

PART NO.	DESCRIPTION	QTY
0-564-02	12V-48V	1

HEAVY-DUTY 97DB

**Heavy-Duty, 12-48V.**

- 60 pulses per minute
- 97dB(A), 1200Hz
- Polarity protected solid state epoxy-potted electronics
- Steam-cleanable
- CE approved

PART NO.	DESCRIPTION	QTY
0-564-00	12V-48V with terminal bolts	1
0-564-01	12V-24V with flying leads	1
0-564-06	12V-24V with Night Silent	1

NEW

EXTRA HEAVY-DUTY 112DB

**Heavy-Duty, 12/24V.**

- 60 pulses per minute
- 112dB(A), 1200Hz
- Epoxy potted against dust, moisture and vibration
- Protected to IP66
- L 127 x W 95 x H 77mm
- CE, EMC R10

PART NO.	DESCRIPTION	QTY
0-564-25	12V/24V	1

SELF ADJUSTING BACK-UP ALARM

**Self Adjusting Alarm used to warn pedestrians when the vehicle is reversing.**

- Tonal alarm (beep...beep)
- Automatically adjust 5-10dB above ambient noise
- Protected to IP68
- 10G mechanical vibration
- Robust ABS material
- L 104 x W 75 x H 39mm
- E-Marked EMC R10

NEW

PART NO.	DESCRIPTION	QTY
0-564-03	Tonal alarm (beep..beep)	1

REVERSING & WARNING SPEAKERS

LEFT TURN, REVERSING OR RIGHT TURN SPEAKERS, 97DB

12/24V

IP66

R10



Used to warn pedestrians when the vehicle is indicating left, right or reversing.

- Waterproof to IP66
- At 97 dB it is loud enough to be heard over moving traffic
- E-Marked, R10 approved
- H 80.30 x W 100.00 x D 73mm

PART NO.	DESCRIPTION	QTY
0-564-60	"This vehicle is turning left"	1
0-564-70	"This vehicle is reversing"	1
0-564-80	"This vehicle is turning right"	1

CCTV KITS & VEHICLE SAFETY BACK UP ALARMS

LEFT TURN SPEAKER, 90DB

"Sh. Sh. Caution, vehicle turning left", 9-32V

- Left turn speaker
- At 90dB is loud enough to be heard over moving traffic
- Protected to IP68
- Robust ABS material
- L 104 x W 75 x H 39mm
- E-Marked R10 EMC



PART NO.	DESCRIPTION	QTY
0-564-62	"Caution, vehicle turning left"	1

USB PROGRAMMABLE SPEAKER

Record your own warning message to the Durite USB Programmable alarm, 12/24V.

NEW

- USB programmable alarm (6W)
- Supports MP3/WAV files up to 4MB
- 0-90dB
- Protected to IP68
- Robust ABS material
- L 104 x W 39 x H 75mm
- E-Marked EMC R10



PART NO.	DESCRIPTION	QTY
0-564-75	Programmable speaker	1

MULTI-FUNCTION ALARM

Multi-function, 9-32V

- Left, rear, mute, night silent, double engage reverse, 1/2 sound & output trigger
- 90dB, 70dB night, 0db mute
- Protected to IP68
- Robust ABS material
- L 104 x W 75 x H 39mm
- E-Marked R10 EMC



PART NO.	DESCRIPTION	QTY
0-564-55	"This vehicle is reversing" & "This vehicle is turning left"	1

BUZZERS

WARNING LIGHTS-ON

12V negative earth systems

- Two tone warning alarm if the drivers door is opened when the vehicle lights are on and the ignition is switched off



PART NO.	DESCRIPTION	QTY
0-562-00	12V	1

WARNING LOW PRESSURE

Warning buzzer

- Plastic body with one female and one male 6.35mm blade terminal



PART NO.	DESCRIPTION	QTY
0-562-12	12V Black	1
0-562-24	24V Red	1

WARNING IN CAB

Dashboard buzzer

- 2 tones
- 72 dB(A)
- Single hole fixing
- Two terminal



PART NO.	DESCRIPTION	QTY
0-562-62	12V	1
0-562-74	24V	1

MIRRORS

CLASS II



Commercial vehicle convex glass mirror head

- 362 x 174mm. Clamps to main mirror 16-28mm arms
- ECE approved, Class II

PART NO.	DESCRIPTION	QTY
0-771-00	362 x 174mm	1



Commercial vehicle flat glass mirror heads

- Clamps to 5/8" (13-16mm) arms
- ECE approved

PART NO.	DESCRIPTION	QTY
0-770-04	7" x 5" (177 x 127 mm)	4
0-771-04	10" x 6" (254 x 152 mm)	2

CLASS IV



Commercial vehicle wide angle glass mirror head (193 x 193mm)

- Clamps to 16-28mm arms
- ECE approved, Class IV

PART NO.	DESCRIPTION	QTY
0-770-00	193 x 193mm	1

CLASS V



Over door/kerbs mirror head (240 x 155mm)

- To EEC specification Class V
- Comes with mirror arm fitted with 2 x 6mm slots at 40-60mm

PART NO.	DESCRIPTION	QTY
0-770-07	240 x 155mm	1

CLASS VI



Over screen/front view mirror head (293 x 210mm)

- To EEC specification Class VI with unbreakable lens
- Comes with mirror arm 440mm long, 19mm diameter with clamp that fits 16-28mm diameter arms


PART NO.	DESCRIPTION	QTY
0-770-08	293 x 210mm	1



Over screen/front view circular mirror head (255mm diameter)

- To EEC specification class VI
- Comes with mirror arm 440mm long, 19mm diameter with clamp that fits 16-28mm diameter arms

PART NO.	DESCRIPTION	QTY
0-770-09	255m diameter	1

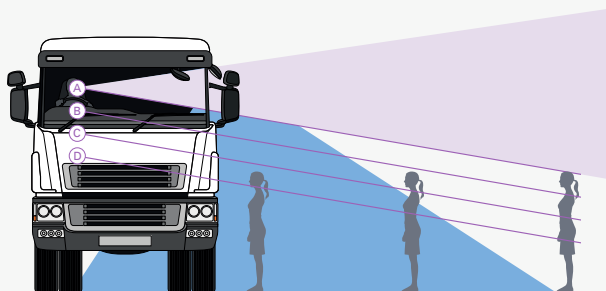

A - Zero Star | B - One Star | C - Three Stars | D - Five Stars

DVS

YOUR QUESTIONS ANSWERED

TRANSPORT FOR LONDON SAFETY LEGISLATION

WHAT IS DIRECT VISION STANDARD (DVS)?

The Direct Vision Standard is a new safety legislation from Transport for London.

Its aim is to reduce the fatality and accident rates for pedestrians & cyclists caused by HGVs.

HGVs over 12T require a Safety Permit to enter Greater London.

HOW DOES DVS WORK?



DVS measures a driver's vision through the windows of an HGV Cab.

A star rating system from zero (limited vision) to five (increased vision) is used to indicate the level of risk to people walking and cycling near the vehicle.

WHAT ARE THE CONDITIONS TO GET A PERMIT

One to Five star-rated vehicles will be granted permits. Zero star-rated vehicles will need an approved Safe System to be fitted to obtain a permit.

HOW DO I KNOW THE RATING OF MY VEHICLE

To know your vehicle's rating, contact your manufacturer with your chassis number.



DAF: ukwvta@daftrucks.com
DENNIS EAGLE: www.dennis-eagle.co.uk/USV
MAN: salesengineering@man.eu
RENAULT: DVS@renault-trucks.com
SCANIA: product.engineeringuk@scania.com
VOLVO: DVS@volvo.com
MERCEDES-BENZ: mbtrucks.product@daimler.com
IVECO: productengineering@iveco.com

WHERE CAN I GET MY PERMIT?

Operators can access the TfL permit application web portal. It is free to apply.

WHAT IF I DON'T HAVE A PERMIT?



HGVs entering Greater London without a safety permit will be fined up to £550 per day.

TfL have the right to suspend or dismiss a permit that has previously been granted to a vehicle if found to be in breach of the permit terms.

IF MY VEHICLE HAS ZERO STAR, WHAT IS A SAFE SYSTEM AND HOW DO I GET ONE FITTED TO MY VEHICLE?



A Safe System is a series of safety measures retrofitted to a vehicle. It includes near side camera, sensors, left turn speaker and warning sign.

Durite offers an "All-in-one" DVS Safe system (4-776-65) that comes with 2-year warranty. Installation services are also available if needed.



You will also need a sideguard and mirrors to ensure full compliance.

HOW LONG WILL MY PERMIT BE VALID FOR?



Zero star-rated vehicles with an approved Safe System will be granted a permit until 2024.

One and two star-rated vehicles will be granted permits until 2024.

Three, four and five star-rated vehicles will be granted a 10-year permit.

To apply for a permit or check vehicle star rating visit;
tfl.gov.uk/modes/driving/dvs-safety-permit-application

DVRs

*12-month subscription required to access the Durite Live portal (0-876-99).

Durite DVRs encourage better driver behaviour, reduce risk of accidents and help lower insurance premiums. Choose our 4G DVRs for live streaming vehicle cameras & monitoring vehicle location from any device. Record high-quality videos and play back anytime.

-  **HDD or SD card DVRs**
-  **Password protection & Lock cover**
-  **Options include; GPS, G-Force, WiFi for Data download, 4G for Live streaming**

720P HD 5-CHANNEL HARD DRIVE DVR



-  **720p**
HD Resolution
-  **5 camera**
inputs
-  **Compact**
design
-  **4G**
Live streaming available

12/24V

HD 5-Channel DVR with GPS

- Channels consist of 4 x 720p AHD & 1 x 1080p IP
- 4G version available for Live streaming with Durite Live
- The vibration-resistant & compact design of the DVR enables 360° mounting anywhere in the cabin
- 3-year warranty (DVR only)
- Comes with alarm cable & 1TB hard drive

 **Spare Caddy 0-876-28.**

DVR	4G DVR FOR LIVE STREAMING	DESCRIPTION	QTY
0-876-57	0-876-59	5-channel DVR	1
0-876-80	0-876-55	5-channel DVR without 1TB hard drive	1

1080P FULL HD 8-CHANNEL HARD DRIVE DVR

NEW



-  **1080p**
Full HD Resolution
-  **8 camera**
inputs
-  **4TB**
Hard Drive
-  **Built-in GPS & G-force**

12/24V

1080p Full HD 8-channel DVR with GPS & G-force Sensor

- Stores up to 8 camera videos onto 2 x 2TB Hard drive
- 12 alarm channel outputs & 8 trigger inputs for up to 8 cameras
- Lockable cover and password protected
- Built-in G-force sensor and GPS
- Motion detection/theft prevention
- Speed monitoring and warning
- Supplied with connecting cables and remote control

 **IR Jack, 3m lead 0-775-80.**

PART NO.	DESCRIPTION	QTY
4-776-81	8-channel 1080p HD mobile DVR	1

1080P HD 4-CHANNEL SD CARD DVR



-  **1080p**
HD Resolution
-  **4 camera**
inputs
-  **SD**
Card
-  **Built-in GPS & G-force**

12/24V

1080p HD 4-channel DVR with GPS & G-force sensor

- Stores up to 4 camera videos onto 2 x SD cards - 128GB each (1 x 32GB SD card included only)
- Lockable cover and password protected
- Motion detection/theft prevention
- Speed monitoring and warning
- Supplied with connecting cables and remote control
- 4 trigger inputs for up to 4 cameras

 **IR Jack, 3m lead 0-775-80.**


PART NO.	DESCRIPTION	QTY
0-776-80	4-channel 1080p HD mobile DVR	1

CCTV KITS & VEHICLE SAFETY DVRS



ONLY WANT A FORWARD FACING CAMERA?

NEW 4G forward facing camera with Integral DVR
View page 19 for more information >



4G

WANT AN EASIER INSTALLATION?

NEW Camera monitoring kit with Integral DVR
View page 11 for more information >



1080P FULL HD 5-CHANNEL SD CARD DVR WITH DURITE LIVE

12/24V

1080p Full HD 4G 5-channel DVR with Durite Live & GPS

- Channels consist of 4 x 1080p AHD & 1 x 1080p IP
- The GPS allows you to record your vehicle location & speed
- Durite Live portal to access footage anywhere, anytime
- Stores up to 5 camera videos onto 2 x SD cards - 256GB each (incl. 1 x 32GB SD card only)
- 3-year warranty (DVR only)
- Supplied with alarm cable

PART NO.	DESCRIPTION	QTY
0-876-35	5-channel 4G DVR	1

1080p	x5	SD	4G
Full HD Resolution	5 camera inputs	SD Card	Live streaming



720P AHD 6-CHANNEL HARD DRIVE DVR

12/24V

AHD 6-Channel DVR with GPS & G-force sensor

- Channels consist of 6 x 720p AHD
- SD card backup recording (SD card not included)
- 3-year warranty (DVR only)
- Comes with alarm cable & 1TB hard drive

PART NO.	DESCRIPTION	QTY
0-876-36	6-channel DVR	1

Built-in GPS & G-force	x6	1TB
Built-in GPS & G-force	6 camera inputs	Hard Drive



1080P FULL HD 8-CHANNEL HARD DRIVE DVR

12/24V

1080p Full HD 8-Channel DVR with GPS, G-force sensor & WiFi

- Channels consist of 8 x 1080p AHD
- 4G version available for Live streaming with Durite Live
- SD card backup recording (SD card not included)
- 3-year warranty (DVR only)
- Comes with alarm cable & 1TB hard drive

PART NO.	DESCRIPTION	QTY
0-876-68	8-channel DVR	1
0-876-07	8-channel 4G DVR	1

WiFi, GPS & G-force	x8	2TB	4G
WiFi, GPS & G-force	8 camera inputs	Up to 2TB Hard Drive	Live streaming available



CAMERAS

Reverse and manoeuvre more safely by reducing blind spots with Durite high-quality CCTV cameras.



Prevent collision & reduce vehicle damage



Perfect for both day & night vision



AHD cameras for crystal clear view of vehicle registrations



Waterproof



Wide view angle up to 150°



Dual voltage 12/24V

FORWARD FACING CAMERAS & DOME CAMERAS

AHD FORWARD FACING CAMERA



1080p or 720p AHD forward-facing camera

- CMOS image sensor
- 4mm lens
- Automatic gain control (AGC)
- Mounts directly to windscreen
- L 121.6 x W 75 x H 36mm

 4-pin aviation connector.

PART NO.	DESCRIPTION	QTY
0-876-17	720p HD camera	1
0-876-18	1080p Full HD camera	1

1080P FULL HD FORWARD FACING IP CAMERA



1080p Full HD IP forward-facing camera

- CMOS image sensor
- Audio
- Digital wide dynamic range (WDR) provides ultra clear images of vehicle registrations
- L 121.6 x W 75 x H 39mm
- Supplied with 5mtr ext cable

 IP connector.

PART NO.	DESCRIPTION	QTY
0-876-63	1080p IP camera	1

NEW

AHD FORWARD FACING CAMERA



1080p or 720p AHD Infrared forward facing camera

- CMOS image sensor
- Automatic gain control (AGC)
- Up to 130° viewing angle

Small & compact

PART NO.	DESCRIPTION	QTY
0-776-45	720p HD camera	1
0-775-11	1080p Full HD camera	1

SMALL AHD CAMERA



Small 720p AHD camera

- CMOS image sensor
- Small & compact
- Protected to IP67
- L 47 x W 40 x D 42mm

PART NO.	DESCRIPTION	QTY
0-775-37	720p HD camera	1

960H FORWARD FACING MICRO CAMERA



960H Infrared forward facing camera

- CMOS image sensor
- Automatic gain control (AGC)
- 4 infrared LEDs
- L 20 x W 41 x D 29mm

PART NO.	DESCRIPTION	QTY
0-776-15	960H Micro camera	1

720P HD DOME CAMERA



720p HD Infrared dome camera

- CMOS image sensor
- Automatic gain control (AGC)
- Protected to IP69K
- Ø 76 x D 43.95
- Compatible with all Durite DVRs

PART NO.	DESCRIPTION	QTY
0-776-06	720p HD dome camera	1

CCTV KITS & VEHICLE SAFETY CAMERAS



LOOKING FOR OUR RANGE OF WIRELESS CAMERAS & MONITORS? *See page 38 for more information.*



SIDE CAMERAS

COMPACT SIDE CAMERA

IP69K

6 or 5 Infrared LED side camera

- Supports normal/mirror image
- IP69K - resists pressure wash
- Automatic gain control (AGC)

PART NO.	DESCRIPTION	QTY
0-775-09	960H side camera	1
0-775-55	720p HD camera	1
0-775-12	1080p Full HD camera	1



N.B image shows 0-775-12

Extension bracket available, 0-775-46 (large), 0-775-43 (small).

SIDE CAMERA

IP69K

5 Infrared LED side camera

- CMOS image sensor
- Day/night sensor
- Up to 150° viewing angle
- Protected to IP69K
- L 42 x W 59 x H 74mm

PART NO.	DESCRIPTION	QTY
0-776-33	960H camera - standard & mirror image	1
0-776-52	720p HD camera - mirror image	1



720P HD WING MIRROR ARM CAMERA

720p HD Infrared wing mirror arm camera

- 1/3" CCD image sensor
- Automatic gain control (AGC)
- Fits Ø25-40mm wing mirror arms
- L 116.7-129.7 x W 74.6 x D 49.6mm

PART NO.	DESCRIPTION	QTY
0-776-56	720p HD side camera	1



CCTV KITS & VEHICLE SAFETY CAMERAS

REAR CAMERAS

AHD REAR CAMERA



Infrared rear AHD camera

- CMOS image sensor
- Automatic gain control (AGC)
- 18 infrared LEDs

PART NO.	DESCRIPTION	QTY
0-776-02	720p HD camera	1
0-775-13	1080p Full HD camera	1

960H REAR CAMERA



Infrared rear camera

- CCD image sensor
- Automatic gain control (AGC)
- 18 infrared LEDs

PART NO.	DESCRIPTION	QTY
0-776-70	960H camera - standard image	1
0-776-69	960H camera - mirror image	1

SMALL AHD CAMERA



Small 720p AHD camera

- CMOS image sensor
- Small & compact
- Protected to IP67
- L 47 x W 40 x D 42mm

PART NO.	DESCRIPTION	QTY
0-775-37	720p HD camera	1

MICRO NUMBER PLATE CAMERA



960H Micro Number plate camera

- CMOS image sensor
- Small & compact
- 1" square
- Protected to IP68
- L 23 x W 40 x D 23mm

PART NO.	DESCRIPTION	QTY
0-776-16	960H Micro NP camera	1

NUMBER PLATE CAMERA



960H Number plate 25cm camera

- CMOS image sensor
- Protected to IP68
- L 250 x D 23mm

PART NO.	DESCRIPTION	QTY
0-776-17	960H NP camera	1

UNIVERSAL BRAKE LIGHT CAMERA



960H Universal brake light camera

- CCD image sensor
- Night vision up to 35ft
- Comes with 10m lead
- Protected to IP68
- L 62.7 x W 211.7 x D 62mm

PART NO.	DESCRIPTION	QTY
0-099-15	Universal brake light camera	1

AHD NUMBER PLATE CAMERA



AHD Number plate camera

- CMOS image sensor
- 2.5mm lens
- 4-Pin aviation connector
- Protected to IP68
- E-Marked R10.05

PART NO.	DESCRIPTION	QTY
0-774-71	1080p - 200mm	1
0-774-70	720p - 180mm	1

FORD BRAKE LIGHT CAMERA

960H Ford brake light camera

- 12V
- Night vision LEDs
- Protected to IP68
- Supplied with 10m extension cable

PART NO.	DESCRIPTION	QTY
0-099-11	Transit 07-16	1
0-099-16	Custom 2018-20	1



MONITORS

Durite CCTV monitors are highly durable and reliable and are ideal for heavy-duty applications



9", 7" or 5" High resolution TFT-LCD screens



Dual voltage 12/24V



10G vibration rating



Fully interchangeable with other CCTV kits



Audio enabled



Robust construction

7" MONITORS

7" 2-CHANNEL MONITOR WITH FAN BRACKET

7" CCTV TFT LCD monitor

- Inputs for 2 cameras
- As used in 0-776-66 & 0-776-67 kits
- Fan bracket

PART NO.	DESCRIPTION	QTY
0-776-68	7" monitor	1



**Supports
up to 2
cameras**

7" 2-CHANNEL SPLIT SCREEN MONITOR

7" 2-channel split screen monitor

- Split screen monitors are recommended by FORS & DVS
- Supplied with Fan and U-shape brackets

PART NO.	DESCRIPTION	QTY
0-775-26	7" 2-channel split screen monitor	1



FORS & DVS



Split screen

CCTV KITS & VEHICLE SAFETY MONITORS


LOOKING FOR MONITOR BRACKETS? *See page 39*
7" 3-CHANNEL MONITOR

Supports up to 3 cameras
7" 3-channel TFT LCD CCTV monitor

- 3-channel inputs

PART NO.	DESCRIPTION	QTY
0-776-53	7" monitor	1

7" 1080P FHD 3-CHANNEL MONITOR

Can be used with Durite 360° system
7" AHD TFT LCD CCTV monitor

- 1080p full high definition
- 3-channel inputs
- 10G vibration rating

PART NO.	DESCRIPTION	QTY
0-776-73	AHD 7" monitor	1

7" 4-CHANNEL MONITOR

Supports up to 4 cameras
7" 4-channel TFT LCD CCTV monitor

- CCTV 7" colour monitor with inputs for up to 4 cameras
- Infrared with sound

PART NO.	DESCRIPTION	QTY
0-775-35	7" QUAD monitor	1

7" 4-CHANNEL MONITOR WITH BUILT-IN DVR
12/24V
7" HD 4-channel monitor with built-in SSD DVR

- 7" touchscreen monitor
- Inputs for up to 4 cameras
- GPS tracking and G-sensor
- Password protected & lock
- Impact rating 6G
- Built-in DVR records footage onto a 480GB SSD (additional storage 1 x SD card up to 256GB - not included)

PART NO.	DESCRIPTION	QTY
0-774-10	7" monitor with built-in DVR	1


4 camera inputs

GPS & G-sensor
5" MONITORS
5" 3-CHANNEL MONITOR
5" TFT LCD CCTV 3-channel monitor

- 5" monitor screen
- 3 channels for up to 3 cameras

PART NO.	DESCRIPTION	QTY
0-776-76	5" monitor	1


Supports up to 3 cameras

CCTV KITS & VEHICLE SAFETY MONITORS

9" MONITOR

9" 2-CHANNEL MONITOR

9" CCTV TFT LCD monitor

- Inputs for 2 cameras
- L 240 x W 170 x H 170mm

 9" monitors are recommended by FORS.

PART NO.	DESCRIPTION	QTY
0-775-31	9" monitor	1



Supports up to 2 cameras

9" 6-CHANNEL MONITOR WITH BUILT-IN DVR

12/24V

9" HD 6-channel monitor with built-in SSD DVR

- 9" touchscreen monitor
- Inputs for up to 6 cameras
- GPS tracking and G-sensor
- Password protected & lock
- Impact rating 6G
- Built-in DVR records footage onto a 480GB SSD (additional storage 2 x SD card up to 256GB - not included)

PART NO.	DESCRIPTION	QTY
0-775-54	9" monitor with built-in DVR	1



6 camera inputs



GPS & G-sensor

 9" monitors are recommended by FORS.

VAN MONITORS

7" 2-CHANNEL MIRROR MONITOR



7" 2-channel TFT LCD mirror monitor

- Compatible with rear view mirrors 63.2mm to 82mm high
- Shockproof rating of up to 8G

PART NO.	DESCRIPTION	QTY
0-775-48	Mirror monitor	1

SMART TOUCH SCREEN MONITOR

SMART 7" TOUCH SCREEN MONITOR



Supports up to 9 cameras



7" 9-channel touch screen monitor

- Playback video & view all cameras on one split screen
- Touch screen and connector cable to Durite DX & DL DVR (0-876-52)

PART NO.	DESCRIPTION	QTY
0-876-62	Touch Screen monitor	1
0-876-10	Touch Screen monitor & cable	1

WIRELESS MONITORS & CAMERAS

WIRELESS REAR CAMERA

Infrared rear mount wireless camera with microphone

- CMOS image sensor
- 18 infrared LEDs
- Protected to IP68
- 120m wireless range

🔧 Compatible with 0-775-39, 0-775-41 & 0-775-01 CCTV kits.



PART NO.	DESCRIPTION	QTY
0-775-29	Wireless rear camera standard image	1

WIRELESS 7" 4-CHANNEL MONITOR

7" Wireless TFT-LCD 4-channel monitor

- 4-channel 7" QUAD wireless monitor
- Can receive signal from up to 4 cameras
- Wireless transmission up to 120m

🔧 Compatible with 0-775-29, 0-775-63 cameras.



PART NO.	DESCRIPTION	QTY
0-775-02	Wireless 7" monitor	1

WIRELESS SIDE CAMERA

Infrared side mount wireless camera with microphone

- CMOS image sensor
- 12 infrared LEDs
- Protected to IP68
- 120m wireless range
- L 65.30 x W 75.90 x H 60mm

🔧 Compatible with 0-775-39, 0-775-41 & 0-775-01 CCTV kits.



PART NO.	DESCRIPTION	QTY
0-775-63	Wireless side camera standard image	1

WIRELESS 5" & 7" 2-CHANNEL MONITOR

5" or 7" wireless TFT-LCD 2-channel monitor

- 5" or 7" monitor screen
- 2 channels for up to 2 cameras

🔧 Compatible with 0-775-29, 0-775-63 cameras.



PART NO.	DESCRIPTION	QTY
0-775-42	5" 2-channel monitor	1
0-775-40	7" 2-channel monitor	1

WIRELESS REAR CAMERA

Infrared rear mount wireless camera with microphone

- CMOS image sensor
- 20 infrared LEDs
- Protected to IP68
- 120m wireless range

🔧 Compatible with 0-775-59 and 0-775-61 CCTV kit.



PART NO.	DESCRIPTION	QTY
0-775-60	Wireless rear camera standard image	1

WIRELESS 7" 4-CHANNEL MONITOR WITH BUILT-IN DVR

7" Wireless TFT-LCD 4-channel monitor & receiver

- 4-channel 7" QUAD wireless
- Password protected & lock
- Protected to IP65
- Built-in DVR records footage onto a SD card, up to 128GB SD card (1 x 32GB included)
- As used in 0-775-59 and 0-775-61 CCTV kit

🔧 Compatible with 0-775-60 camera.



PART NO.	DESCRIPTION	QTY
0-775-58	Wireless 7" monitor DVR	1

RECHARGEABLE WIRELESS MAGNETIC CAMERA

Wireless Li-ion magnetic reversing camera

Camera

- 1/3" CCD image sensor
- 120° viewing angle
- 8-LED infrared light, vision up to 8 meters
- 8600mAh battery can last up to 9 hours
- Protected to IP69K
- Wireless transmission up to 100m
- L 108 x W 80 x H 117.3mm
- E-Marked R10 EMC, CE, UKCA

Receiver

- 4-channel
- Signal transmission distance 100m
- 4-PIN aviation plug
- 2.4W
- Protected to IP67/IP69K
- Vibration impact 10G

 **Perfect for trailers.**



PART NO.	DESCRIPTION	QTY
0-774-80	Camera, transmitter & receiver	1
0-774-81	Receiver	1
0-774-82	Camera & transmitter	1

ACCESSORIES

BRACKETS

360° SWIVEL MONITOR BRACKET



4-bolt dual 360° bracket for all monitors

PART NO.	DESCRIPTION	QTY
0-776-74	Swivel bracket	1

360° SWIVEL MONITOR BRACKET



4-bolt dual 360° bracket for all monitors

PART NO.	DESCRIPTION	QTY
0-774-99	Swivel bracket	1

FAN BRACKET



Fan bracket suitable for all monitors

- 11mm slider
- Suitable for 4.3" - 9" monitors

PART NO.	DESCRIPTION	QTY
4-776-98	Fan bracket	1

CCTV KITS & VEHICLE SAFETY ACCESSORIES CABLES

CABLE

SCREENED CCTV LEADS



PART NO.	DESCRIPTION	QTY
0-775-21	1m CCTV lead	1
0-775-22	2m CCTV lead	1
0-775-23	3m CCTV lead	1
0-775-25	5m CCTV lead	1
0-775-10	10m CCTV lead	1
0-775-14	15m CCTV lead	1
0-775-19	20m CCTV lead	1

SUZI CABLE

**Suzi cable kit. Comprises:**

- 1 x Suzi cable 3.5m working length (0-776-96)
- 2 vehicle connectors (10m female end (0-776-94) & 0.3m male end for trailer (0-776-93))

PART NO.	DESCRIPTION	QTY
0-776-95	Complete kit	1
0-776-93	0.3 trailer socket (male)	1
0-776-94	10m tractor socket (female)	1
0-776-96	3.5m working length Suzi cable	1

3-CAMERA SUZI CABLE

**CCTV Heavy-duty retractable Suzi cable with connecting leads, 3.5m working length**

- Trailer socket end with 3 x male 4-pin connectors and truck end with 3 x female 4-pin connectors
- Protected to IP66
- Allows fitting of up to 3 cameras on a trailer through a single Suzi cable

PART NO.	DESCRIPTION	QTY
0-775-93	Complete kit	1
0-775-91	0.3m trailer socket (male)	1
0-775-92	0.3m tractor socket (female)	1
0-775-99	3.5m working length Suzi cable	1

HEAVY-DUTY SUZI CABLE - SCREW FIT



PART NO.	DESCRIPTION	QTY
4-776-87	Complete kit	1
0-775-97	3.5m trailer socket (male)	1
0-775-98	10m tractor socket (female)	1
4-775-96	3.5m working length Suzi cable	1

HEAVY-DUTY SUZI CABLE - PUSH FIT



PART NO.	DESCRIPTION	QTY
4-776-85	Complete kit	1
4-776-83	0.3m trailer socket (male)	1
4-776-84	10m tractor socket (female)	1
4-776-86	3m working length Suzi cable	1

CCTV KITS & VEHICLE SAFETY ACCESSORIES DVR ACCESSORIES & CCTV ADAPTORS

DVR ACCESSORIES

HARD DISK DRIVES

SATA 2.5" Hard Disk Drive

PART NO.	DESCRIPTION	QTY
0-776-79	1TB Hard Drive	1

SSD DRIVES

2.5" Solid State Drive SanDisk Ultra compatible with all Durite Hard Drive DVRs

PART NO.	DESCRIPTION	QTY
0-775-71	500GB SSD Drive	1
0-775-72	1TB SSD Drive	1

SD CARDS

Class 10 micro SD card

PART NO.	DESCRIPTION	QTY
0-775-03	256GB	1
0-775-28	128GB	1
0-775-64	64GB	1
0-775-32	32GB	1

DVR ADAPTORS

APPLICATION	ADAPTORS	PART NO.	QTY
DVR to monitor without power	Connector cable (female 4-pin to female 4-pin) 20cm	0-876-27	1
DVR to monitor with power	Connector cable (female 4-pin to female 4-pin) 20cm	0-876-25	1



CCTV ADAPTORS

CCTV ADAPTOR LEADS

APPLICATION	ADAPTORS	PART NO.	QTY
Allows use of own monitor in SCANIA/ MAN trucks with Durite safety equipment	CCTV adaptor (male 4-pin to Fakra) 0.45m	0-775-74	1
Allows use of own monitor in DAF trucks with Durite safety equipment	CCTV DAF Adaptor (male 4-pin to RCA) 0.15m	0-775-73	1
Allows use of own monitor in VOLVO trucks with Durite safety equipment	CCTV adaptor (male 4-pin to FM4 FH4) 0.15m	0-775-20	1



CCTV HARD WIRE KIT

CCTV Hard Wire Kit with ATO, Micro & Low Profile Fuse Adaptors

- Power to CCTV/dash camera with no stray wires
- 3m of cable for hard wire installation
- 5A max current

PART NO.	DESCRIPTION	QTY
0-776-97	Hard wire kit	1



SPLITTER & SWITCHER

Y PIECE SPLITTER CABLE



Male 4-Pin Y Piece Splitter Cable to 2 Female 4-Pin Aviation

- Camera output can be split to 2 devices
- 20cm length
- Screened cable

PART NO.	DESCRIPTION	QTY
0-775-84	Y piece splitter cable	1
0-775-81	1 x Non-DC output and 1 x DC output	1

SPLITTER BOX FOR 960H CAMERAS



2-Channel CCTV Splitter.
Input 2 cameras where usually you could only fit 1.
Camera images split showing 2 on a single channel at the same time. The images can be mirror or normal image.
Camera 1 can take priority using the trigger cable supplied.

- 10-32V. 14W max
- Current consumption 2 x 500mA

PART NO.	DESCRIPTION	QTY
0-776-50	Camera Splitter	1

CCTV WIRELESS AERIALS

CCTV WIRELESS AERIAL

Replacement aerial for any wireless monitor or camera

- Operation Frequency 2400~2483.5MHz



WIRELESS AERIAL FOR;

PART NO.	CAMERA		MONITOR		QTY
	0-775-29	0-775-60	0-776-58	0-775-58	
0-776-44	-	-	✓	-	1
0-775-49	✓	-	-	-	1
4-775-97	-	-	-	✓	1
4-775-98	-	✓	-	-	1



CCTV KITS & VEHICLE SAFETY ACCESSORIES WARNING SIGNS

WARNING SIGNS

LED BLIND SPOT CYCLE WARNING SIGN

Highly visible LED flashing sign with audible bleeps to warn cyclists when vehicle is about to turn.

- Suitable for 12V and 24V vehicles
- The system employs a set of synchronised high intensity LEDs flashing to extend visibility day or night
- Tough polycarbonate frame with stainless steel backing and stainless steel mounting plate
- Flashes and bleeps with vehicle indicator
- Automatic shut off when all hazards are in operation
- Bright LED display - 140mm x 140mm
- E-Marked, R10



PART NO.	DESCRIPTION	QTY
0-870-60	LED Blind spot cycle sign	1

SELF-ADHESIVE VINYL SAFETY SIGNS

Blind spot take care

- Landscape 300 x 200mm
- Portrait 200 x 300mm

CCTV operating on this vehicle

- External - Large sign 150 x 110mm
- Internal - Small sign 60 x 80mm

PART NO.		DESCRIPTION	QTY
0-870-51	Landscape	Blind spot - take care	1
0-870-50	Portrait	Blind spot - take care	1
0-870-52	External	CCTV operating on this vehicle	5
0-870-53	Internal	CCTV operating on this vehicle	5



FRENCH BLIND SPOT WARNING SIGN FOR HGVS OVER 3.5T

Durite French warning sign "Attention Angles Morts" translates to "Warning Blind Spots" to warn vulnerable road users in urban areas.

Since January 2021 HGVs over 3.5T operating in France must be fitted with 3 warning signs (right side, left side and rear of the vehicle) or could risk being fined €135.

The warning signs are used to show the blind spot zones to vulnerable road users in urban areas, highlighting the potential hazard and providing guidance to help mitigate the danger.

- 250 x 170mm Portrait
- Waterproof vinyl plastic & adhesive
- Vibrant colours to comply with the regulation
- Laminated for added protection & longer life

PART NO.	DESCRIPTION	QTY
0-870-54	French warning sign	1



WHY DURITE CCTV KITS?

WHAT SHOULD YOU BE LOOKING FOR IN A KIT



1. MONITOR SIZE & NUMBER OF CHANNELS



Leisure customers might prefer a smaller 5" monitor whilst Truck drivers usually go for 7".

9" monitors are becoming increasingly popular as they are recommended by FORS.



2. APPLICATION - WIRED OR WIRELESS



Commonly commercial vehicles are fitted with a wired kit.

Wireless systems enable a driver to easily interchange trailers. Installation is also quicker since no cable is needed between cameras and monitor.



3. NUMBER OF TRIGGERS



Do you want the monitor to automatically display a camera view?

If the customer wants the monitor to automatically display the left camera when turning left and rear camera when reversing, the kit will need 2 triggers.

Sometimes CCTV kits come with 1 trigger only.

4. QUALITY OF THE DISPLAY



Cameras & Monitor

Make sure the monitor is TFT-LCD. Together with CCD cameras or CMOS cameras with over 600TVL to get a good quality image.

Rear & side cameras should have infrared LEDs for night vision.

5. IP RATING



Making sure your cameras are protected against the elements

Go for IP68 as minimum for a fully water- and dustproof camera.

An IP69K rating means your camera will resist jet/pressure wash.



6. QUALITY ASSURANCE



Warranty / Certification / Accreditation

Make sure your kit is E-Marked and look for extended warranty terms.

A 2-year warranty is often a gauge of quality.

FORS Associate Suppliers is a good starting point when selecting your supplier.

FOR THE FULL DURITE RANGE OF CCTV KITS, SEE PAGES 14–18.

02

LIGHTING



ONE OF THE MOST
VERSATILE LED
LIGHTING RANGES ON
THE MARKET.

WARNING LIGHTS	46
LIGHT BARS	52
BEACONS	56
WORK LAMPS	60
INTERIOR/EXTERIOR LAMPS	72
REAR COMBINATION LAMPS	77
SINGLE FUNCTION LIGHTS	84
MARKER LAMPS	86
NUMBER PLATE LAMPS	89
HEADLAMPS	90
REFLECTORS	91
BULBS, DISPENSERS & BULB HOLDERS	92

WARNING LIGHTS

LED WARNING LIGHTS

R10 WARNING LIGHTS

GREAT VALUE - 12, 6 OR 4 LEDs



Approved



Dual voltage
12/24V



Waterproof
IP67

ULTRA-HIGH INTENSITY

- 19 programmable flash sequences
- 0.5W LEDs
- CE, EMC R10 approved
- Protected to IP67



12 LEDs



6 LEDs



4 LEDs



Amber



Red



Amber & White



Amber & Red

PART NO.			DESCRIPTION	WATTS	QTY
0-441-74	12 LEDs	Amber	L 114 x W 43.4 x H 12.5mm	12 x 0.5W	1
0-441-70	6 LEDs	Amber	L 112.6 x W 28.3 x H 12.6mm	6 x 0.5W	1
0-441-75	6 LEDs	Red	L 112.6 x W 28.3 x H 12.6mm	6 x 0.5W	1
0-441-67	6 LEDs	Amber/White	L 112.6 x W 28.3 x H 12.6mm	6 x 0.5W	1
0-441-65	6 LEDs	Amber/Red	L 112.6 x W 28.3 x H 12.6mm	6 x 0.5W	1
0-441-72	4 LEDs	Amber	L 86 x W 33 x H 11mm	4 x 0.5W	1

NEW
NEW
NEW

R65 LED FLUSH MOUNT WARNING LIGHTS

12/24V

IP67

R10

R65



- 1W OSRAM amber LEDs
- 19 flash patterns
- Protected to IP67
- CE, E-Marked ECE R10, R65

PART NO.		DESCRIPTION	QTY
0-441-76	18 LEDs	L 130 x H 55mm	1
0-441-77	24 LEDs	L 130 x H 65mm	1

LIGHTING WARNING LIGHTS

Works with

Please see corresponding numbers for possible synchronisation.
For example 0-441-40 and 0-441-07 can be used together.

1 2 3




6-LEDs



Amber

Blue

Red



White

Red & Amber

Red & Blue



3 LEDs



12 LEDs

R65 WARNING LIGHTS

HIGH INTENSITY SLIMLINE - 12, 6 OR 3 LEDs



Approved



Dual voltage
12/24V



Waterproof
IP68

1

- Amber, Blue, Red or White
- 3W LEDs - 3, 6 or 12 option
- 20 flash patterns

- Black aluminium housing
- Protected to IP68
- CE and EMC R10 R65 approved

PART NO.		DESCRIPTION		QTY
0-441-00	6 LEDs	Amber	W 113 x L 28.4 x D 9mm	1
0-441-02	6 LEDs	Blue	W 113 x L 28.4 x D 9mm	1
0-441-05	6 LEDs	Red	W 113 x L 28.4 x D 9mm	1
0-441-07	6 LEDs	White	W 113 x L 28.4 x D 9mm	1
0-441-15	6 LEDs	Red/Amber	W 113 x L 28.4 x D 9mm	1
0-441-25	6 LEDs	Red/Blue	W 113 x L 28.4 x D 9mm	1
0-441-30	3 LEDs	Amber	W 75 x L 28.1 x D 10mm	1
0-441-32	3 LEDs	Blue	W 75 x L 28.1 x D 10mm	1
0-441-35	3 LEDs	Red	W 75 x L 28.1 x D 10mm	1
0-441-10	12 LEDs	Amber	W 133 x L 56.8 x D 12.6mm	1

R65 LED HIGH INTENSITY WARNING LIGHTS

12/24V

IP69K

R10

R65

- 3W Amber LEDs - 3, 4 or 6-LED
- Up to 12 flash patterns
- Protected to IP69K
- E-Marked ECE R10, R65

PART NO.	DESCRIPTION		NO. FLASH PATTERNS	WATTS	QTY
0-441-63	3 LEDs	L 83 x W 31 x H 14mm	8	3 x 3W	1
0-441-64	4 LEDs	L 99 x W 31 x H 14mm	12	4 x 3W	1
0-441-66	6 LEDs	L 131 x W 31 x H 14mm	12	6 x 3W	1

NEW



Approved

SAE CLASS 1 LED SLIMLINE WARNING LIGHT



12/24V

IP67

R10

R65

- 6 x 3W amber LEDs
- 29 flash patterns
- Protected to IP67
- L 120.6 x W 32.2 x H 14.3mm
- CE, E-Marked ECE R10, R65 Class 1, SAE Class 1

PART NO.	DESCRIPTION	QTY
0-441-80	6-LED amber warning light	1



29 flash patterns



SAE CLASS 1 6-LED AMBER LOW PROFILE WARNING LIGHT



12/24V

IP67

R65

R10

- Ultra high intensity 6 x 3W LEDs flush warning light
- 10 programmable flash sequences
- CE, ECE R65 Class 1, EMC R10, SAE Class 1
- L 120 x W 32 x H 14.4mm

PART NO.	DESCRIPTION	QTY
0-441-50	Amber low profile warning lamp	1



Approved



SAE CLASS 2 12-LED AMBER WARNING LIGHT



12/24V

IP69K

R65

R10

- 12 x 3W amber LEDs
- 19 flash patterns
- CE, E-Marked R10 EMC, R65 Class 2
- L 108 x W 36 x H 11.9mm

PART NO.	DESCRIPTION	QTY
0-441-20	12-LED Amber warning light	1



IP69K



Approved



R65 12-LED AMBER WARNING LIGHT



12/24V

IP67

R65

R10

- 12-LED warning light
- 10 programmable flash sequences
- CE, ECE R65 and EMC R10.05
- L 114 x W 44 x H 24mm

PART NO.	DESCRIPTION	QTY
0-441-12	5W amber warning lamp	1



Approved





LOOKING FOR A COMBINED WARNING LIGHT WORK LAMP?

See page 64.



25W R65 WARNING LAMP WITH SCENE LIGHT

12-30V

IP67

R65

R10

- 9 Amber & 3 White LEDs
- 13 flash patterns
- E-Marked R65 & R10 EMC
- L 170 x W 70.5 x H 81.5mm




Approved



NEW

PART NO.	DESCRIPTION	QTY
0-441-62	12-LED Amber warning light	1

R65 LED CORNER WARNING LIGHT



360° Coverage with 4

12/24V

IP67


R65

R10

- 44 x 0.5W Amber LEDs
- 36 flash patterns
- E-Marked R65 & R10 EMC
- L 192 x W 80 x H 55mm

PART NO.	DESCRIPTION	QTY
0-441-61	LED corner warning light	1

R65 LED CORNER WARNING LIGHT



360° Coverage with 4

12/24V

IP67

R10

R65

- 5 x 3W amber SMD LEDs
- 10 flash patterns
- 120° horizontal light output
- L 176.8 x W 40.8 x D 55.6mm
- CE, E-Marked ECE R10, R65

PART NO.	DESCRIPTION	QTY
0-441-60	LED corner warning light	1

R65 WARNING LAMP WITH NPL



NEW

12/24V

IP67

R10

R65

- 12 x 3W amber LEDs
- 3 x 0.5W white LEDs
- 36 flash patterns
- L 133 x W 36 x H 38mm
- CE, E-Marked R10, R65, R4

PART NO.	DESCRIPTION	QTY
0-441-85	Amber warning light with NPL	1

DUAL FUNCTION LED R65 WARNING LAMPS

10-30V

IP67

R10

R65

- 6 x 3W warning LED
- 20 safety function LEDs
- 10 flash patterns
- CE, E-Marked ECE R10, R65

PART NO.	DESCRIPTION	QTY
0-441-55	Warning lamp with Stop/Tail	1
0-441-56	Warning lamp with Direction Indicator	1
0-441-57	Warning Lamp with Side Marker	1

NEW



Warning lamp



Stop/Tail



Stop/Tail
& Warning lamp



Side marker or
Direction indicator

Works with

Please see corresponding numbers for possible synchronisation.
For example 0-441-40 and 0-441-07 can be used together.

1 2 3

HIGH INTENSITY LED 12/24V WARNING LIGHTS

LED

12/24V

- Chrome bezel
- 2-bolt fixing
- CE and ECE approved

Available with 3 LEDs

Vertical - L 29 x W 41 x H 98mm

Horizontal - L 98 x W 41 x H 29mm

Available with 4 LEDs

Vertical - L 29 x W 41 x H 118mm

Horizontal - L 118 x W 41 x H 29mm



	2	3	2	3	
	VERTICAL		HORIZONTAL		
	3 LEDS	4 LEDS	3 LEDS	4 LEDS	QTY
AMBER	0-442-30	0-442-40	0-442-10	0-442-20	1
WHITE	-	-	0-442-07	0-442-17	1
RED	-	0-442-35	0-442-05	0-442-15	1
BLUE	0-442-22	-	0-442-02	0-442-12	1
GREEN	-	-	0-442-04	-	1
Black plastic bezel	0-442-93	0-442-94	0-442-93	0-442-94	1
Black rubber through panel mount	0-442-98	0-442-99	0-442-98	0-442-99	1

R65 12/24V HORIZONTAL LED WARNING LIGHTS

LED

12/24V

IPX8

R65



- Amber LEDs
- 12/24V
- Black aluminium housing
- R65 and ECE approved
- Protected to IPX8

PART NO.

DESCRIPTION

QTY

0-442-11	3 LEDs. 12 flash patterns. L 98 x W 41 x H 29mm	1	2
0-442-21	4 LEDs. 19 flash patterns. L 119 x W 41 x H 31mm	1	3

HEAVY-DUTY R65/R10 TAIL LIFT LAMP

LED

IP67



- Ultra robust amber tail lift lamp
- 9-SMD LEDs per unit
- 18 flash patterns
- Protected to IP67
- E-Marked R10, R6 & R91

PART NO.

DESCRIPTION

QTY

0-170-45	Amber tail lift lamp	1
----------	----------------------	---

R65 LED WARNING LIGHT

LED

12/24V

IP67

R65



- 8.5W max
- 10 programmable flash patterns
- Polycarbonate lens with aluminium alloy housing
- Bracket or surface mounting
- CE, E-Marked, ECE R65 approved
- Protected to IP67
- 400mm flying leads
- L 74 x W 74 x D 41.02mm

PART NO.

DESCRIPTION

QTY

0-442-00	12-LED amber work lamp	1
----------	------------------------	---

LIGHTING WARNING LIGHTS

LED RECHARGEABLE WARNING FLARES



LED
IP67

- 16 SMD LEDs per unit
- Up to 60 hours burn time
- 9 flash patterns
- Protected to IP67
- Strong magnetic base




AMBER	DESCRIPTION	QTY
0-446-60	6-LED warning flares in battery charging case	1
0-446-61	1-LED warning flare supplied with charger	1
0-446-88	230V Euro battery charger	1
0-446-89	230V UK battery charger	1

R10 6-LED AMBER WARNING LIGHT

12/24V
IP67
R10

- 6 x 3W Amber LEDs
- 6 flash patterns: single; 67, 119, 208 & 375 FPM, double and quad flash
- Waterproof IP67
- ADC12 aluminium housing, PC lens & reflector
- L 143.50 x W 38.50 x H 95.50mm
- E-Marked R10, UKCA



NEW



6 flash patterns

PART NO.	DESCRIPTION	QTY
0-442-29	Amber warning light	1

🔧 1.8 meter flying lead.

R65 ROUND 36MM LED WARNING LIGHT

LED
IP67
R65
R10

- 10-30V
- Round warning lamp
- 4 x 3W 3535 LEDs
- 36 flash patterns
- Protected to IP67
- E-Marked R65, R10 EMC
- Ø 36mm



PART NO.	DESCRIPTION	QTY
0-441-41	36mm Amber	1

R65 ROUND 25MM LED WARNING LIGHT

LED
12/24V
IP68
R65

- 12/24V
- 3 x 3W LEDs
- CE, ECE R65 Class 1, SAE Class 1 approved
- Protected to IP68
- 20 selectable flash patterns
- Black aluminium housing



🔧 Mini Ø 25mm.

PART NO.	DESCRIPTION	QTY
0-441-40	25mm Amber	1

LIGHT BARS

LED LIGHT BARS

R65 AMBER LIGHT BARS

WITH 1-BOLT, 4-BOLT OR MAGNETIC MOUNT

“ Robust, R65 low profile amber light bars. ”



1ft, 2ft, 3ft, 4ft & 5ft



360° bright light output



Approved



Dual voltage
12/24V



Waterproof
IP67



Warranty
3 year

COMPACT & POWERFUL

- 10 programmable flash patterns, including double
- E-Marked, ECE R65 and ECE R10 approved
- Supplied with flying leads and carbon steel mounting brackets (4m cable & cigarette plug - magnetic)
- Robust UV resistant polycarbonate lens
- SMD LEDs



1ft, 1-Bolt Amber LEDs



1ft, 4-Bolt Amber LEDs



1ft, Magnetic Amber LEDs

PART NO.	SIZE	DESCRIPTION		LEDS	WATTS	QTY
0-443-46	1ft (286mm)	1-Bolt	Amber	40 x 1W	40W max	1
0-443-44	1ft (286mm)	4-Bolt	Amber	40 x 1W	40W max	1
0-443-85	1ft (345mm)	Magnetic	Amber	40 x 1W	40W max	1
0-443-40	2ft (760mm)	4-Bolt	Amber	104 x 0.5W	52W max	1
0-443-41	3ft (980mm)	4-Bolt	Amber	128 x 0.5W	64W max	1
0-443-42	4ft (1200mm)	4-Bolt	Amber	152 x 0.5W	76W max	1
0-443-43	5ft (1420mm)	4-Bolt	Amber	176 x 0.5W	88W max	1

LIGHTING LIGHT BARS LED LIGHT BARS

1FT RECHARGEABLE MAGNETIC LIGHT BAR

12/24V IP66 R10 R65

- 1ft (278mm) rechargeable light bar
- 20 x 3W Amber LEDs (60W max)
- 7.4V 6600mAh Li-ion battery
- 10 flash patterns
- Waterproof - IP66

- Magnetic base
- Remote control
- E-Marked R10 approved
- L 278 x W 164 x H 57mm

🔧 Achieve R65 when plugged in.

NEW



Rechargeable



Approved



PART NO. DESCRIPTION QTY

0-443-04	Magnetic mount	1
----------	----------------	---

R65 AMBER LED LIGHT BARS

12/24V IP65 R65 R10



Approved



- 1ft (280mm) amber LED light bars
- 10 flash patterns
- 24 x 3W LEDs (72W max)
- Waterproof to IP65
- Supplied with 4m cable and switch (cigarette plug for magnetic)
- E-Marked R65, R10 EMC approved

PART NO. DESCRIPTION QTY

0-443-01	Single bolt light bar	1
0-443-02	Magnetic base light bar	1

R65 AMBER MINI LED LIGHT BARS

12/24V IP65

R65 R10



Approved

Mini
0.75ft

- 0.75ft (260mm) amber LED light bars
- 10 flash patterns
- 30 x 3W LEDs (90W max)
- Waterproof to IP65
- Supplied with 4m cable and switch (cigarette plug for magnetic)
- E-Marked R65, R10 EMC approved

PART NO. DESCRIPTION QTY

0-443-17	Single bolt light bar	1
0-443-18	Magnetic base light bar	1

R65 1FT (390MM) LIGHT BARS

12/24V IP65

R10 R65



Approved

- 1ft (390mm) Amber lens light bar
- 36 LEDs (48W max)
- Single, double & rotating flash
- Waterproof - IP65
- Supplied with 4m cable (cigarette plug for magnetic)
- E-Marked R10 & R65 approved
- L 390 x W 183 x H 121mm



PART NO. DESCRIPTION QTY

0-443-81	Single bolt	1
0-443-82	Magnetic mount	1

NEW

R65 AMBER LENS 4-BOLT LED LIGHT BARS

12/24V IP67 R65 R10



Approved



- 10 programmable flash patterns, including double
- E-Marked, ECE R65 and ECE R10 approved
- Supplied with flying leads & mounting brackets
- Robust UV resistant polycarbonate amber lens
- SMD LEDs

PART NO. SIZE LEDs WATTS QTY

0-443-48	2ft (760mm)	104 x 0.5W	52W max	1
0-443-49	4ft (1200mm)	152 x 0.5W	76W max	1

LIGHTING LIGHT BARS LED LIGHT BARS

R10 AMBER LIGHT BAR

12/24V

IP67

R10



Approved

- 1FT (305mm)
- 72 amber LEDs
- Max power 36W
- 10 flash patterns
- E-Marked ECE R10 EMC approved
- Waterproof to IP67



PART NO.	DESCRIPTION	QTY
0-443-37	Magnetic mount	1

R10, R6, R7 LED LIGHT BAR WITH STOP/TAI/DI

LED

12/24V

IP67

R10

R6

R7




Robust design



Approved



- 12/24V Amber LED Light bar with Stop / Tail / Direction indicator function
- 4ft (1200mm)
- 4-bolt mount
- 136 SMD LEDs, 76W
- Protected to IP67
- 10 flash patterns
- Aluminium Chassis with PC Lens
- Approved to ECE R10 EMC, R6 and R7



PART NO.	DESCRIPTION	QTY
0-443-51	4ft Stop/Tail/DI amber light bar	1

R65 PREMIUM LED LIGHT BARS

12/24V

IP65

R10

R65

1ft, 2ft, 4ft & 5ft amber LED light bar

- 19 programmable flash patterns, including double
- 1W LED with 4D reflectors for maximum 360° light output
- 126W max power
- 4-bolt fixing
- Protected to IP65
- E-Marked, ECE R65 and ECE R10 approved
- Supplied with flying leads
- Robust 3mm thick polycarbonate lens

PART NO.	DESCRIPTION		LEDS	WATTS	QTY
0-443-31	1ft (356mm)	Amber	36 x 1W	36W max	1
0-443-32	2ft (743mm)	Amber	72 x 1W	72W max	1
0-443-34	4ft (1183mm)	Amber	108 x 1W	108W max	1
0-443-33	5ft (1403mm)	Amber	126 x 1W	126W max	1



Robust design

Warranty
3 year

Approved

3mm thick industrial lens
withstands shocks

3-WAY LIGHT BAR SWITCH PANEL



Works with all Durite light bars with adjustable flash patterns.

- 12/24V
- 15A/8A
- 5 core cable
- 2 x 5mm screws
- 970mm cable length
- L 100 x W 52 x H 31mm
- CE approved

PART NO.	DESCRIPTION	QTY
0-443-99	3-way light bar switch panel	1

LIGHTING LIGHT BARS LED LIGHT BARS

R65 12/24V AMBER LED LIGHT BARS



LED 12/24V IP65 R65

- L 297 x W 175 x H 53mm
- Amber 20 x 3W LEDs
- ECE and R65 approved
- 3 flash patterns; single, double and rotating
- Protected to IP65

PART NO.	DESCRIPTION	QTY
0-443-60	Single bolt light bar	1
0-443-65	Magnetic light bar	1

12-48V LED LIGHT BARS



LED 12-48V

- 65 flashes per minute
- ECE and EMC approved
- 2 x 12-LED heads
- L 410 x W 205 x H 122

PART NO.	DESCRIPTION	QTY
0-443-70	2-bolt LED light bar	1
0-443-75	Magnetic LED light bar	1

R65 ROTATING LIGHT BARS

R65 12/24V ROTATING LIGHT BAR



12/24V R65

- Mirrored reflector
- 160 ± 30 RPM
- L 395 x W 208 x H 148mm
- Amber lens
- Supplied without H1 bulbs
- ECE R65 and CE approved

PART NO.	DESCRIPTION	QTY
0-443-00	2-bolt fixing 12/24V light bar	1

R65 12/24V ROTATING LIGHT BAR



12/24V R65

- Mirrored reflector and amber lenses
- ECE R65 and CE approved
- 160 ± 30 RPM
- Illuminated centre section white to front and red to rear
- Supplied without bulbs
- L 1200 x W 210 x H 140mm

PART NO.	DESCRIPTION	QTY
0-443-12	1.2m light bar	1
1-443-92	Replacement lens	1

SWITCH PANEL

- 10-30V
- 15A at 12V / 10A at 24V
- Protected to IP64
- 18AWG 5 core cable
- 1.2M cable
- L 188.3 x W 108 x H 58mm
- CE & UKCA approved

PART NO.	DESCRIPTION	QTY
0-443-98	Light bar switch panel	1

NEW

Works with all Durite lights with adjustable flash patterns.




BEACONS

LED BEACONS

R10 LED BEACONS

IN AMBER & GREEN WITH SINGLE BOLT, 3-BOLT, FLEXI-DIN OR MAGNETIC BASE

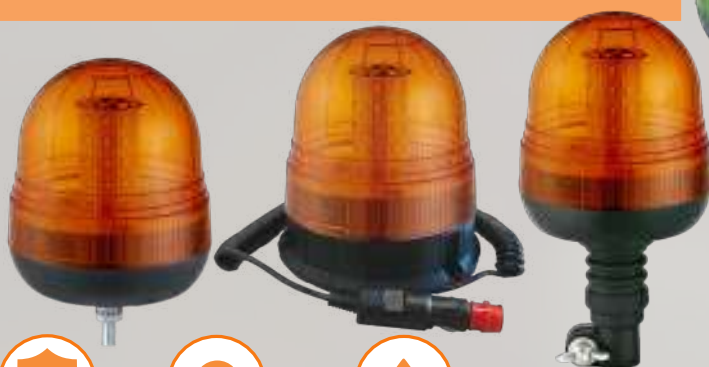

Approved



Dual voltage
12/24V



Waterproof
& dust-resistant

- 9W max, 40 LEDs
- Amber, Green or Purple polycarbonate lens
- Multifunction double, six & rotating flash
- Current draw 0.75A @ 12VDC
- CE, ECE EMC R10
- Protected to IP55

“

Multifunction
Amber & Green
LED beacons.

”



Single bolt, 3-bolt,
flexi-DIN or magnetic base



3 flash patterns

DESCRIPTION	AMBER	GREEN	QTY
	PART NO.	PART NO.	
Single bolt. H 195mm x Ø 128mm	0-445-06	4-445-06	1
3-bolt. H 155mm x Ø 140mm	0-445-08	4-445-08	1
Flexi-DIN. H 250mm x Ø 128mm	0-445-24	4-445-24	1
Magnetic base. H 170mm x Ø 140mm	0-445-60	4-445-60	1
Coloured lens	4-445-98	4-445-96	1
Purple lens	0-445-88		1

R65 THREE BOLT LED BEACON

LED

IP65

R65

R10



- 24 x 3W LEDs
- 3 flash patterns - single, double and rotating flash
- Protected to IP65
- E-Marked R65, R10 EMC
- H 190 x Ø 140mm

PART NO.	DESCRIPTION	QTY
0-445-27	Three bolt LED	1
4-445-95	Amber replacement lens	1

R65 SINGLE BOLT CLEAR LENS LED BEACON

LED

12/24V

IP56

R65



- 24 x 3W Amber LEDs
- 3 flash patterns
- Protected to IP56
- H 230 x Ø 128mm
- ECE R65, ECE R10 and CE approved

PART NO.	DESCRIPTION	QTY
0-445-26	Clear lens single bolt beacon	1
4-445-97	Clear replacement lens	1

LIGHTING BEACONS LED BEACONS

12/24V R65 LED BEACONS

LED

IP56

R65

R10

- Single flash, double flash, rotating
- 45 SMD LEDs

- Protected to IP56
- E-Marked, ECE R10, ECE R65 and CE approved

PART NO.	DESCRIPTION	QTY
0-444-41	Single bolt. H 165 x Ø 128mm	1
0-444-43	3-bolt. H 125x Ø 140mm	1
0-444-59	Flexi-DIN. H 210 x W Ø128mm	1
0-444-85	Magnetic base. H 135 x Ø 140mm	1

R65
R10

R65 & R10 approved

RECHARGEABLE LED BEACON



LED

IP56

R65

R10

Approved

- Rotating flash 125RPM
- 7.4V 2000mA Li-Ion battery
- Magnetic mount with suction cup
- Supplied with UK 230V charger and 12V cigarette lighter plug
- Protected to IP56
- E-Marked R65, R10 EMC

Portable & rechargeable.



PART NO.	DESCRIPTION	QTY
0-445-15	Magnetic base	1

ULTRA LOW PROFILE BEACON



12/24V

IP65

R65

R10

Approved

- Ultra low magnetic beacon
- 14 x 3W Amber LEDs
- Supplied with 3.8m cable & cigarette lighter plug
- 13 flash patterns
- Protected to IP65
- H 73 x W Ø163mm
- E-Marked R65, R10 EMC



PART NO.	DESCRIPTION	QTY
0-445-10	Magnetic base	1

REMOTE CONTROLLED RECHARGEABLE LED BEACON

LED

IP65

R65

R10

- 12 x 3W LEDs
- Wireless control distance of up to 25m
- 3 flash patterns - single, double and rotating flash
- 7.4V 5200mAh Li-ion battery
- Supplied with UK 230V charger and 12V cigarette lighter plug
- Magnetic base
- Protected to IP65
- E-Marked R65, R10 EMC
- H 80 x Ø 130mm



PART NO.	DESCRIPTION	QTY
0-445-14	Magnetic base	1

LOW PROFILE BEACONS

LED

IP65

R65

R10

- 10-30V
- 45 x 0.45W 2835 SMD amber LEDs
- Low profile
- 3 flash patterns - rotating, dual flashing, sextuple
- Protected to IP65
- E-Marked R65 & R10



	FLEXI-DIN	SINGLE BOLT	QTY
Low profile beacon	0-445-54	0-445-36	1

LIGHTING BEACONS LED BEACONS

R65 SINGLE BOLT LED BEACON



LED

12/24V

IP56

R65

- 132 single flashes per minute
- ECE R65, ECE R10 and CE approved
- Protected to IP56
- Ø 128 x H 200mm

PART NO.	DESCRIPTION	QTY
0-445-16	R65 LED beacon	1
0-445-99	Replacement lens	1

12/24V JUMBO 3-BOLT LED BEACON



LED

12/24V

IP66

R65

- 3-bolt fixing with amber lens
- 3W x 8 LEDs
- 15 flash patterns
- Single flash 120FPM
- EMC, ECE R65 and CE approved
- Protected to IP66
- Ø 163 x H 167.6mm

PART NO.	DESCRIPTION	QTY
0-445-95	R65 LED jumbo beacon	1
0-445-94	Replacement lens	1

12-80V MINI LED BEACON



LED

12-80V

IP65

- Double flash rate
- Protected to IP65
- Ideal for warehouses, forklifts and work equipment
- CE approved
- 2-bolt fixing

 12-80V.

PART NO.	DESCRIPTION	QTY
0-445-77	Mini LED beacon	1

12-110V MINI LED BEACON



LED

12-110V

- Polycarbonate amber lens
- CE approved
- 5 high intensity LEDs
- 60 quad flashes per minute
- L 98 x W 72 x H 130mm

 12-110V.

PART NO.	DESCRIPTION	QTY
0-445-75	2-bolt mini LED beacon	1
0-446-97	Replacement lens for the above	1

12-110V LOW PROFILE LED BEACONS



LED

12-110V

- 5 high intensity LEDs
- CE approved
- 45 quad flashes per minute
- L 130 x W 130 x H 95mm

 12-110V.

PART NO.	DESCRIPTION	QTY
0-445-85	3-bolt low profile LED beacon	1
0-445-86	Magnetic low profile LED beacon with 6 LEDs	1
0-445-97	Replacement amber lens for 0-445-85 / 0-445-86	1

R65 DOUBLE FLASH LED BEACON AMBER LENS



R65

- Amber lens for 0-445-11 R65 Double Flash LED beacon

PART NO.	DESCRIPTION	QTY
0-445-90	Replacement amber lens	1

R65 ROTATING BEACONS

R65 BULB ROTATING BEACONS

12/24V

R65

- Supplied without H1 bulb
- EMC, ECE R65 and CE approved
- 160 ± 30 RPM
- Amber lens



PART NO.	DESCRIPTION	QTY
0-444-01	Single bolt, H 156 x Ø 131mm	1
0-444-03	3-bolt, H 143 x Ø 153mm	1
0-444-19	Flexi-DIN, H 214 x Ø 134mm	1
0-444-55	Magnetic (50mph), H 150 x Ø 166mm	1
0-444-93	Replacement red lens	1

R65 ROTATING BEACONS

12/24V

IP56

R65

- H1 55W / H1 70W
- 160 single flashes per minute
- Protected to IP56
- ECE R65, ECE R10 and CE approved



PART NO.	DESCRIPTION	QTY
0-444-75	R65 magnetic rotating beacon	1
0-444-39	R65 flexi-DIN rotating beacon	1
0-444-99	Replacement amber lens	1

FLASHING BEACONS

R65 12/24V FLASHING BEACON

12/24V

- EMC, CE and CAP168 ICAO approved
- 70 single flashes per minute
- Supplied without SCC bulb



PART NO.	DESCRIPTION	QTY
0-445-01	Single Bolt	1
0-445-90	Replacement amber lens	1

12-48V DOUBLE FLASH XENON BEACON

12-48V

- 75 double pulses per minute, 6 joules
- Amber lens
- H 156 x Ø 131mm
- EMC, ECE and CE approved



PART NO.	DESCRIPTION	QTY
0-446-01	Single bolt	1
0-445-90	Replacement amber lens	1

12-110V LOW PROFILE XENON BEACON

12-110V

- 70 flashes per minute
- 1.7 joules
- L 104 x W 104 x H 90mm
- CE approved

⚠ 12-110V.



PART NO.	DESCRIPTION	QTY
0-446-86	Magnetic low profile xenon beacon	1
0-446-98	Amber lens	1
0-446-84	Spare xenon tube	1

DIN SPIGOTS



PART NO.	DESCRIPTION	QTY
0-445-19	Vertical DIN spigot or through mounting for spigot mount beacons	1
0-445-20	Horizontal DIN spigot mounting for spigot mount beacons	1
0-445-21	Rotatable DIN spigot vertical mounting for spigot mount beacons	1

WORK LAMPS

LED WORK LAMPS

GREAT VALUE WORK LAMPS



1000 Lumens.



1200 Lumens.



1700 Lumens.



1700 Lumens.



Waterproof



Can be used with STAND11



Great Value LED Work Lamps

LED

IP67

12/24V

- A robust 12/24V LED work lamp
- Black powder coated die cast aluminium case
- Polycarbonate lens
- Protected to IP67

PART NO.

DESCRIPTION

LUMENS

WATTS

QTY

0-420-44	Square	L 135 x W 108 x D 40mm	1000Lm	5 x 3W	1
0-420-45	Round	L 136 x W 114 x D 43mm	1200Lm	6 x 3W	1
0-420-46	Square	L 135 x W 108 x D 40mm	1700Lm	9 x 3W	1
0-420-47	Round	L 136 x W 114 x D 43mm	1700Lm	9 x 3W	1

EXTRA POWERFUL 54W COB LED WORK LAMPS



LED

4500LM

IP69K

10-30V

- 9 x 6W COB LEDs
- 10-30VDC
- Colour temperature 5000 - 6500K
- Protected to IP69K
- ECE R10 approved
- Aluminium housing, PC lens



Approved



Super Bright

PART NO.

DESCRIPTION

QTY

0-420-86	Square work lamp. L 109 x W 57 x H 135mm	1
0-420-87	Round work lamp. L 116 x W 65 x H 136mm	1



Powerful

2500 LUMENS WORK LAMPS



LED

IP67

10-30V

- Protected to IP67
- Black powder coated die cast aluminium case and polycarbonate lens

PART NO.

DESCRIPTION

LUMENS

QTY

0-420-34	Square. 30 x 1W LEDs L 111 x W 34.8 x H 136.5mm	2500Lm	1
0-420-04	Same as above. With toggle switch	2500Lm	1
0-420-35	Round. 24 x 1W LEDs Ø 114 x D 39.3mm	2150Lm	1

NEW

Switch option.

“

Small, Compact
& Powerful

”



MINI | FLOOD OR SPOT | 800 LUMENS

COMPACT WORK LAMPS



Approved



Dual voltage
12/24V



Waterproof
& dust-resistant

- 10W LEDs
- Protected to IP68
- Black powder coated die cast aluminium with polycarbonate lens and stainless steel swivel bracket
- With or without built-in 2-PIN DT connector
- CE, E-Marked R10



DT connector

DT connector

RECTANGULAR | UP TO 2400 LUMENS

✂ Uses DT connector 0-011-42.



ROUND | 2000 LUMENS



DT connector

SQUARE | 3200 LUMENS

✂ Uses DT connector 0-011-42.

PART NO.		DESCRIPTION			LUMENS	WATTS	DT CONNECTOR	QTY
0-420-22	Square	Flood	Single bolt	L 53 x W 49.5 x H 84.2mm	800Lm	1 x 10W	-	1
0-420-23	Square	Spot	Single bolt	L 53 x W 49.5 x H 84.2mm	800Lm	1 x 10W	-	1
0-420-24	Round	Flood	Single bolt	L 57 x W 58 x H 87mm	800Lm	1 x 10W	-	1
0-420-25	Round	Spot	Single bolt	L 57 x W 58 x H 87mm	800Lm	1 x 10W	-	1
0-420-26	Rectangle	Flood	Single bolt	L 86 x W 51 x H 78.9mm	1600Lm	2 x 10W	2-PIN	1
0-420-27	Rectangle	Flood	Single bolt	L 111 x W 51 x H 86.7mm	2400Lm	3 x 10W	2-PIN	1
0-420-30	Round	Flood	Magnetic base	L 85 x W 72.4 x H 132mm	2000Lm	3 x 10W	-	1
0-420-31	Round	Flood	Single bolt	L 85 x W 72.4 x H 114.2mm	2000Lm	3 x 10W	-	1
0-420-74	Square	Flood	Single bolt	L 78 x W 57 x H 103.2mm	3200Lm	4 x 10W	2-PIN	1

COMPACT 12/24V WORK LAMP



Mini



LED 1500LM IP68 12/24V

- 6 x 3W CREE LEDs
- Polycarbonate lens
- Black powder coated die cast aluminium case
- L 76 x W 42 x H 90mm
- CE approved

PART NO.	DESCRIPTION	QTY
0-420-78	18W work lamp	1

9 X 3W 12/24V LED WORK LAMPS

LED 2150LM IP67 12/24V



- Polycarbonate lens
- Protected to IP67
- 2150 lumens
- Black powder coated die cast aluminium case
- Supplied with 450mm flying lead

PART NO.	DESCRIPTION	QTY
0-420-66	Square. L 110 x W 60 x H 136mm	1
0-420-67	Round. L 116 x W 65 x H 137mm	1

9 X 3W WORK LAMP WITH DT CONNECTOR



DT connector



LED IP69K 12/24V 2400LM

- 9 x 3W LEDs
- Protected to IP69K
- L 107 x W 51.3 x H 147.3mm
- Aluminium housing with polycarbonate lens
- CE, E-Marked R10

⚠ Uses DT connector 0-011-42.

PART NO.	DESCRIPTION	QTY
0-420-41	27W work lamp	1

3800 LUMENS LED WORK LAMPS



Flood or Spot



Powerful

LED 3800LM IP67 10-30V

- 16 x 3W
- Protected to IP67
- L 88 x W 125 x H 158mm
- Black powder coated die cast aluminium case
- Polycarbonate lens

PART NO.	DESCRIPTION	QTY
0-420-76	Flood work lamp	1
0-420-77	Spot work lamp	1

LIGHTING WORK LAMPS LED WORK LAMPS

10-60V LED WORK LAMPS



2000 Lumens.

1000 Lumens.

LED IP67 10-60V

- Protected to IP67
- Polycarbonate lens
- L 98 x W 80 x H 70mm

PART NO.	DESCRIPTION	QTY
0-420-61	2 x 10W - 2000LM work lamp	1
0-420-60	2 x 5W - 1000LM work lamp	1

UNIVERSAL WORK LAMP WITH 90° BRACKET



LED IP69K 10-30V 1900LM

- 90° bracket for either horizontal or vertical fixture
- 60° flood beam
- 10 x 1.5W OSRAM LEDs
- Protected to IP69K
- CE, RoHS, E-Marked R10.05

PART NO.	DESCRIPTION	QTY
0-420-70	Universal work lamp with 90° bracket	1

3200 LUMENS OVAL WORK LAMP

LED 3200LM IP68 9-32V

- Built-in 2-PIN DT connector
- 4 x 10W
- Protected to IP68
- Aluminium with polycarbonate lens
- L 110 x W 96 x H 142mm
- CE, E-Marked R10

PART NO.	DESCRIPTION	QTY
0-420-33	40W work lamp	1



90° flood beam



Built-in DT connector

OVAL BEZEL WORK LAMPS WITH DT CONNECTOR

LED 1680LM IP68 9-32V

- 8 x 3W CREE LEDs
- 2-PIN DT connector
- Aluminium housing with polycarbonate lens
- L 167.2 x W 75 x H 104.5mm
- E-Marked, CISPR25 level 4
- Uses DT connector 0-011-42.

DESCRIPTION	OVAL BEZEL	SINGLE BOLT	QTY
Oval Work Lamp	0-420-18	0-420-19	1



DT connector

NEW

LED WORK LAMPS ADR APPROVED

ADR APPROVED WORK LAMPS



Approved

NEW



2430 Lumens.



2430 Lumens.

4320 Lumens.
DT connector.2160 Lumens.
DT connector.

LED 4320LM IP67/IP69K 9-32V

- Colour temperature 6000-6500K
- Protected to IP67/ IP69K
- Aluminium housing & polycarbonate lens
- 350mm flying lead
- E-Marked R10 EMC, ADR approved

0-421-22 & 0-421-25 also approved for reversing, R148.

Both use DT connector 0-011-42.



ADR approval shows the unit is sealed, intrinsically safe & ideal for vehicles transporting dangerous goods.

PART NO.		DESCRIPTION	LUMENS	WATTS	DT CONNECTOR	QTY
0-421-20	Square	L 108.3 x W 44.3 x H 108.2mm	2430Lm	27W	No	1
0-421-21	Round	Ø 115.5 x D 60.3mm	2430Lm	27W	No	1
0-421-22	Square	L 110.3 x 64.8 x H 110.2mm	4320Lm	48W	Yes	1
0-421-25	Oval	L 142.3 x W 62.5 x H 89.2mm	2160Lm	24W	Yes	1

LED WORK LAMPS WITH AMBER WARNING

LED WORK LAMPS WITH AMBER WARNING



Approved

LED 6431LM IP67/IP69K 12/24V



- 2-function white & flashing amber warning light
- OSRAM LEDs
- Colour temperature 5700K

- Protected to IP67/IP69K
- Aluminium housing & PC lens
- 500mm flying lead
- E-Marked R10, R65

PART NO	SIZE	LUMENS	CLEAR	AMBER	QTY
0-420-08	4" Square	4000LM	9 LEDs (45W)	9 LEDs (10W)	1
0-420-09	4" Round	4000LM	9 LEDs (45W)	9 LEDs (10W)	1
0-420-11	4.5" Square	6430LM	16 LEDs (80W)	16 LEDs (11W)	1



LOOKING FOR A DRIVING LAMP WITH WARNING LIGHT?

See page 68.



LIGHTING WORK LAMPS LED WORK LAMPS

HEAVY-DUTY LED WORK LAMPS

80W HEAVY-DUTY LED WORK LAMP



LED 8800LM IP68/IP69K 10-30V


Super Bright

- 16 x 5W OSRAM LEDs
- Protected to IP68/IP69K
- 2-PIN DT connector
- L 110 x W 90 x H 146mm
- Aluminium housing with polycarbonate lens
- CE, E-Marked R10



Uses DT connector 0-011-42.

PART NO.	DESCRIPTION	QTY
0-420-32	80W work lamp	1



100W HEAVY-DUTY LED WORK LAMP



LED 8000LM IP68 9-32V

Spec Upgrade

- 20 x 5W CREE LEDs
- Aluminium case
- Polycarbonate lens
- L 160 x W 115.4 x H 141mm
- Protected to IP68
- CE, E-Marked R10



PART NO.	DESCRIPTION	QTY
0-420-82	100W work lamp	1

COMBO SPOT/FLOOD WORK LAMP



LED 3000LM IP67/IP69K 10-30V

Flood & Spot

- Combo beam 6 x 5W CREE, 4 x 10W OSRAM LEDs
- Aluminium case
- Polycarbonate lens

- L 89.4 x W 72 x H 89.4mm
- Protected to IP67/IP69K
- CE, E-Marked R10, RoHS, UKCA



NEW

PART NO.	DESCRIPTION	QTY
0-421-31	70W work lamp	1



Combo Beam

LED HEAVY-DUTY WORK LAMP



LED 5000LM IP67/IP69K 10-30V

DT connector

- 16 x 5W CREE LEDs (80W max)
- 2-Pin DT connector
- Aluminium case
- Polycarbonate lens
- L 108 x W 67 x H 108mm
- Protected to IP67/IP69K
- CE, E-Marked R10, RoHS, UKCA



Uses DT connector 0-011-42.

PART NO.	DESCRIPTION	QTY
0-421-32	80W work lamp	1

NEW

LED HEAVY-DUTY WORK LAMP



LED 2800LM IP67/IP69K 10-30V

DT connector

- 5 x 10W CREE LEDs (50W max)
- 2-Pin DT connector
- Aluminium case
- Polycarbonate lens
- L 89.4 x W 72 x H 89.4mm
- Protected to IP67/IP69K
- CE, E-Marked R10, RoHS, UKCA



Uses DT connector 0-011-42.

PART NO.	DESCRIPTION	QTY
0-421-30	50W work lamp	1

NEW

LED MAGNETIC BASE OR HANDLE WORK LAMPS

5 X 3W LED RECHARGEABLE WORK LAMP



2 light colours & modes



LED

IP65

10-30V

1000LM

- Rechargeable work lamp with handle & magnetic base
- 2 selectable light colours (white/amber) and modes, full or 30%
- Battery life up to 6 hours
- Supplied charger & cigarette plug charger
- Protected to IP65
- 5V 2.1A USB port

PART NO.

DESCRIPTION

QTY

0-541-31	5 x 3W Rechargeable work lamp	1
0-541-97	12/24V Cigarette plug charger	1
0-541-98	100-230V AC UK plug charger	1

LED WORK LAMP WITH FLEXI-DIN & HANDLE



LED

IP67

10-30V

2430LM

- 4" Square work lamp with handle
- 27W LED
- Flexi-DIN mount
- Aluminium housing with polycarbonate lens
- CE, E-Marked R10, UKCA

NEW

PART NO.

DESCRIPTION

QTY

0-420-62	4" LED work lamp with handle	1
----------	------------------------------	---

360° SWIVEL BRACKET WORK LAMP



LED

IP69K

12/24V

4950LM

- 9 x 5W LEDs
- 400mm flying leads
- Aluminium housing with polycarbonate lens
- CE, E-Marked R10

PART NO.

DESCRIPTION

QTY

0-420-37	360° Swivel bracket work lamp	1
----------	-------------------------------	---

12/24V LED WORK LAMP



LED

IP67

12/24V

2600LM

- 12 x 3W LEDs
- Diameter 140mm, Depth 70mm
- Magnet base, handle, switch, cable and cigarette plug
- PMMA lens
- Black powder coated die cast aluminium case

PART NO.

DESCRIPTION

QTY

0-420-79	LED work lamp	1
----------	---------------	---

4 X 3W 12/24V LED WORK LAMP



LED

IP67

12/24V

900LM

- Low current draw, 1A at 12V DC
- Protected to IP67
- Polycarbonate lens
- Black powder coated die cast aluminium case
- L 82 x W 71 x H 114mm

PART NO.

DESCRIPTION

QTY

0-420-68	Magnetic base	1
----------	---------------	---

6 X 3W 12/24V LED WORK LAMPS



LED

1350LM

IP67

12/24V

- Low current draw, 1.4A at 12V DC
- L 110 x W 56 x H 85mm
- Polycarbonate lens
- Black powder coated die cast aluminium case

PART NO.

DESCRIPTION

QTY

0-420-71	Single bolt	1
0-420-72	Magnetic base	1



LOOKING FOR A COMPACT WORK LAMP WITH MAGNETIC BASE?

See page 61.



LIGHTING WORK LAMPS LED WORK LAMPS

LED BAR & RECTANGULAR WORK LAMPS

WARNING LIGHT WORK LAMP BAR



LED 1325LM IP69K 10-30V

- 80° flood beam & warning lamp
- 9 x 1.5W, 9 x 1 W OSRAM LEDs
- Protected to IP67/IP69K
- Amber warning light
- Aluminium housing
- Polycarbonate lens
- E-Marked, R10 EMC

PART NO.	DESCRIPTION	QTY
0-420-15	Work lamp	1

10-30V LED WORK LAMP BARS



Flood or Spot

LED 2700LM IP67 10-30V

- Protected to IP67
- 2700 lumens
- 2-bolt tilt fixing bracket
- Black die cast aluminium housing
- Polycarbonate lens

PART NO.	DESCRIPTION	QTY
0-420-92	Flood work lamp	1
0-420-93	Spot work lamp	1

POWERFUL LED WORK LAMP BARS



Flood or Spot

LED 4050LM IP67 12/24V

- Protected to IP67
- 4050 lumens
- 2-bolt tilt fixing bracket
- Black die cast aluminium housing
- Polycarbonate lens

PART NO.	DESCRIPTION	QTY
0-420-90	Flood work lamp	1
0-420-91	Spot work lamp	1

LED FLOOD/SPOT WORK LAMP BAR

LED 20000LM IP69K 12/24V

- 100 x 3W LEDs
- 20,000 lumens
- Protected to IP69K
- H 111.2 x W 1380 x D 86.5mm
- Spot/flood combo beam
- Black powder coated die cast aluminium housing
- Polycarbonate lens



Super bright
20,000
Lumens

PART NO.	DESCRIPTION	QTY
0-420-94	4ft spot beam work lamp bar	1

Powerful

CREE LED WORK LAMP LIGHT BARS

LED IP67 12/24V

- Robust black die cast aluminium housing
- Polycarbonate lens
- Protected to IP67
- Surface or bracket mounting
- EMC approved

PART NO.	DESCRIPTION	QTY
0-420-88	H 110 x W 268 x D 82mm. 8 x 5W. 3040Lm	1
0-420-89	H 110 x W 484 x D 82mm. 16 x 5W. 6080Lm	1



Surface or
bracket mount

LED DRIVING LAMPS

200W DRIVING LAMP BARS WITH AMBER WARNING LIGHT & DRL



Approved



DRL



Warning

LED 16800LM IP69K 10-30V

NEW



- Super powerful OSRAM LEDs
- 600mm fly lead with 6-PIN DT connector
- Colour temperature 5700K
- Aluminium housing and polycarbonate lens
- E-Marked R10 EMC, R112, R7 & R65

✚ Uses DT connector 0-011-46.

PART NO.	SIZE	DRIVING	DRIVING	DRL	WARNING	LUMENS	QTY
0-420-12	L 560.6 x W 67.3 x H 70mm	40 x 5W	200W	30 LEDs	40 LEDs	16,800Lm	1
0-420-17	L 375 x W 67.3 x H 70mm	24 x 5W	120W	18 LEDs	24 LEDs	10,080Lm	1


60W ROAD LEGAL LED WORK/DRIVING LAMP



Approved

LED 5400LM IP68 9-36V

- Powerful 60W ETI LEDs
- 300mm flying leads
- Approx life: 50,000 hours. Colour temperature 6500K
- Cast aluminium case and polycarbonate lens
- E-Marked R10 EMC, R112



Powerful

PART NO.	DESCRIPTION	QTY
0-420-96	L 353 x W 68 x H 55 mm driving lamp	1

120W DRIVING WORK LAMP BAR WITH DT & DRL



DT connector



✚ Uses DT connector 0-011-43.

LED 1200LM IP67 12/24V

NEW

- Powerful 120W CREE LEDs
- 500mm flying lead with 3-PIN DT connector
- Colour temperature 6000-7000K
- Aluminium housing and polycarbonate lens
- L 542 x W 80 x H 83.5 mm
- E-Marked R10, R148, R149

PART NO.	DESCRIPTION	QTY
0-420-16	542mm driving work lamp	1

61W DRIVING LAMP WITH 140° ANGLE FLOOD BEAM

140°
Angle Beam

✚ Uses DT connector 0-011-42.

LED 6920LM IP69K 10-30V

NEW

- 61W OSRAM LEDs
- 500mm flying lead with 2-PIN DT connector
- Die-cast aluminium housing and polycarbonate lens
- Approx life: 50,000 hours
- L 131 x H 109 mm
- E-Marked R10, R112

PART NO.	DESCRIPTION	QTY
0-420-13	5" Cube driving lamp	1

LIGHTING WORK LAMPS LED WORK LAMPS

9" LED HIGH BEAM/POSITION LAMP



LED

6400LM

IP66

10-30V

- 9" high beam/position lamp with 4-PIN DT connector
- 10 LEDs high beam (65W)
- 7 LEDs position beam (0.3W)
- Black aluminium housing, PC lens with stainless steel SS304 bracket
- E-Marked R112, R87 and R10 EMC

✚ Uses DT connector 0-011-44.



Approved



DT connector

PART NO.	DESCRIPTION	QTY
0-420-29	9" LED driving Lamp	1

9" LED ROUND HIGH BEAM/POSITION LAMP



LED

6000LM

IP67

9-32V

- 9" high beam/position lamp with 3-PIN DT connector lead
- 12 CREE LEDs high beam (60W)
- 2 LEDs position beam (0.5W)
- Black aluminium housing, PC lens with stainless steel SS304 bracket
- E-Marked R112, R7 and R10 EMC



Approved



PART NO.	DESCRIPTION	QTY
0-420-28	9" LED round driving Lamp	1

AUXILIARY DRIVING LAMPS



LED

R112

IP68



Approved

- 7" or 9" LED Auxiliary Driving Lamp
- 9-32VDC
- 5W LEDs
- Aluminium housing with PC lens

- Stainless steel bracket
- Protected to IP68
- E-Marked, ECE R112 approved

PART NO.	DESCRIPTION	WATT	LUMENS	QTY
0-537-47	7" 18 LEDs	90W max	7200Lm	1
0-537-49	9" 30 LEDs	150W max	12000Lm	1



LOOKING FOR LED HEAD LAMPS? See page 90.



LED REVERSING LAMPS

HIVE REVERSING WORK LAMP



Approved

LED

IP68

9-32V

R23



- OSRAM 1W LEDs
- Square or round
- Protected to IP68

- Black diecast aluminium housing & PC lens
- E-Marked R10 EMC, R23 Reverse

	ROUND	SQUARE	LUMENS	WATTS	QTY
3" work lamp	0-420-02	0-420-06	900LM	12W	1
3.5" work lamp	0-420-03	0-420-07	1200LM	16W	1

REVERSING WORK LAMP



Approved



Flood/Spot Combo



LED

1600LM

IP69K

R10

- 16 x 3W LED work/reverse lamp with Flood/Spot combo beam
- Cast aluminium case & PC lens
- Supplied with stainless steel bracket and 300mm flying lead
- L 109 x W 41 x H 135mm
- ECE R10 & R23 approved

PART NO.	DESCRIPTION	QTY
0-420-48	Reverse lamp	1

COMPACT REVERSE WORK LAMP



Approved



LED

1440LM

IP68

R10

- 6 x 3W CREE LEDs
- Stainless steel bracket
- Aluminium housing with polycarbonate lens
- L 76 x W 42 x H 90mm
- CE, E-Marked R10, R23 Reverse

PART NO.	DESCRIPTION	QTY
0-420-39	Reverse lamp	1

REVERSE WORK LAMP



Approved



LED

1440LM

IP68

R10

- 6 x 3W CREE LEDs
- Stainless steel bracket
- Aluminium housing with polycarbonate lens
- L 150 x W 56 x H 52.5mm
- CE, E-Marked R10, R23 Reverse

PART NO.	DESCRIPTION	QTY
0-420-38	Reverse lamp	1

BULB WORK LAMP

POWERFUL 35W 12/24V HID XENON WORK LAMP



✂ Supplied with Xenon bulb.

IP65

12/24V

- Black nylon plastic body
- Stainless steel bracket
- L 120 x W 135 x H 160mm

- Glass lens
- 250mm flying lead
- Internal ballast

PART NO.	DESCRIPTION	QTY
0-538-53	35W 12/24V HID Xenon work lamp	1

LIGHTING WORK LAMPS LED FORKLIFT WORK LAMPS


FORKLIFT WORK LAMPS

LINE SPOT LAMPS



LED IP67 10/80V

- 3 x 3W
- Clear outline for your forklift
- 50,000 hours lifespan
- Protected to IP67
- Polycarbonate lens and die cast aluminium housing
- E-Marked R10 & EMC approved



BLUE	RED	DESCRIPTION	QTY
0-420-49	0-420-85	Line LED spot lamp	1

ARC LED WORK LAMPS



LED 255LM 10-80V

- 'U' shape beam provides 180° zone warning coverage
- 10W OSRAM LED
- Protected to IP67
- Die-cast aluminium housing with polycarbonate lens
- Stainless steel bracket
- CE, E-Marked R10.05 EMC



BLUE	RED	DESCRIPTION	QTY
0-420-21	0-420-42	Arc forklift lamp	1

LED SPOT LAMPS

LED 1000LM IP68 10-48V

- 1000 lumens
- L 98 x W 80 x H 70mm
- Die cast aluminium housing
- Protected to IP68
- CE approved



BLUE	RED	DESCRIPTION	QTY
0-420-75	0-420-83	LED spot lamp	1

ARROW LED SPOT LAMP

LED IP67 10-60V

- Light visible up to 15 meters away
- Die cast aluminium housing
- Protected to IP67
- L 72.7 x W 75 x H 97.5mm
- E -Marked, ECE R10 EMC



BLUE	RED	DESCRIPTION	QTY
0-420-84	0-420-14	Arrow LED spot lamp	1

BRACKETS

MAGNETIC BASE

- Magnetic base for bulb spot work lamps



PART NO.	DESCRIPTION	QTY
0-537-54	Magnetic base	1

UNIVERSAL SWIVEL BRACKET

- 360° swivel bracket with M8 thread and rubber gasket

 Fits most work lamps.



PART NO.	DESCRIPTION	QTY
0-420-36	Universal swivel bracket	1

SPIGOT MOUNT

- Spigot mount with DIN connector for 0-420-44/45/46/47/48 0-420-65/66 0-420-86/0-420-87
- With 10cm cable and connectors



PART NO.	DESCRIPTION	QTY
0-420-98	Spigot mount	1

INTERIOR/EXTERIOR LIGHTS

LATEST ADDITIONS

- ✓ Perfect for refrigerated trailers
- ✓ CE approved

LINEAR INTERIOR LIGHTS




1ft, 2ft & 3ft

LED

IP67

9-30V

- Ultra bright white SMD LEDs
- With or without switch
- Clear PC lens with Aluminium base
- Protected to IP67
- E-Marked, EMC R10 approved



WITH SWITCH	NO SWITCH	DESCRIPTION		WATT	LUMENS	QTY
0-668-21	0-668-41	L 380 x W 25 H 13mm (1ft)	Small	6.2W	400LM	1
0-668-22	0-668-42	L 620 x W 25 H 13mm (2ft)	Medium	12.4W	790LM	1
0-668-23	0-668-43	L 1120 x W 25 H 13mm (4ft)	Large	15.3W	1200LM	1

ANGLED SCENE LIGHTS

SMD LED 10-30V ANGLED SCENE LIGHTS



40° Angle



LED

10-30V

IP68

- 10-30VDC
- 40° angled scene light
- White SMD 1W LEDs
- Protected to IP68
- CE, RoHS, ECE R10 approved

PART NO.	DESCRIPTION		WATT	LUMENS	QTY
0-668-55	L 129 x W 68 x H 46mm	Small	9 x 1W	725LM	1
0-668-56	L 229 x W 68 x H 46mm	Medium	18 x 1W	1450LM	1
0-668-57	L 329 x W 68 x H 46mm	Large	27 x 1W	2175LM	1

10-30V EXTERIOR LAMP



LED

400LM

IP65

- 6 LEDs
- 10-30V
- Polycarbonate housing and lens
- L 202 x W 72 x H 35mm

PART NO.	DESCRIPTION	QTY
0-668-66	6-LED lamp	1

LIGHTING INTERIOR/EXTERIOR LIGHTS

45° ANGLED SCENE LIGHTS

LED

12/24V

IP67

- 12/24V
- 45° angled scene light
- White SMD LEDs
- Protected to IP67
- E-Marked, EMC R10 approved



45° Angle

PART NO.	DESCRIPTION	LEDS	WATT	LUMENS	QTY
0-668-51	L 205 x W 60 x D 34mm Medium	32	6.4W	150LM	1
0-668-52	L 205 x W 60 x D 34mm With touch button	32	6.4W	150LM	1
0-668-53	L 300 x W 60 x D 34mm Large	60	12W	580LM	1

ROUND/CIRCULAR LIGHTS

72-LED SLIM ROOF LAMP

LED

1150LM

12/24V

IP66

- Ø 197mm x H 10mm
- Bright white LEDs, surface mounting in white plastic



PART NO.	DESCRIPTION	QTY
0-668-40	Slim roof lamp	1

21-LED ROUND ROOF LAMP WITH PIR

LED

1400LM

12/24V

IP67

- Ø 160.2mm x D 14.1mm
- Bright white SMD LEDs
- EMC R10 approved



PART NO.	DESCRIPTION	QTY
0-668-18	PIR sensor roof lamp	1

21-LED ROUND ROOF LAMP

LED

410LM

12/24V

IP67

- Ø 155mm, D 15.7mm
- Bright white SMD LEDs
- EMC R10 approved
- White plastic bezel (mounting bezel 0-668-99)



PART NO.	DESCRIPTION	QTY
0-668-06	Slim circular roof lamp	1

24-LED ROUND ROOF LAMPS

LED

1780LM

12/24V

IP67

- Ø 130mm x D 16.5mm
- Mega power white SMD LEDs
- ADC12 (aluminium) housing and polycarbonate lens
- EMC, R10 approved



DESCRIPTION	NO SWITCH	PIR SWITCH	QTY
White roof lamp	0-668-27	0-668-29	1

LIGHTING INTERIOR/EXTERIOR LIGHTS

36-LED ROUND ROOF LAMP

LED 576LM 12/24V IP66



- Ø 129mm, D 9mm
- White SMD LEDs
- Protected to IP66
- CE

PART NO.	DESCRIPTION	QTY
0-668-10	Slim roof lamp	1

117-LED ROOF LAMP WITH SWITCH

LED 338LM 12/24V



- Ø 107mm x H 23mm
- White LEDs
- Integral switch
- Polycarbonate housing

PART NO.	DESCRIPTION	QTY
0-668-13	Interior lamp	1

10-LED ROUND ROOF LAMP

LED 665LM 12/24V IP67



- Ø 75mm, Depth 8.7mm
- SMD LEDs
- White plastic bezel
- EMC R10 approved

PART NO.	DESCRIPTION	QTY
0-668-11	Slim roof lamp	1

LED DOWNLIGHTERS

LED 12/24V



- Ø 77mm x D 26mm
- White plastic with detachable bezel & switch

 **Recessed or surface mounting.**

WHITE	SILVER	QTY
0-668-03	0-668-04	1

12-LED DOWNLIGHTER

LED 192LM 12/24V IP66



- Ø 69mm x D 9.6
- 6 red LEDs - night light facility
- Warm white LEDs
- Surface mounting in white plastic

PART NO.	DESCRIPTION	QTY
0-668-05	Downlighter	1

OVAL/RECTANGULAR LIGHTS

POPULAR 12/24V ROOF LAMP WITH 120 LEDs

LED 12/24V 480LM



L 129 x W 77 x H 21mm

- 120 white LEDs
- White polycarbonate housing & lens
- Surface mount
- Integral rocker switch and flying leads

PART NO.	DESCRIPTION	QTY
0-668-14	Slim 12/24V roof lamp	1

SLIM 12/24V LED ROOF LAMP WITH 96 LEDs

LED 12/24V 672LM



L 292 X W 93 X H 15mm

- Integral switch
- CE approved
- 96 bright white LEDs
- Surface mounting
- Aluminium body, white plastic ends

PART NO.	DESCRIPTION	QTY
0-668-25	Slim 12/24V roof lamp	1

12/24V LED ROOF LAMP WITH SWITCH

LED 12/24V 960LM



L 175 x W 175 x H 23mm

- 60 bright white LEDs
- Surface mounting, in white plastic
- Integral switch
- 6 red LEDs night light facility

PART NO.	DESCRIPTION	QTY
0-668-30	Slim 12/24V LED roof lamp	1

22 WHITE SMD LED ROOF LAMP

LED 12/24V 195LM



L 160 x W 54 x D 12mm

- 12/24V
 - 22 white SMD LEDs
 - Protected to IP67
 - E-Marked, EMC R10 approved
-  **Perfect for refrigerated trailers.**

PART NO.	DESCRIPTION	QTY
0-668-92	Roof lamp with PIR switch	1

LIGHTING INTERIOR/EXTERIOR LIGHTS

WHITE 12/24V LED ROOF LAMPS

LED IP67 12/24V

- White SMD LEDs
- ADC12 (aluminium) housing and polycarbonate lens
- Protected to IP67
- EMC, R10 approved

Perfect for refrigerated trailers.



NO SWITCH	TOUCH BUTTON	PIR SWITCH	DESCRIPTION	LUMENS	QTY
0-668-67	0-668-68	0-668-69	L 135.8 x W 65.8 x D 16mm	12 white LEDs	950LM
0-668-87	0-668-88	0-668-89	L 186 x W 65.8 x D 16mm	18 white LEDs	1330LM

SLIM 12V/24V LED ROOF LAMPS WITH FROSTED LENS

LED 12/24V R10

PART NO.	DESCRIPTION	LUMENS	QTY
0-668-73	L 465 x W 90 x H 12mm	138 LEDs	1260LM
0-668-76	L 374 x W 145 x H 12mm	108 LEDs	587LM



- Indirect square LEDs
- On/off switch
- ECE R10 approved
- Aluminium body, frosted lens

LINEAR INTERIOR LIGHTS

12/24V LED ROOF LAMPS WITH SWITCH

LED 12/24V

- Aluminium base

PART NO.	DESCRIPTION	LUMENS	QTY
0-668-32	L 160 x W 40 x H 24mm	18 LEDs	210LM
0-668-33	L 260 x W 40 x H 24mm	36 LEDs	430LM
0-668-34	L 560 x W 40 x H 24mm	94 LEDs	1120LM



12-LED BATTEN ROOF LAMP

LED 12/24V

- Integral switch
- Bright white LEDs, 2500 lux
- 22mm deep
- Aluminium body with white plastic ends
- Surface mounting
- L 588 x W 40 x H 22mm



PART NO.	DESCRIPTION	QTY
0-668-35	Slim 12W LED batten roof lamp	1

LIGHTING INTERIOR/EXTERIOR LIGHTS

72-LED ROOF LAMP WITH SWITCH

LED

12//24V

L 368 x W 45 x H 10mm



- Low current draw 0.4A at 12/24V DC
- White aluminium housing
- 10mm deep
- Integral on/off switch
- Surface mounting
- 1060 lux

PART NO.	DESCRIPTION	QTY
0-668-37	Slim 12V LED linear roof lamp	1

R10 12/24V LED ROOF LAMPS WITH SWITCH

LED

1200LM

IP67

12/24V



- SMD LEDs, white bezel
- EMC R10 approved
- Integral switch
- Supplied with a 100mm cable

✂ Extra bright.
✂ Perfect for refrigerated trailers.

PART NO.	DESCRIPTION	LEDS	LUMENS	QTY
0-668-80	L 400 x W 17 x H 25mm	18	1200LM	1
0-668-81	L 245.1 x W 17 x H 25mm	9	600LM	1

WHITE SMD LED ROOF LAMPS

LED

12/24V

IP67



- White SMD LEDs
- E-Marked EMC R10 approved

NO SWITCH	TOUCH BUTTON	DESCRIPTION	LEDS	LUMENS	QTY
0-668-93	0-668-94	L 320 x W 54 x D 12mm	58	550LM	1
0-668-95	-	L 600 x W 54 x D 12mm	134	820LM	1

OTHER INTERIOR LAMPS & ACCESSORIES

12V LED MAP LIGHTS

LED



- Switch on lamp head with 325mm flexible arm
- 12 bright white LEDs
- 6 red LEDs - night light facility

PART NO.	DESCRIPTION	QTY
0-669-13	12V LED map light	1
0-669-25	24V LED map light	1

12/24V PIR SENSOR



L 110 x H 50 x W 22mm

IP67

12/24V

- Easy to install
- Slim built-in PIR sensor
- Switch with 35 second timer
- 90° detection angle
- 5m detection distance
- CE, ECE EMC R10 approved

PART NO.	DESCRIPTION	QTY
0-743-23	12/24V PIR sensor	1



Durite vehicle lights are available in 12V and 24V and cover most applications and budgets. Offering several shapes, light outputs and fixtures, the Durite range is one of the most versatile on the market.

durite.co.uk

REAR COMBINATION LIGHTS

CURRENT LOADING BALLASTS

Current loading ballast for 12V and 24V LED indicators

DESCRIPTION	FOR 12V	FOR 24V	QTY
Current loading ballast	0-097-62	0-097-74	1



8 FUNCTION REAR COMBINATION LAMPS

24V LED COMMERCIAL REAR LAMPS

24V LED stop/tail/fog/side marker/direction indicator/reflex reflector/reverse/number plate light (NPL)

LED

- Supplied with 1 metre flying lead
- L 515 x W 90 x H 130mm
- ECE approved

DESCRIPTION	RIGHT	LEFT (NO NPL)	QTY
Rear Lamp	0-069-50	0-069-51	1



COMMERCIAL REAR LAMPS

Stop/tail/direction indicator/fog/reflex reflector/side marker/reverse/number plate light (NPL)

- Supplied without bulbs
- Suitable replacement for Mercedes Actros
- L 515 x W 90 x H 141mm
- ECE approved

DESCRIPTION	RIGHT	LEFT (NO NPL)	QTY
Rear Lamp	0-074-00	0-074-01	1
Replacement Lens	0-074-98	0-074-99	1



Actros

COMMERCIAL TRAILER REAR LAMPS

Stop/tail/fog/side marker/direction indicator/triangle reflex reflector/reverse/number plate light (NPL)

- L 418 x W 90 x H 148mm
- ECE approved

DESCRIPTION	RIGHT	LEFT	QTY
Rear Lamp	0-080-00	0-080-01	1
Replacement Lens	0-080-98	0-080-99	1



LIGHTING REAR COMBINATION LIGHTS 6/7 FUNCTION REAR COMBINATION LAMPS
6/7 FUNCTION REAR COMBINATION LAMPS
COMMERCIAL LED REAR LAMPS

LED IP67 12/24V

Progressive indicator

Durable lens
Stop/tail/progressive direction indicator/fog/reverse/reflex reflector

- Supplied with 300mm flying leads
- L 284 x W 100 x H 37mm
- Halo design
- ECE approved
- Waterproof to IP67



DESCRIPTION	RIGHT	LEFT	QTY
LED Rear Lamp	0-071-60	0-071-61	1

LED REAR COMBINATION LAMPS

LED

Progressive indicator
Stop/tail/progressive direction indicator/reverse/reflex reflector/fog

- 10-30V
- L 284 x W 37 x H 100mm
- Protected to IP67
- Supplied with 500mm flying leads
- E-Marked

DESCRIPTION	RIGHT	LEFT	QTY
LED Rear Lamp	0-071-64	0-071-65	1

UNIVERSAL LED REAR COMBINATION LAMP

LED IP67 12/24V

Universal
Stop/tail/direction indicator/reverse/reflex reflector/fog

- Supplied with 500mm flying leads
- L 350 x W 85 x H 128mm
- Protected to IP67
- CE, ECE approved, E-Marked

PART NO	DESCRIPTION	QTY
0-071-10	Universal LED rear lamp	1
0-071-00	Bulb rear lamp	1
0-071-01	Bulb with connector	1
0-071-02	Bulb with reflex reflector & connector	1

⚠ Lens only for 0-071-10, order 0-071-96 | Lens only for 0-071-00, order 0-071-99
Lens only for 0-071-02, order 0-071-98.

UNIVERSAL COMMERCIAL REAR LAMPS

LED

Universal
Stop/tail/fog/direction indicator/reflex reflector/reverse, pre-wired

- 24V LED
- L 341 x W 61 x H 132mm
- ECE approved

DESCRIPTION	UNIVERSAL	WITH NPL	QTY
Rear Lamp	0-085-50	0-086-50	1

LIGHTING REAR COMBINATION LIGHTS 6/7 FUNCTION REAR COMBINATION LAMPS

12/24V 6-FUNCTION COMMERCIAL LAMPS

Stop/tail/direction indicator/fog/reverse/reflex reflector/
with or without number plate light (NPL)

- Mercedes Sprinter / VW
- L 400 x W 160 x H 88.5mm
- ECE approved

DESCRIPTION	RIGHT	LEFT	QTY
Rear Lamp	0-081-02	0-081-03	1
Replacement Lens	0-081-98	0-081-99	1



Number
plate light
available

COMMERCIAL REAR LAMPS

Stop/tail/direction indicator/fog/reflex reflector/reverse

- Supplied without bulbs
- Replaces Iveco Daily, 6-pin plug
- L 303 x W 85 x H 130mm
- ECE approved

DESCRIPTION	RIGHT	LEFT	QTY
Rear Lamp	0-077-02	0-077-03	1
Replacement Lens	0-077-98	0-077-99	1



12/24V LED TRAILER LIGHTS

LED

IP65

12/24V

Stop/tail/fog/direction indicator/reflex reflector and number plate light (NPL)

- L 245 x W 41 x H 150mm
- ECE approved, E-Marked
- Protected to IP65
- Supplied with 300mm flying leads

DESCRIPTION	RIGHT	LEFT	QTY
12/24V Trailer Light	0-071-20	0-071-21	1



24V 6 OR 7-FUNCTION COMMERCIAL LAMPS

LED

Stop/tail/direction indicator/fog/reverse/reflex reflector/
with or without number plate light (NPL)

- Volvo & Renault
- L 500 x W 130 x H 86mm
- ECE approved

DESCRIPTION	RIGHT	LEFT (NO NPL)	LENS	QTY
Rear Lamp	0-071-40	0-071-41	0-071-97	1



24V 6 OR 7-FUNCTION COMMERCIAL LAMPS

LED

Stop/tail/direction
indicator/fog/reverse/reflex
reflector/with or without
number plate light (NPL)

- Iveco
- L 400 x W 160 x H 84mm
- ECE approved

DESCRIPTION	RIGHT	LEFT (NO NPL)	LEFT	QTY
Rear Lamp	0-077-20	0-077-21	0-077-22	1
Replacement Lens	0-077-95	0-077-96		1



LIGHTING REAR COMBINATION LIGHTS 5 FUNCTION REAR COMBINATION LAMPS
LED TRIANGLE TRAILER LIGHTS WITH PROGRESSIVE DIRECTION INDICATOR


LED

IP65

12/24V


**Progressive
indicator**
Stop/tail/fog/progressive direction indicator/reflex reflector and number plate light (NPL)

- L 172 x W 40 x H 152mm
- Supplied with 140mm flying leads
- E-Marked
- Protected to IP65

DESCRIPTION	RIGHT	LEFT	QTY
Triangle Trailer Light	0-300-60	0-300-61	1

5 FUNCTION REAR COMBINATION LAMPS
UNIVERSAL LED REAR COMBINATION LAMP


LED

IP67

12/24V


**Progressive
indicator**

**Universal
indicator**
Stop/tail/direction indicator/reflex reflector/fog

- 10-30V
- L 220 x W 34.4 x H 100mm
- Protected to IP67
- Supplied with 500mm flying leads
- E-Marked

PART NO.	DESCRIPTION	QTY
0-071-55	Universal Lamp	1

12/24V LED REAR COMBINATION LAMP


LED

IP67

12/24V

Stop/tail/direction indicator/reverse and reflex reflector functions

- Supplied with 280mm flying leads
- L 296 x W 30 x H 94mm
- ECE approved
- Protected to IP67

PART NO.	DESCRIPTION	QTY
0-300-20	Rear lamp	1

LED TRAILER LIGHTS WITH PROGRESSIVE INDICATOR


LED

IP65

12/24V


**Progressive
indicator**
Stop/tail/progressive direction indicator/reflex reflector and number plate light (NPL)

- Supplied with 300mm flying leads
- L 118 x W 46 x H 93mm
- ECE approved, E-Marked
- Protected to IP65

DESCRIPTION	RIGHT	LEFT	QTY
Rear lamp	0-294-60	0-294-61	1

LIGHTING REAR COMBINATION LIGHTS 4 FUNCTION REAR COMBINATION LAMPS

LED REAR COMBINATION LAMP

LED IP66 12/24V

Stop/tail/direction indicator/reflex reflector/number plate light (NPL)

- Protected to IP66
- Supplied with 300mm fly leads
- E-Marked

PART NO.	DESCRIPTION	QTY
0-294-80	Universal rear lamp	1



Universal

140MM ROUND LED REAR COMBINATION LAMP

LED IP67/IP69K 10-30V

Stop/tail/direction indicator/fog/reflex reflector

- Protected to IP67/IP69K
- Supplied with 300mm fly leads
- Graphene housing & polycarbonate lens
- E-Marked

PART NO.	DESCRIPTION	QTY
0-097-55	Universal rear lamp	1



Universal



12/24V LED REAR COMBINATION LAMP

LED IP67 10-30V

Stop/tail/direction indicator/reflex reflector/number plate light (NPL)

- Protected to IP67
- ABS housing and PMMA lens
- L 105 x W 95 x H 38mm
- E-Marked, UKCA

PART NO.	DESCRIPTION	QTY
0-295-65	Universal rear lamp	1



Number plate light available



4 FUNCTION REAR COMBINATION LAMPS

12/24V LED REAR COMBINATION LAMP

LED IP67 10-30V

Rear fog/tail/reverse/reflex reflector

- Protected to IP67
- ABS housing and PMMA lens
- L 105 x W 95 x H 38mm
- E-Marked, UKCA

PART NO.	DESCRIPTION	QTY
0-295-66	Universal rear lamp	1



Universal



LIGHTING REAR COMBINATION LIGHTS 4 FUNCTION REAR COMBINATION LAMPS

10-30V UNIVERSAL LED REAR COMBINATION LAMP



LED

IP67

10-30V

Stop/tail/direction indicator/reflex reflector

- L 150 x W 80.3 x H 26mm
- Protected to IP67
- E-Marked R10, R140, R150

PART NO.	DESCRIPTION	QTY
0-300-30	Rear lamp	1

WATERPROOF 12V COMBINATION REAR LAMPS

IP67



Stop/tail/direction indicator/reflex reflector

- Supplied with 12V bulbs & waterproof cable gland
- L 200 x W 60 x H 92mm
- Protected to IP67
- ECE approved

JCB
(0-011-44)

Connection for

DESCRIPTION	UNIVERSAL	WITH JCB CONNECTOR	QTY
Rear Lamp	0-295-00	0-295-50	1
Replacement Lens	0-295-99		1

12/24V LED REAR COMBINATION LAMP



LED

IP67

12/24V

Stop/tail/direction indicator and reflex reflector functions

- L 245 x W 31.5 x H 109mm
- Supplied with 400mm flying leads
- ECE approved
- Protected to IP67

PART NO.	DESCRIPTION	QTY
0-300-75	Rear lamp	1

12/24V LED REAR COMBINATION LAMP



LED

IP67

12/24V

Stop/tail/direction indicator and reflex reflector functions

- L 157.5 x W 30.9 x H 81.2mm
- Supplied with 400mm flying leads
- ECE approved
- Protected to IP67

PART NO.	DESCRIPTION	QTY
0-300-10	Rear lamp	1

IP67 12/24V LED REAR COMBINATION LAMP



LED

IP67

12/24V

Stop/tail/direction indicator and reflex indicator functions

- L 195 x W 30 x H 94mm
- Supplied with 280mm flying leads
- ECE approved
- Protected to IP67

PART NO.	DESCRIPTION	QTY
0-300-25	Rear lamp	1

12/24V LED REAR COMBINATION LAMPS



LED

IP67

12/24V

Stop/tail/direction indicator and reverse functions

- L 200 x W 25 x H 50mm
- Supplied with 800mm flying leads
- ECE approved
- Protected to IP67

DESCRIPTION	RIGHT	LEFT	QTY
Rear Lamp	0-300-14	0-300-15	1

LIGHTING REAR COMBINATION LIGHTS 3 FUNCTION REAR COMBINATION LAMPS

COMMERCIAL REAR COMBINATION LAMPS

Stop/tail/direction indicator and reflex reflector functions

- L 300 x W 105 x H 128mm
- ECE approved

DESCRIPTION	LEFT	RIGHT	QTY
For Iveco Daily	0-076-01	0-076-00	1
Replacement lens	0-076-99	0-076-98	1



 Connection for



Daily

UNIVERSAL LED REAR COMBINATION LAMP



LED

12/24V

Stop/tail/direction indicator/reflex reflector

- L 170 x W 33 x H 92mm
- ECE approved

PART NO.	DESCRIPTION	QTY
0-300-50	Rear combination lamp	1

UNIVERSAL 12/24V REAR COMBINATION LAMP



Stop/tail/direction indicator/number plate illumination

- Supplied with 12V bulbs
- L 167 x W 50 x H 82.5mm
- ECE approved

DESCRIPTION	UNIVERSAL	LENS	QTY
Rear Lamp	0-300-00	0-300-97	1

 LOOKING FOR? 5-function in the same size. See page 81.

3 FUNCTION REAR COMBINATION LAMPS

95MM REAR LAMP



LED

12/24V

Stop/tail/direction indicator

- E-Marked, R10 EMC
- Ø 95mm x D 80mm
- Protected to IP67
- Supplied with 300mm flying leads

PART NO.	DESCRIPTION	QTY
0-767-40	Universal lamp	1

140MM REAR LAMP



LED

12/24V

Stop/tail/direction indicator

- E-Marked, R10 EMC
- Ø 140mm x D 85.8mm
- Protected to IP67
- Supplied with 300mm flying leads

PART NO.	DESCRIPTION	QTY
0-097-50	Universal lamp	1

UNIVERSAL LED REAR LAMP



LED

12/24V

Stop/tail/direction indicator

- ECE approved
- Ø 140mm x D 100mm
- 20 LEDs
- Protected to IP68

PART NO.	DESCRIPTION	QTY
0-097-30	Universal lamp	1

LIGHTING REAR COMBINATION LIGHTS 3 FUNCTION REAR COMBINATION LAMPS
LOOKING FOR?

Matching single function vehicle lights. See bottom of page 84.

12/24V LED REAR LAMP


LED

12/24V

Stop/tail/direction indicator

- ECE and EEC approved
- L 95 x W 32 x H 95mm

PART NO.	DESCRIPTION	QTY
0-294-75	Rear Lamp	1

12/24V LED REAR LAMPS


LED

IP67

12/24V

Stop/tail/indicators

- Ø 95mm
- Protected to IP67
- Supplied with 500mm flying leads
- Acrylic lens and polycarbonate housing
- ECE approved

STOP/TAIL INDICATOR	TAIL/FOG/REVERSE	MOUNTING BEZEL	QTY
0-767-60	0-767-70	0-767-97	1

2 FUNCTION FRONT COMBINATION LAMP
FRONT SIDE LAMP AND DIRECTION INDICATOR

- Supplied without bulbs
- L 180 x W 51.5 x H 60mm
- ECE approved

PART NO.	DESCRIPTION	QTY
0-311-00	Front side lamp and D.I	1
0-311-99	Replacement lens	1



SINGLE FUNCTION VEHICLE LIGHTS INDIVIDUAL VEHICLE LIGHTS

95MM COMMERCIAL LED LAMPS

Stop and Tail

Indicator

Fog

Reversing

LED

12/24V

- Ø 95mm
- 10-30VDC
- Protected to IP67
- Supplied with 300mm flying lead
- E-Marked

LOOKING FOR?

 3-function lamps in the same size.
See page 83

DESCRIPTION	STOP/TAIL	INDICATOR	REAR FOG	REVERSE	QTY
95mm	0-767-44	0-767-41	0-767-42	0-767-43	1

LIGHTING SINGLE FUNCTION VEHICLE LIGHTS INDIVIDUAL VEHICLE LIGHTS

140MM COMMERCIAL LED LAMPS

LED 12/24V

- Ø 140mm
- 10-30VDC
- Protected to IP67
- Supplied with 300mm flying lead
- E-Marked



Stop and Tail



Indicator



Fog



Reversing

DESCRIPTION	STOP/TAIL	INDICATOR	REAR FOG	REVERSE	QTY
140mm	0-097-54	0-097-51	0-097-52	0-097-53	1

LOOKING FOR?
5-function lamps in the same size. See page 81.
3-function lamps in the same size. See page 83.

REAR LED TAIL LAMPS

LED IP67 12/24V

- 36 LEDs
- E-Marked
- PC Lens and ABS Housing
- L 94 x W 29 x H 94mm



Stop and Tail



Indicator



Fog



Reversing

STOP/TAIL	INDICATOR	REAR FOG	REVERSE	QTY
0-294-30	0-294-31	0-294-32	0-294-33	1

140MM COMMERCIAL LED LAMPS

LED 12/24V

- Black plastic body
- ECE approved
- Ø 140mm x W 82mm
- Stud fixing



Fog



Reversing

REAR FOG	REVERSE	QTY	LOOKING FOR?
0-097-78	0-097-68	1	Matching rear combination lamps. See page 83.

SQUARE SURFACE-MOUNTED LAMP

- Supplied without SCC bulb
- L 106 x W 57 x H 98mm
- Surface mount, with adjustable pad to vary angle when fitted
- Fog light, E-Marked



PART NO.	DESCRIPTION	QTY
0-063-02	Rear Fog Lamp	1



@ WWW.DURITE.CO.UK

+44 (0) 1255 555 200

SALES@DURITE.CO.UK

MARKER LAMPS

LED MARKER LAMPS

GREAT VALUE 12/24V LED MARKER LAMPS




LED

- 2 x SMD LED
- Protected to IP67
- Supplied with 150mm flying leads
- L 100 x W 8 x H 41mm
- E-Marked, R10 EMC



DESCRIPTION	AMBER SIDE	RED REAR	WHITE FRONT	QTY
12/24V marker lamp	0-170-90	0-170-85	0-170-80	1
Mounting bracket		0-170-98		1

12/24V LED MARKER LAMPS



LED

12/24V

- ECE approved
- With leads
- Mounting bracket available
- L 111 x W 22 x H 50mm



DESCRIPTION	AMBER	RED	WHITE	QTY
Marker Lamp	0-170-70	0-170-65	0-170-60	1
Horizontal Bracket		0-170-99		1

12/24V LED HALO RING MARKER LAMPS



LED

IP67

12/24V

- 12/24V marker lamp with 2 SMD LEDs, halo rings and reflex reflector
- Protected to IP67
- ECE approved, E-Marked
- L 116 x W 17.8 x H 47mm



DESCRIPTION	AMBER	RED	WHITE	QTY
Marker Lamp	0-171-80	0-171-75	0-171-70	1
Bracket		0-171-98		1

MARKER LAMPS WITH ADR APPROVAL



Approved

NEW



LED

IP68

10-36V

- 12 SMD LEDs
- 450mm flying leads
- E-Marked, ADR approved
- L 126 x W 26 x H 51mm

DESCRIPTION	AMBER	RED	WHITE	QTY
ADR marker lamp	0-169-10	0-169-05	0-169-00	1
Underslung bracket		0-169-97		1
Flat bracket		0-169-96		1



ADR approval shows the unit is sealed, intrinsically safe & ideal for vehicles transporting dangerous goods.

12/24V LED MARKER LAMPS



LED

IP67

12/24V

- Protected to IP67
- ECE approved
- 'Superseal' plug
- Requires connector 0-011-62
- L 121 x W 17 x H 44mm
- Reflex reflector



DESCRIPTION	PART NO.		QTY
	WITH SUPERSEAL PLUG	WITH LEADS	
Amber marker lamp	0-171-10*	0-171-60	1
Amber side marker with bracket	0-171-11*	0-171-61	1
Clear front marker	0-171-00*	0-171-50	1
Red rear marker	0-171-05*	0-171-55	1

*With superseal connector.

Requires Connector 0-011-62.

LIGHTING MARKER LAMPS LED MARKER LAMPS

25MM LED MINI AMBER LAMP

LED

12/24V

- Ø 25mm
- 1 x SMD Amber LED
- Polycarbonate
- 200mm flying lead
- E-Marked R91 and R10



PART NO.	DESCRIPTION	QTY
0-170-58	Amber marker lamp	1

12/24V LED MARKER LAMPS

LED

12/24V

- ECE approved
- With leads
- L 55 x W 27 x H 35mm



PART NO.	DESCRIPTION	QTY
0-170-30	Amber	1
0-170-25	Red	1

12/24V LED MARKER LAMPS

LED

12/24V

- ECE approved
- With superseal plug
- Requires connector 0-011-62
- L 71 x W 25 x H 42mm



PART NO.	DESCRIPTION	QTY
0-170-10	Amber Side	1
0-170-05	Red Rear	1
0-170-00	White Front	1
0-170-04	Green ABS	1

12/24V LED MARKER LAMPS

LED

- L 120 x W 21 x H 63mm
- EEC and ECE approved
- Reflex reflector
- With leads

DESCRIPTION	AMBER SIDE	RED REAR	WHITE FRONT	QTY
12V marker lamp	0-167-10	0-167-05	0-167-00	1
24V marker lamp	0-167-60	0-167-55		1



24V LED MARKER LAMPS

LED

- EEC and ECE approved
- Reflex reflector
- 'Superseal' plug
- Requires connector 0-011-62
- L 100 x W 21 x H 50mm

DESCRIPTION	AMBER SIDE	RED REAR	WHITE FRONT	QTY
24V marker lamp	0-168-60	0-168-55	0-168-50	1

DESCRIPTION	HORIZONTAL	VERTICAL	QTY
Mounting bracket	0-169-98	0-169-99	1



LIGHTING MARKER LAMPS

24V LED AMBER SIDE MARKER LAMPS



LED

- Reflex reflector
- L 108 x W 33 x H 58mm
- Screw cable connections
- EEC and ECE approved

 With screw cable connections.

DESCRIPTION	AMBER SIDE	RED REAR	WHITE FRONT	QTY
24V marker lamp	0-169-60	0-169-55	0-169-50	1

DESCRIPTION	HORIZONTAL	VERTICAL	QTY
Mounting bracket	0-169-98	0-169-99	1

LED 12/24V OUTLINE MARKER LAMPS

12/24V LED MARKER LAMPS



LED

12/24V

IP67

- Front, side and rear
- Protected to IP67
- E-Marked ECE R10.05 EMC

- Supplied with 50cm flying leads
- L 175 x H 109.5mm (L/R)
- L 85 x W 36 x H 100mm (Universal)



DESCRIPTION	LEFT HAND	RIGHT HAND	UNIVERSAL	QTY
Marker lamp	0-172-86	0-172-85	0-172-71	1

12/24V LED MARKER LAMPS WITH PARKING SENSOR



LED

IP68

12/24V

- Front, side and rear clearance markers
- Sensor distance of up to 2m
- Low Current Draw 0.05A at 12VDC

- PC Lens and ABS/rubber Housing
- E-Marked
- L 216 x W 37 x H 184mm

DESCRIPTION	LEFT HAND	RIGHT HAND	QTY
Marker lamp	0-172-81	0-172-80	1

12/24V ROUND MARKER LAMPS



LED

12/24V

IP68

- Protected to IP68
- ECE approved

- Supplied with 50cm flying leads

DESCRIPTION	LENGTH	RIGHT HAND	LEFT HAND	QTY
Short bent arm	L 146 x W 32 x H 145mm	0-172-40	0-172-41	1
Long bent arm	L 172 x W 34 x H 31mm	0-172-45	0-172-46	1
Short angled arm	L 109 x W 32 x H 138mm	0-172-30	0-172-31	1
Long angled arm	L 168 x W 39 x H 95mm	0-172-35	0-172-36	1
Short straight arm	L 90 x W 32 x H 85mm	0-172-20		1
Long straight arm	L 131 x W 32 x H 85mm	0-172-25		1

NUMBER PLATE LAMPS

12/24V NUMBER PLATE LAMP



LED 12/24V IP67

- Fixing centres 53mm
- Protected to IP67
- ECE approved
- ABS housing. Polycarbonate lens
- L 120 x W 58.5 x H 45mm

PART NO.	DESCRIPTION	QTY
0-453-70	Number plate lamp	1

12/24V NUMBER PLATE LAMP



LED 12/24V

- ECE approved
- Black plastic
- L 93 x W 30 x H 47mm

PART NO.	DESCRIPTION	QTY
0-453-80	Small number plate lamp	1

PLASTIC NUMBER PLATE LAMP



LED 12/24V IP67

- ECE approved
- Protected to IP67
- Fixing centres 84mm
- Supplied with 500mm flying leads
- L 105 x W 38 x H 48mm

PART NO.	DESCRIPTION	QTY
0-453-04	Number plate lamp	1

BLACK NUMBER PLATE LAMP



LED 12/24V

- 12/24V LED
- Fixing centres 53mm
- ECE and SAE approved
- L 120 x W 42 x H 46mm

PART NO.	DESCRIPTION	QTY
0-453-75	Number plate lamp	1

BLACK NUMBER PLATE LAMPS



- EEC and ECE approved
- Fixing centres 72mm
- L 102 x W 58 x H 45mm
- Supplied without festoon bulb

PART NO.	DESCRIPTION	QTY
0-453-51	Number plate lamp	1
0-453-50	Low profile version. 46mm depth, fixing centres 45mm	1

COMPACT NUMBER PLATE LAMP



- Fixing centres 68mm
- L 45 x W 38 x H 36mm
- Supplied without festoon bulb
- EEC, ECE and SAE approved

PART NO.	DESCRIPTION	QTY
0-453-52	Black plastic lamp	1

NUMBER PLATE LAMPS

- EEC, ECE and SAE approved
- Fixing centres 86mm
- Black plastic, chrome
- L 116 x W 38 x H 51mm
- Supplied with 12V MCC bulbs

PART NO.	DESCRIPTION	QTY
0-453-01	Black plastic number plate lamp	1
0-453-03	Chrome plated brass number plate lamp	1



Lucas replica.

HEADLAMPS

7" 70W LED HEADLAMP



Super Bright



LED R112 R7 4900LM IP67 12/24V

- 70W main beam (4900Lm)
- 55W dipped beam (3850Lm)
- 3W position light
- Protected to IP67
- Black, Aluminium housing & PC lens
- E-Marked R7, R112

PART NO.	DESCRIPTION	QTY
0-422-55	7" Headlamp	1

 **H4 to H13 adaptor included.**

LED HEAD LAMPS WITH DI & DRL

NEW



LED IP68 9-32V

Approved for right hand drive (RHD) vehicles

- High beam 2 x 30W (3500Lm)
- Low beam 1 x 30W (2500Lm)
- Direction Indicator - 12 x 1W
- Daytime Running Lamp - 2 x 5W
- With 6-PIN DT connector
- Aluminium housing with PC lens
- E-Marked R10, R112, R87 & R6

PART NO.	DESCRIPTION	QTY
0-422-20	Right side head light (RHD)	1
0-422-21	Left side head light (RHD)	1

 **Available for Left Hand Drive (LHD) Vehicles**
0-422-22 - Right side head light | 0-422-23 - Left side head light.



REFLECTORS

REFLECTORS

- 2 x 4mm screw holes
- L 85 x W 31 x H 5.5mm
- Black frame
- Acrylic lens
- ECE approved



DESCRIPTION	AMBER	RED	QTY
Reflector	0-505-30	0-505-25	1

SELF-ADHESIVE MOULDED REFLEX REFLECTORS


- White plastic base
- ECE and EEC approved
- Self-adhesive
- L 104 x W 51 x D 7mm
- Acrylic lens



PART NO.	DESCRIPTION	QTY
0-505-60	Amber reflex reflector	10
0-505-50	Clear reflex reflector	10
0-505-55	Red reflex reflector	10

SELF-ADHESIVE MOULDED REFLEX REFLECTORS

- Ø 55mm
- ECE approved



DESCRIPTION	AMBER	RED	WHITE	QTY
Reflex reflector	0-665-80	0-665-75	0-665-70	10

TWO-HOLE FIXING REFLECTOR

- Black polypropylene base
- 2-hole fixing
- L 94 x W 44 x H 6mm
- ECE approved



PART NO.	DESCRIPTION	QTY
0-507-10	Amber reflector	10

TWO-HOLE FIXING MOULDED REFLEX REFLECTORS

- Black polypropylene base
- ECE and EEC approved
- 2-hole fixing
- L 126 x W 51.5 x D 7mm
- Acrylic lens

DESCRIPTION	AMBER	RED	QTY
Reflex reflector	0-505-10	0-505-05	10



TRIANGLE MOULDED RED REFLEX REFLECTOR

- 2-hole fixing
- ECE and EEC approved
- L 138 x W 158 x D 8mm
- Acrylic lens



PART NO.	DESCRIPTION	QTY
0-229-00	Moulded acrylic red reflex reflector	4

SELF-ADHESIVE REFLEX REFLECTOR

- Moulded on back plastic base
- Ø 80mm
- ECE approved



PART NO.	DESCRIPTION	QTY
0-665-55	Red reflex reflector	10

BULBS & BULB HOLDERS

12V PROFESSIONAL BULBS - HEADLAMP & AUXILLIARY

BULB	DESCRIPTION	PACK 1	PACK 10	LED BULBS - PACKS OF 2			
				BLUE	RED	WHITE	YELLOW
207	12V 5W BA15S	7-002-07	8-002-07	L-002-07-B	L-002-07-R	L-002-07-W	L-002-07-Y
209	12V 5W BA15D	7-002-09	8-002-09	-	-	-	-
233	12V 4W BA9S	7-002-33	8-002-33	L-002-33-B	L-002-33-R	L-002-33-W	L-002-33-Y
239	12V 5W FESTOON 11 x 38mm	7-002-39	8-002-39	L-002-39-B	L-002-39-R	L-002-39-W	L-002-39-Y
245	12V 10W BA15S	7-002-45	8-002-45	-	-	-	-
265	12V 10W FESTOON 11 x 43mm	7-002-65	8-002-65	-	-	-	-
269	12V 10W FESTOON 11 x 30mm	-	-	L-002-69-B	L-002-69-R	L-002-69-W	-
286	12V W2 x 4.6D	7-002-86 (pack of 5)		L-002-86-B	L-002-86-R	L-002-86-W	-
286T	12V B8.5DTACHO	-	-	L-002-86-TB	-	L-002-86-TW	-
288	12V 2W BA9S	7-002-88	8-002-88	-	-	-	-
380	12V 21/5W BAY15D	7-003-80	8-003-80	-	L-003-80-R	L-003-80-W	-
380W	12V 21/5W W3 x 16Q 20mm CAPLESS	7-003-80W	8-003-80W	-	-	L-003-80-WW	-
382	12V 21W BA15S	7-003-82	8-003-82	L-003-82-B	L-003-82-R	L-003-82-W	L-003-82-Y
382W	12V 21W W3 x 16D 20mm CAPLESS	7-003-82W	8-003-82W	-	-	L-003-82-WW	-
382WA	12V 21W W3 x 16D 20mm CAPLESS Amber	7-003-82WA	8-003-82WA	-	-	-	-
433C	12V 6W BAX9S OSP HALOGEN	7-004-33C	8-004-33C	-	-	-	-
433D	12V 21W BAY9S OSP HALOGEN	7-004-33D	8-004-33D	-	-	-	-
434	12V 10W G4 CAPSULE HALOGEN	7-004-34	8-004-34	-	-	-	-
448	12V 55W H1 UV	7-004-48	8-004-48	L-004-48-B	-	L-004-48-W	-
453	12V 55W H3 UV HALOGEN	7-004-53	8-004-53	-	-	-	-
472	12V 60/55W H4 P43T UV	7-004-72	8-004-72	L-004-72-B	-	L-004-72-W	-
499	12V 55W H7 PX26D UV	7-004-99	8-004-99	-	-	L-004-99-W	-
501	12V 5W W2.1 x 9.5D 10mm	7-005-01	8-005-01	L-005-01-B	L-005-01-R	L-005-01-W	L-005-01-Y
501A	12V 5W W2.1 x 9.5D 10mm	7-005-01A	8-005-01A	-	-	-	-
504	12V 3W W2.1 x 9.5D 10mm	7-005-04	8-005-04	-	-	-	-
566	12V 21/4W BAZ15D	7-005-66	8-005-66	-	-	L-005-66-W	-
567	12V 21/5W BAW15D Red	7-005-67	8-005-67	-	-	-	-
581	12V 21 W BAU15S	7-005-81	8-005-81	-	-	-	L-005-81-Y
584	12V 21W BAW15S Red	7-005-84	8-005-84	-	-	-	-
896	12.8V 37.5W PGJ13 HALOGEN Clear	7-008-96	8-008-96	-	-	-	-
921B	12V 16W W2.1 x 9.5D 35mm	7-009-21B	8-009-21B	-	-	-	-
G41	12V G4 SMD LED	-	-	-	-	L-00G-41-W	-

BULB	DESCRIPTION	CANBUS PERFECT BULBS - PACK OF 2
		WHITE
C233	12V BA9S CANBUS PERFECT 8-LED	L-0C2-33-W
C239	12V FESTOON 11x38mm CANBUS PERFECT 3-LED	L-0C2-39-W
C433	12V BAX9S CANBUS PERFECT 8-LED	L-0C4-33CW
C501	12V W2.1 x 9.5D CANBUS PERFECT 8-LED	L-0C5-01-W

LED BULBS ARE NOT ROAD LEGAL

LIGHTING BULBS & BULB HOLDERS BULBS

REQUIRE A BULB DISPENSER RACK?

- ✓ High quality 12V or 24V bulb dispenser
- ✓ Dispenser includes 118 pieces
- ✓ H 320 x W 690 x D 120mm
- ✓ Standalone or wall mounted



7-999-12 | 12V bulb dispenser



7-999-24 | 24V bulb dispenser



Standalone
or wall
mounted

BULB	DESCRIPTION	PACK 1	PACK 10	LED BULBS - PACK OF 1			
				BLUE	RED	WHITE	YELLOW
9005	12V 60W HB3 RT/ANG	7-090-05	8-090-05	-	-	L-090-05-W	-
9006	12V 51W HB4 RT/ANG	7-090-06	8-090-06	-	-	L-090-06-W	-
H8	12V H10 PGJ19	-	-	-	-	L-00H-08-W	-
H9	12V H9 PGJ19	-	-	-	-	L-00H-09-W	-
H10	12V H10 PY20D	-	-	-	-	L-00H-10-W	-
H11	12V 55W H11 PGJ19-2	7-00H-11	8-00H-11	L-00H-11-B	-	L-00H-11-W	-

24V PROFESSIONAL BULBS - HEADLAMP & AUXILIARY

BULB	DESCRIPTION	PACK 1	PACK 10	LED BULBS - PACKS OF 2			
				BLUE	RED	WHITE	YELLOW
149	24V 5W BA15S	7-001-49	8-001-49	-	L-001-49-R	L-001-49-W	L-001-49-Y
150	24V 5W BA15D	7-001-50	8-001-50	-	-	-	-
241	24V 21W BA15S	7-002-41	8-002-41	-	-	L-002-41-W	L-002-41-Y
242	24V 5W FESTOON 11 x 38mm	7-002-42	8-002-42	L-002-42-B	L-002-42-R	L-002-42-W	-
246	24V 10W BA15S	7-002-46	8-002-46	-	-	L-002-46-W	-
249	24V 4W BA9S	7-002-49	8-002-49	L-002-49-B	-	L-002-49-W	-
274	24V 10W FESTOON 11 x 43mm	7-002-74	8-002-74	-	-	-	-
276	24V 15W FESTOON 15 x 43mm	7-002-76	8-002-76	-	-	-	-
289	24V 2W BA9S	7-002-89	8-002-89	-	-	-	-
334	24V 21/5W BAY15D	7-003-34	8-003-34	-	-	L-003-34-W	L-003-34-Y
345	28V 26W BA15S	7-003-45	8-003-45	-	-	-	-
346	24V 21W BA15D	7-003-46	8-003-46	-	-	-	-
433E	24V 21W BAY9S OSP HALOGEN	7-004-33E	8-004-33E	-	-	-	-
434F	24V 10W G4 CAPSULE HALOGEN	7-004-34F	8-004-34F	-	-	-	-
460	24V 70W H3 HALOGEN	7-004-60	8-004-60	-	-	-	-
466	24V 70W H1 HALOGEN	7-004-66	8-004-66	-	-	-	-
475	24V 75/70W H4 P43T HALOGEN	7-004-75	8-004-75	-	-	-	-
499A	24V 70W H7 XENON	7-004-99A	8-004-99A	-	-	-	-
505	24V 3W W2.1 x 9.5D 10mm	7-005-05	8-005-05	-	-	-	-
507	24V 5W W2.1 x 9.5D 10mm	7-005-07	8-005-07	L-005-07-B	L-005-07-R	L-005-07-W	L-005-07-Y
508	24V W2.4 x 4.6D	7-005-08 (pack of 5)		-	L-005-08-R	L-005-08-W	-
508T	24V B8.5DTACHO	-	-	-	-	-	L-005-08-TY
566A	24V 21/4W BAZ15D	7-005-66A	8-005-66A	-	-	-	-
581A	24V 21W BAU15S Amber	7-005-81A	8-005-81A	-	-	-	-
874	28V 7W BA15S	7-008-74	8-008-74	-	-	-	-
875	28V 7W BA15D	7-008-75	8-008-75	-	-	-	-
H11A	24V 70W H11 PGJ19-2 HALOGEN	7-00H-11A	8-00H-11A	-	-	-	-


LED BULBS ARE NOT ROAD LEGAL

LIGHTING BULBS & BULB HOLDERS BULBS


BULBS

LED BULBS ARE NOT ROAD LEGAL

BA15S BULBS




BULB	TYPE	PACK 1	PACK 10	LED			
				PACK 2 - BLUE	PACK 2 - RED	PACK 2 - WHITE	PACK 2 - YELLOW
207	12V, 5W	7-002-07	8-002-07	L-002-07-B	L-002-07-R	L-002-07-W	L-002-07-Y
245	12V, 10W	7-002-45	8-002-45	-	-	-	-
149	24V, 5W	7-001-49	8-001-49	-	L-001-49-R	L-001-49-W	L-001-49-Y
246	24V, 10W	7-002-46	8-002-46	-	-	L-002-46-W	-
874	28V, 7W	7-008-74	8-008-74	-	-	-	-




BULB	TYPE	PACK 1	PACK 10	LED			
				PACK 2 - BLUE	PACK 2 - RED	PACK 2 - WHITE	PACK 2 - YELLOW
382	12V, 21W	7-003-82	8-003-82	L-003-82-B	L-003-82-R	L-003-82-W	L-003-82-Y
241	24V, 21W	7-002-41	8-002-41	-	-	L-002-41-W	L-002-41-Y
345	28V, 26W	7-003-45	8-003-45	-	-	-	-


BA15D BULBS




BULB	TYPE	PACK 1	PACK 10
346	24V, 21W	7-003-46	8-003-46



BULB	TYPE	PACK 1	PACK 10
150	24V, 5W	7-001-50	8-001-50




BULB	TYPE	PACK 1	PACK 10
209	12V, 5W	7-002-09	8-002-09




BULB	TYPE	PACK 1	PACK 10
875	28V, 7W	7-008-75	8-008-75

BAZ15D BULBS



BULB	TYPE	PACK 1	PACK 10	LED
				PACK 2 - WHITE
566	12V, 21/4W	7-005-66	8-005-66	L-005-66-W
566A	24V, 21/4W	7-005-66A	8-005-66A	-

BA9S BULBS




BULB	TYPE	PACK 1	PACK 10	LED			
				PACK 2 - BLUE	PACK 2 - RED	PACK 2 - WHITE	PACK 2 - YELLOW
233	12V, 4W	7-002-33	8-002-33	L-002-33-B	L-002-33-R	L-002-33-W	L-002-33-Y
288	12V, 2W	7-002-88	8-002-88	-	-	-	-
249	24V, 4W	7-002-49	8-002-49	L-002-49-B	-	L-002-49-W	-
289	24V, 2W	7-002-89	8-002-89	-	-	-	-


BULB	LED CANBUS PERFECT - PACK 2
233	L-0C2-33-W

LIGHTING BULBS & BULB HOLDERS BULBS


BAX9S & BAY9S OSP BULBS



BULB	TYPE	PACK 1	PACK 10
433D	12V, 21W	7-004-33D	8-004-33D




BULB	TYPE	PACK 1	PACK 10
433E	24V, 21W	7-004-33E	8-004-33E




BULB	TYPE	PACK 1	PACK 10	LED CANBUS PERFECT - PACK 2
433C	12V, 6W	7-004-33C	8-004-33C	L-0C4-33CW

BAY15D BULBS




BULB	TYPE	PACK 1	PACK 10	LED	
				PACK 2 - WHITE	PACK 2 - YELLOW
334	24V, 21/5W	7-003-34	8-003-34	L-003-34-W	L-003-34-Y




BULB	TYPE	PACK 1	PACK 10	LED	
				PACK 2 - RED	PACK 2 - WHITE
380	12V, 21/5W	7-003-80	8-003-80	L-003-80-R	L-003-80-W

BAU15S AMBER BULBS



- Amber bulb


BULB	TYPE	PACK 1	PACK 10
581	12V, 21W	7-005-81	8-005-81



BULB	TYPE	PACK 1	PACK 10
581A	24V, 21W	7-005-81A	8-005-81A


BULB	LED - YELLOW PACK 2
581	L-005-81-Y

BAW15S RED BULBS



- Red bulb

BULB	TYPE	PACK 1	PACK 10
584	12V, 21W	7-005-84	8-005-84




BULB	TYPE	PACK 1	PACK 10
567	12V, 21/5W	7-005-67	8-005-67

LIGHTING BULBS & BULB HOLDERS BULBS

BULBS


LED BULBS ARE NOT ROAD LEGAL

FESTOON BULBS



- 11 x 30mm


BULB	TYPE	LED		
		PACK 2 - BLUE	PACK 2 - RED	PACK 2 - WHITE
269	12V	L-002-69-B	L-002-69-R	L-002-69-W



- 11 x 38mm


BULB	TYPE	PACK 1	PACK 10	LED			
				PACK 2 - BLUE	PACK 2 - RED	PACK 2 - WHITE	PACK 2 - YELLOW
239	12V, 5W	7-002-39	8-002-39	L-002-39-B	L-002-39-R	L-002-39-W	L-002-39-Y
242	24V, 5W	7-002-42	8-002-42	L-002-42-B	L-002-42-R	L-002-42-W	-

BULB	LED CANBUS PERFECT - PACK 2
239	L-0C2-39-W



- 11 x 43mm


BULB	TYPE	PACK 1	PACK 10
265	12V, 10W	7-002-65	8-002-65
274	24V, 10W	7-002-74	8-002-74



- 15 x 43mm


BULB	DESCRIPTION	PACK 1	PACK 10
276	24V, 15W	7-002-76	8-002-76

G4 CAPSULE HALOGEN BULBS




BULB	TYPE	PACK 1	PACK 10
		PART NO.	PART NO.
434	12V, 10W	7-004-34	8-004-34
434F	24V, 10W	7-004-34F	8-004-34F

G4 SMD LED BULBS




BULB	TYPE	LED
		PACK 1 - WHITE
G41	12V	L-00G-41-W

B8.5D TACHO BULBS



- Plastic PCB mounting

BULB	TYPE	LED	
		PACK 2 - BLUE	PACK 2 - WHITE
286T	12V, 1.2W	L-002-86-TB	L-002-86-TW




BULB	TYPE	LED
		PACK 2 - YELLOW
508T	24V, 1.2W	L-005-08-TY


LIGHTING BULBS & BULB HOLDERS BULBS

W2.1 X 9.5D BULBS

• 10mm



BULB	TYPE	PACK 1	PACK 10	LED			
				PACK 2 - BLUE	PACK 2 - RED	PACK 2 - WHITE	PACK 2 - YELLOW
501	12V, 5W	7-005-01	8-005-01	L-005-01-B	L-005-01-R	L-005-01-W	L-005-01-Y
501A	12V, 5W, Amber	7-005-01A	8-005-01A	-	-	-	-
504	12V, 3W	7-005-04	8-005-04	-	-	-	-
505	24V, 3W	7-005-05	8-005-05	-	-	-	-
507	24V, 5W	7-005-07	8-005-07	L-005-07-B	L-005-07-R	L-005-07-W	L-005-07-Y




• 35mm

BULB	TYPE	PACK 1	PACK 10
921B	12V, 16W	7-009-21B	8-009-21B


BULB	LED CANBUS PERFECT - PACK 2
501	L-0C5-01-W

W2 X 4.6D MINI CAPLESS

• Suitable for modular switches on pages 102



BULB	TYPE	PACK 5	LED		
			PACK 2 - BLUE	PACK 2 - RED	PACK 2 - WHITE
286	12V, 1.2W	7-002-86	L-002-86-B	L-002-86-R	L-002-86-W




• Suitable for modular switches on pages 102

BULB	TYPE	PACK 5	LED	
			PACK 2 - RED	PACK 2 - WHITE
508	24V, 1.2W	7-005-08	L-005-08-R	L-005-08-W

W3 X 16Q MINI CAPLESS


• 20mm



BULB	TYPE	PACK 1	PACK 10	LED
				PACK 2 - WHITE
380W	12V, 21/5W	7-003-80W	8-003-80W	L-003-80-WW

W3 X 16D MINI CAPLESS

• 20mm




BULB	TYPE	PACK 1	PACK 10	LED
				PACK 2 - WHITE
382W	12V, 21W, Clear	7-003-82W	8-003-82W	L-003-82-WW
382WA	12V, 21W, Amber	7-003-82WA	8-003-82WA	-

LIGHTING BULBS & BULB HOLDERS BULBS

BULBS


LED BULBS ARE NOT ROAD LEGAL

H1 BULBS




BULB	TYPE	PACK 1	PACK 10	LED	
				PACK 1 - BLUE	PACK 1 - WHITE
448	12V, 55W	7-004-48	8-004-48	L-004-48-B	L-004-48-W
466	24V, 70W	7-004-66	8-004-66	-	-

HB3 RT/ANG BULBS




BULB	TYPE	PACK 1	PACK 10	LED
				PACK 1 - WHITE
9005	12V, 60W	7-090-05	8-090-05	L-090-05-W

H3 HALOGEN BULBS




BULB	TYPE	PACK 1	PACK 10
453	12V, 55W UV Halogen	7-004-53	8-004-53
460	24V, 70W Halogen	7-004-60	8-004-60

H4 P43T BULBS




BULB	TYPE	PACK 1	PACK 10	LED	
				PACK 1 - BLUE	PACK 1 - WHITE
472	12V, 60/55W UV	7-004-72	8-004-72	L-004-72-B	L-004-72-W
475	24V, 75/70W	7-004-75	8-004-75	-	-

H11 PGJ19-2 BULBS



BULB	TYPE	PACK 1	PACK 10	LED	
				PACK 1 - BLUE	PACK 1 - WHITE
H11	12V, 55W	7-00H-11	8-00H-11	L-00H-11-B	L-00H-11-W
H11A	24V, 70W	7-00H-11A	8-00H-11A	-	-


HB4 RT/ANG BULBS



BULB	TYPE	PACK 1	PACK 10	LED
				PACK 1 - WHITE
9006	12V, 51W	7-090-06	8-090-06	L-090-06-W


LIGHTING BULBS & BULB HOLDERS BULBS

PGJ13 HALOGEN CLEAR BULBS




BULB	TYPE	PACK 1	PACK 10
896	12V, 37.5W	7-008-96	8-008-96

H7 PX26D UV BULBS



BULB	TYPE	XENON		LED
		PACK 1	PACK 10	PACK 1 - WHITE
499	12V, 55W	7-004-99	8-004-99	L-004-99-W

H7 XENON




BULB	TYPE	PACK 1	PACK 10
499A	24V, 70W	7-004-99A	8-004-99A

H10 PY20D LED BULB




BULB	TYPE	LED
		PACK 1 - WHITE
H10	12V	L-00H-10-W

H9 PGJ19-5 LED BULB



BULB	TYPE	LED
		PACK 1 - WHITE
H9	12V	L-00H-09-W

H8 PGJ-19-1 LED BULB



BULB	TYPE	LED
		PACK 1 - WHITE
H8	12V	L-00H-08-W

LIGHTING BULBS & BULB HOLDERS BULB HOLDERS

BULB HOLDERS

T10 WEDGE SINGLE BULB HOLDER



- Twist fit
- Plastic with 100mm lead

PART NO.	DESCRIPTION	QTY
0-705-11	T10 wedge bulb holder	1

T10 WEDGE SINGLE BULB HOLDER



- 100mm lead
- Push fit 12.5mm hole

PART NO.	DESCRIPTION	QTY
0-705-12	T10 wedge bulb holder	1

BA9S BULB HOLDER



- Metal
- 130mm flying lead

PART NO.	DESCRIPTION	QTY
0-705-01	BA9s bulb holder	1

BA15S BULB HOLDER



- Metal
- 130mm flying lead

PART NO.	DESCRIPTION	QTY
0-705-02	BA15s bulb holder	1

BAY15D BULB HOLDER



- Metal
- 130mm flying leads

PART NO.	DESCRIPTION	QTY
0-705-03	BAY15d bulb holder	1

SBC BATTEN LAMP HOLDER



- 3-hole fixing
- Spring loaded contacts

PART NO.	DESCRIPTION	QTY
0-705-00	SBC batten lamp holder	1

H1 BULB HOLDER

- Ceramic
- 100mm lead



PART NO.	DESCRIPTION	QTY
0-705-21	H1 bulb holder	1

H4 BULB HOLDER

- Ceramic
- 100mm leads



PART NO.	DESCRIPTION	QTY
0-705-22	H4 bulb holder	1

H4 BULB HOLDERS

- Plastic
- Complete with terminals



PART NO.	DESCRIPTION	QTY
0-539-51	H4 bulb holder	5
5-539-51	Single unit	1

H7 BULB HOLDER

- Ceramic
- 100mm leads



PART NO.	DESCRIPTION	QTY
0-705-23	H7 bulb holder	1

H8 BULB HOLDER

- Ceramic
- 100mm leads



PART NO.	DESCRIPTION	QTY
0-705-24	H8 bulb holder	1

H10 AND HB3 BULB HOLDER

- Ceramic
- 100mm leads



PART NO.	DESCRIPTION	QTY
0-705-25	H10/HB3 bulb holder	1

HB4 BULB HOLDER


- Ceramic
- 100mm leads

PART NO.	DESCRIPTION	QTY
0-705-26	HB4 bulb holder	1



03

SWITCHES & INDICATORS



BATTERY ISOLATORS	102
IGNITION SWITCHES	106
DASHBOARD SWITCHES	108
TOGGLE SWITCHES	115
ROTARY SWITCHES	120
PUSH BUTTON SWITCHES	121
PUSH/PULL SWITCHES	122
DOOR & FOOT SWITCHES	123
PUSH BUTTON CONTROLS	124

**EXTENSIVE RANGE
COVERING OVER
90% OF VEHICLE
APPLICATIONS.**

EXTERNAL SWITCHES

BATTERY ISOLATORS

SINGLE POLE

250A REMOVABLE HANDLE



- Rated 250A at 24V and 2150A for 5 seconds
- M10 Terminals
- Requires 24mm hole
- Splash proof to IP54



PART NO.	DESCRIPTION	QTY
0-605-52	Battery isolator	1

250A FIXED HANDLE



- Fixed handle
- Rated 250A at 24V and 2500A for 5 seconds
- M10 studs and requires 30.5mm hole
- Replaces Ford / Iveco 4822229




PART NO.	DESCRIPTION	QTY
0-605-60	Battery isolator	1

250A REMOVABLE KEY



- Battery isolator with removable key in the 'On' and 'Off' positions.
- Rated 250A at 24V and 2500A for 5 seconds
 - M10 studs and requires 30.5mm hole



PART NO.	DESCRIPTION	QTY
0-605-65	Battery isolator	1
0-605-64	Replacement key	1

250A REMOVABLE KEY



- Removable key, splash proof cover, IP65
- Rated 250A at 24V and 2500A for 5 seconds
- M10 studs and requires 24mm hole
- 8mm lock hole



PART NO.	DESCRIPTION	QTY
0-605-50	Battery isolator	1
0-605-55	Replacement key	1

250A REMOVABLE KEY



- Battery isolator with removable key in the 'Off' position.
- Rated 250A at 24V and 2500A for 5 seconds
 - M10 studs, requires 30mm hole
 - Supplied with 2 keys



PART NO.	DESCRIPTION	QTY
0-605-61	Battery isolator	1
0-605-19	Blank/uncut key	1

250A FIXED 'T' KEY



- Rated 250A at 24V and 2150A for 5 seconds
- M10 terminals
- Requires 30.5mm hole
- Waterproof to IP67




PART NO.	DESCRIPTION	QTY
0-605-62	Battery isolator	1

150A BATTERY SWITCH WITH REMOVABLE KEY



- Single throw on/off isolator with removable handle
- 24VDC max
- 150A continuous
- 1000A max for 5 seconds
- M10 terminals
- Protected to IP65




PART NO.	DESCRIPTION	QTY
0-605-05	Battery isolator	1
0-605-96	Replacement key	1

100A REMOVABLE KEY



- Battery isolator with removable key in the 'On' or 'Off' positions.
- Rated 100A at 24V, 500A for 5 seconds
 - M10 studs and 22.5mm hole
 - Supplied with 2 keys



PART NO.	DESCRIPTION	QTY
0-605-20	Battery isolator	1
0-605-19	Blank/uncut key	1

100A REMOVABLE KEY



- Rated 100A at 24V and 500A for 5 seconds
- M8 studs and requires 24mm hole
- Splash proof cover




PART NO.	DESCRIPTION	QTY
0-605-00	Battery isolator	1
0-605-99	Replacement key	1

SWITCHES & INDICATORS EXTERNAL SWITCHES BATTERY ISOLATORS

100A REMOVABLE KEY

Battery isolator with removable key and splash proof cover.

- With independent ignition switching and controlled earth leakage through a resistor to avoid damage through load dumping
- Rated 100A at 24V and 500A for 5 seconds
- M10 studs



PART NO.	DESCRIPTION	QTY
0-605-90	Battery isolator	1

PART NO.	DESCRIPTION	QTY
0-605-98	Replacement key	1

100A KNOB

- Rated 100A at 24V and 500A for 5 seconds
- M10 studs, requires 19.5mm hole and two 4mm fixing holes
- Replaces SSB103



PART NO.	DESCRIPTION	QTY
0-605-02	Battery isolator	1

100A KNOB

- Rated 100A at 24V and 500A for 5 seconds
- M10 studs and requires 19.5mm hole
- Replaces SSB106



PART NO.	DESCRIPTION	QTY
0-605-01	Battery isolator	1

75A REMOVABLE KEY

Battery isolator with removable key in the 'Off' position.

- Rated 75A at 24V, 200A for 5 seconds
- M10 studs and requires 22.5mm hole
- Supplied with 2 keys



PART NO.	DESCRIPTION	QTY
0-605-21	Battery isolator	1
0-605-19	Blank/uncut key	1

DOUBLE POLE

250A REMOVABLE KEY

Battery isolator, double pole with removable key and splash proof cover.

- Rated 250A at 24V and 2500A for 5 seconds
- Connects or disconnects both poles simultaneously
- Requires 24mm hole, M10 studs
- Housing protected to IP66




PART NO.	DESCRIPTION	QTY
0-605-51	Battery isolator	1
0-605-55	Replacement key	1

125A FIXED HANDLE

Double pole battery isolator with fixed handle.

- Rated at 125A continuous 500A for 15 seconds
- 3/8" - 24 studs and requires 18.6mm hole




PART NO.	DESCRIPTION	QTY
0-605-22	Battery isolator	1

20A METAL KEY



On/off, double pole switch with metal key.

- 6.3mm blade terminals
- 12mm panel hole
- Rated 20A at 12V




PART NO.	DESCRIPTION	QTY
0-495-60	Battery isolator	1
0-495-99	Replacement key	1

SWITCHES & INDICATORS EXTERNAL SWITCHES BATTERY ISOLATORS

500A BATTERY DISCONNECT SWITCH


Double pole battery disconnect switch with fixed lockable handle.

- Rated at 500A continuous 2250A for 30 seconds
- IP69K (front) and IP67 (rear)
- Studs M12 x 25mm and requires 80mm hole




PART NO.	DESCRIPTION	QTY
0-605-80	Battery isolator	1

CHANGE-OVER
250A FIXED HANDLE


Battery change-over switch with fixed handle.

- 2 position on/on for switching from one battery to another
- Rated 250A at 24V and 2500A for 5 seconds
- Studs M10 x 2, M12 x 1 and requires 26.5mm hole




PART NO.	DESCRIPTION	QTY
0-605-70	Fixed handle	1

MARINE
250A FIXED HANDLE


Marine double pole battery isolator with fixed handle.

- Rated 250A at 24V and 2500A for 5 seconds
- Connects or disconnects both poles simultaneously
- M10 studs



PART NO.	DESCRIPTION	QTY
0-605-26	Fixed handle	1

300A REMOVABLE KNOB


Marine battery isolator with removable control knob (off position).

- Rated at 300A continuous (1hr) at 48VDC and 1000A for 5 seconds
- M10 studs
- L 69 x W 77 x H 69mm
- CE approved



PART NO.	DESCRIPTION	QTY
0-605-11	Removable knob	1
0-605-94	Replacement knob	1

550A FIXED KNOB


Marine battery isolator with fixed control knob with padlock hole.

- Rated at 550A continuous (1hr) and 2500A for 5 seconds, max 48VDC
- M12 studs
- L 102 x W 90 x H 102mm
- CE approved



PART NO.	DESCRIPTION	QTY
0-605-12	Fixed knob	1

75A REMOVABLE KEY


Marine battery isolator with removable key and splash proof cover.

- Rated 75A at 24V, 200A for 5 seconds
- M10 studs and requires 22.5mm hole




PART NO.	DESCRIPTION	QTY
0-605-13	Battery isolator	1
0-605-97	Replacement key	1

310A KNOB


Marine battery isolator and change over switch with solid copper contacts.

- Rated 310A continuous and 500A for 5 seconds, max 36VDC
- Selects between batteries one, two, both or off
- M10 studs
- L 160 x W 72 x H 160mm



PART NO.	DESCRIPTION	QTY
0-605-10	Knob	1

SWITCHES & INDICATORS EXTERNAL SWITCHES BATTERY ISOLATORS

300A REMOVABLE KNOB

Marine battery isolator with removable control knob (in 1 or 2 position).

- Rated at 300A continuous (1hr) at 48VDC and 1000A for 5 seconds
- Selects between batteries one, two, both or off
- M10 studs
- L 69 x W 77 x H 69mm
- CE approved

TERMS	0	1	1+2	2
A-1		■		
A-1-2			■	
A-2				■

PART NO.	DESCRIPTION	QTY
0-605-09	Removable knob	1



EMERGENCY ISOLATORS

130A, 48V

Emergency push button battery isolator.

- Turn button 45° to switch on, push to disconnect
- Rated 130A at 48V and 500A for 10 seconds
- M8 studs and requires 41mm hole
- Protected to IP66



PART NO.	DESCRIPTION	QTY
0-605-40	130A	1

TERMS	0	1
A-B		■

250A, 24V

Emergency push button battery isolator.

- Turn button 180° to switch on, push to disconnect
- Rated 250A at 24V and 2500A for 5 seconds
- M10 studs and requires 66mm hole



PART NO.	DESCRIPTION	QTY
0-605-45	250A	1

TERMS	0	1
A-B		■

15A, 12V

Marine emergency cut-off switch with lanyard, cut-out can also be operated with lanyard clip in place by pressing knob, suitable for coil or magneto ignition.

- 6.3mm blade terminals
- 16mm panel hole
- Rated at 15A at 12V

TERMS	Clip on	Knob press (clip on)	Clip off
C-C		■	
M-M	■		

PART NO.	DESCRIPTION	QTY
0-605-41	15A	1



REMOTE BATTERY SWITCHES

300A, 12V

Battery isolator, 12V, single pole electrically remotely switched.

- Bosch 'U' type fixing bracket
- Rated at 300A continuous, 600A for 20 seconds and 2400A for 1 seconds
- M10 and M5 studs

PART NO.	DESCRIPTION	QTY
0-605-33	300A	1



TERMS	0	1
30-30a		■

300A, 24V

Battery isolator, 24V, single pole, with auxiliary circuit electrically remotely switched.

- Bosch 'U' type fixing bracket
- Rated at 300A continuous, 600A for 20 seconds and 2400A for 1 seconds
- M10 and M5 studs

PART NO.	DESCRIPTION	QTY
0-605-43	300A	1



TERMS	0	1
30-30a		■
Aux	■	

250A, ISOLATED RETURN

Battery isolator, double pole, electrically remotely switched.

- Isolated return
- Rated 250A at 24V and 2500A for 5 seconds
- Terminal sizes M10 and M5
- Protected to IP65
- CE approved
- Resists pressure water jets

PART NO.	DESCRIPTION	QTY
0-605-44	24V	1



TERMS	0	1
30-30a		■
31-31a		■

SWITCHES & INDICATORS EXTERNAL SWITCHES IGNITION SWITCHES

AIR SWITCHES

72.5 PSI



- 72.5psi / 5.0bar
- M12 x 1.5
- Replaces Wabco 441 014 015 0

PART NO.	DESCRIPTION	QTY
0-577-20	72.5 PSI	1

2.2 PSI




- 2.2psi / 0.15bar
- M12 x 1.5
- Rated 5A at 24V
- Replaces Wabco 441 014 019 0

PART NO.	DESCRIPTION	QTY
0-579-60	2.2 PSI	1

IGNITION SWITCHES

METAL IGNITION SWITCHES


OFF/IGNITION/PRE-HEAT/
HEAT START

4 position switch, off/ignition/pre-heat/heat start.

- Ø 16mm panel hole
- Supplied with two keys
- Replaces Lucas 34228, 35670

PART NO.	DESCRIPTION	QTY
0-351-06	4 position switch	1
0-351-10	Replacement key	1

OFF/ACCESSORY/IGNITION/START




4 position switch, off/accessory/ignition/start.

- Ø 22mm panel hole
- Supplied with two universal keys

PART NO.	DESCRIPTION	QTY
0-351-05	4 position switch	1
0-351-09	Spare universal key	1
0-351-90	Splash-proof key slot cover	1

OFF/ON



2 position switch, off/on.

- Ø 22mm panel hole
- Supplied with two universal keys

PART NO.	DESCRIPTION	QTY
0-351-01	2 position switch	1
0-351-09	Spare universal key	1
0-351-90	Splash-proof key slot cover	1

OFF/IGNITION/PRE-HEAT/
HEAT START

4 position switch, off/ignition/pre-heat/heat start.

- Ø 16mm panel hole
- Supplied with two keys
- Replaces Lucas 35327

PART NO.	DESCRIPTION	QTY
0-351-04	4 position switch	1
0-351-10	Replacement key	1


OFF/ACCESSORY/IGNITION/
PRE-HEAT/HEAT START

5 position switch, off/accessory/ignition/pre-heat/heat start.

- Ø 19mm panel hole
- Supplied with two keys
- Replaces Lucas 36614

PART NO.	DESCRIPTION	QTY
0-351-08	5 position switch	1
0-351-10	Replacement key	1

START/OFF/PRE-HEAT/HEAT START



4 position switch, start/off/pre-heat/heat start.

- Ø 16mm panel hole
- Supplied with two keys
- Replaces Lucas 35630

PART NO.	DESCRIPTION	QTY
0-351-07	4 position switch	1
0-351-10	Replacement key	1

SWITCHES & INDICATORS EXTERNAL SWITCHES IGNITION SWITCHES

PLASTIC IGNITION SWITCHES

ACCESSORY/OFF/ACCESSORY AND IGNITION/ PRE-HEAT/START

TERMS	P	0	1	2	3
30-58	■				
30-1554			■	■	■
30-19		←	■		
30-17		←	■		
30-50a		←	■		

5 position switch, accessory/off/accessory and ignition/pre-heat/start.

- Ø 26mm panel hole
- Protected to DIN400050, IP64
- Supplied with two shrouded keys
- 100 key type

PART NO.	DESCRIPTION	QTY
0-351-55	5 position switch	1
0-351-11	Spare blank/uncut key	1
0-351-56	Switch as above but with single common 14607 keys	1
0-351-59	Spare 14607 key	1



ACCESSORY/OFF/ACCESSORY AND IGNITION/ START

TERMS	P	0	1	2
30-58	■			
30-1554			■	■
30-50a		←	■	

4 position switch, accessory/off/accessory and ignition/start.

- Ø 26mm panel hole
- Protected to DIN40050 IP64
- Supplied with two shrouded keys
- 100 key type

PART NO.	DESCRIPTION	QTY
0-351-51	4 position switch	1
0-351-11	Spare blank/uncut key	1



OFF/IGNITION/PRE-HEAT/START

TERMS	0	1	2	3
30-15/54		■	■	■
30-19		←	■	
30-17		←	■	
30-50a		←	■	

4 position switch off/ignition/pre-heat/start.

- Ø 26mm panel hole
- Supplied with two keys (No.14603)

PART NO.	DESCRIPTION	QTY
0-351-20	4 position switch	1
0-351-29	Spare 14603 key	1



PARK/OFF/IGNITION/START

TERMS	P	0	1	2
30-P	■			
30-15			■	■
30-15a			■	
30-50		←	■	

4 position switch, park/off/ignition/start.

- Ø 19mm panel hole
- Supplied with two keys
- 200 key types

PART NO.	DESCRIPTION	QTY
0-351-03	4 position switch	1
0-351-14	Spare blank/uncut key	1



DASHBOARD SWITCHES

ROCKER SWITCHES & WARNING LIGHTS

LED MODULAR ROCKER SWITCHES




LED Rocker switches offering a range of functions. The complete product can be accommodated in an industry standard panel cut out or gang mounted on a choice of frames.

- 1 or 2 LED illuminations
- 12/24V
- Protected to IP66 (front)
- Choice of lens legends and colours
- 20A at 12VDC and 10A at 24VDC

STEP1 | SELECT YOUR PANEL

- 1 SWITCH ONLY - no ganging frame needed, go to step 2
- 2+ SWITCHES - build your panel using our ganging frames

DESCRIPTION	PART NO.
GANG MOUNTING FRAMES	
End Frame	0-798-10
Middle Frame	0-798-11
Blank Plate	0-798-98
TERMINAL CONNECTOR BLOCK (optional)	
Connector block	0-798-99
TOOLS	
Rocker switch removal tool	0-798-95

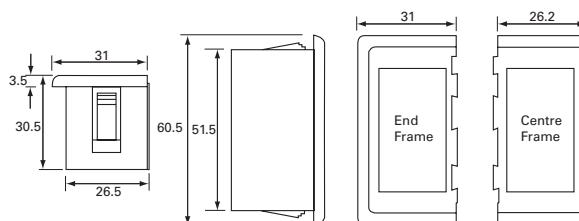


Panel cut-out for single switch:
W 21.2 x H 37.5mm.

Panel cut-out for 2 end frames:
W 53 x H 51.5mm, add W 26.2mm for each centre frame.

STEP2 | SELECT YOUR BODY

FUNCTIONS / ILLUMINATION

FUNCTION	SINGLE POLE	DOUBLE POLE	1 ILLUMINATION	2 ILLUMINATIONS	PART NO.
2-POSITION SWITCH					
Off/On	x		x		0-780-51
		x	x		0-780-61
Off/Momentary On	x		x		0-781-51
		x	x		0-781-61
Change-Over	x			x	0-782-52
		x		x	0-782-62
3-POSITION SWITCH					
On/Off/On	x			x	0-784-52
		x		x	0-784-62
On/Off/Momentary On	x			x	0-785-52
		x		x	0-785-62
Momentary On/Off/Momentary On	x			x	0-786-52
		x		x	0-786-62
On/On/On		x	x		0-789-62

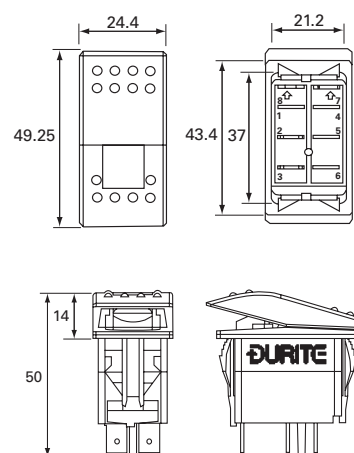

SWITCHES & INDICATORS DASHBOARD SWITCHES ROCKER SWITCHES & WARNING LIGHTS

STEP3 | SELECT YOUR ROCKER

ONE OR TWO LENSES

DESCRIPTION	PART NO.
One lens rocker	0-795-XX
Two-lens rocker	0-796-XX

✂ XX - Select a lens colour (blank) or white lens with logo and add extension to part number.



✂ One lens rocker. ✂ Two-lens rocker.

LENS COLOUR

	amber	0-79X-90
	red	0-79X-95

	blue	0-79X-92
	white	0-79X-97

	green	0-79X-94
---	-------	----------

✂ These are blank lenses.

WHITE LENS WITH LOGO

✂ The legends are printed on the white lenses, these can be printed on other coloured lenses to order subject to minimum quantity.

	windscreen wiper	0-79X-01
	windscreen washer	0-79X-02
	rear screen wiper	0-79X-03
	headlamp wiper/washer	0-79X-04
	headlamp washer	0-79X-05
	side lights	0-79X-06
	front fog lamps	0-79X-08
	rear fog lamps	0-79X-09
	front/rear work lamps	0-79X-10
	front work lamp	0-79X-11
	rear work lamp	0-79X-12
	5th wheel work lamp	0-79X-13
	lights	0-79X-14
	interior lamps	0-79X-15

	hazard beacon	0-79X-18
	diesel pre-heat	0-79X-20
	fan	0-79X-21
	air conditioning	0-79X-22
	heated seat	0-79X-23
	windscreen demist	0-79X-24
	rear window demist	0-79X-25
	wing mirror demist	0-79X-26
	horn	0-79X-34
	down	0-79X-37
	up	0-79X-38
	up down	0-79X-39
	fuel tank change over	0-79X-41
	fuel tank two	0-79X-43

	winch	0-79X-47
	slow	0-79X-48
	fast	0-79X-49
	left	0-79X-50
	right	0-79X-51
	on/one	0-79X-52
	rear window wiper/washer	0-79X-53
	rear window washer	0-79X-54
	lock	0-79X-55
	unlock	0-79X-56
	window lift	0-79X-44
	power	0-79X-45
	instrument lamps	0-79X-16
	reading lamp	0-79X-17

EXAMPLE

If you want to order a two-lens rocker with horn logo, you will need to order
 - a body 2-position, On/Off single pole switch 0-780-51 (STEP2) and
 - a two-lens rocker 0-796-xx with a white lens with horn logo 0-79x-34, so 0-796-34 (STEP3)

MODULAR ROCKER SWITCHES & WARNING LIGHTS



A range of switches and complimentary warning lights offering a full range of functions within a contemporary ergonomic design.

The complete product can be accommodated in an industry standard panel cut out or gang mounted on a choice of frames.




- 1 or 2 bulb illuminations
- 12V or 24V applications
- Waterproof version available (protected to IP67)
- Choice of lens legends and colours
- 20A at 12VDC and 10A at 24VDC

STEP1 | SELECT YOUR PANEL

- 1 SWITCH OR WARNING LIGHT ONLY - no ganging frame needed, go to step 2
- 2+ SWITCHES - build your panel using our ganging frames

DESCRIPTION	PART NO.
GANG MOUNTING FRAMES	
End Frame	0-793-00
Middle Frame	0-793-01
Blank Plate	0-793-99
TERMINAL CONNECTOR BLOCK (optional)	
Connector block, 12 terminals	0-793-50

end frame

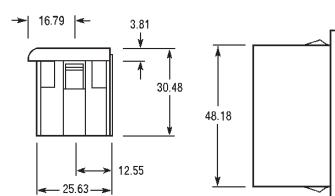pair of end frames
panel cut-out 51.5 x 48.3mmpair of end frames and a centre frame
panel cut-out 77.8 x 48.3mm

STEP2 | ROCKER WARNING OR SWITCH LIGHT

Do you want a warning light or rocker switch?

WARNING
LIGHTROCKER
SWITCH

STEP3 | SELECT YOUR BODY


WARNING LIGHT ONLY

First, select your warning light body:


BODY	1 ILLUMINATION	2 ILLUMINATIONS	SEALED IP67	PART NO.
One hole	x			0-794-01
Two holes		x		0-794-02
		x	x	0-794-03

Then, select your warning light facia:

FACIA	PART NO.
One window	0-779-51
Two windows	0-779-52

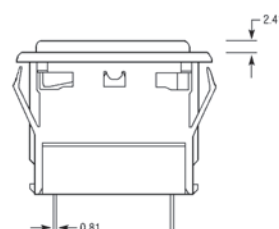

warning light



Finally, add your bulb(s):

BULB	PART NO.	QTY
12V	7-002-86	5
24V	7-005-08	5

SWITCHES & INDICATORS DASHBOARD SWITCHES ROCKER SWITCHES & WARNING LIGHTS

🔧 First, select your rocker switch body:

ROCKER SWITCH ONLY


FUNCTION	SINGLE POLE	DOUBLE POLE	NO ILLUMINATION	1 ILLUMINATION	2 ILLUMINATIONS	SEALED IP67	PART NO.
2-POSITION SWITCH							
Off/On	x		x				0-780-10
	x			x			0-780-11
		x	x				0-780-20
		x		x			0-780-21
		x		x		x	0-780-23
Off/Momentary On	x		x				0-781-10
	x			x			0-781-11
		x	x				0-781-20
		x		x			0-781-21
		x		x		x	0-781-23
Change-Over	x		x				0-782-10
	x				x		0-782-12
		x	x				0-782-20
		x			x		0-782-22
		x			x	x	0-782-23
Hazard	x				x		0-783-12
3-POSITION SWITCH							
On/Off/On	x		x				0-784-10
	x				x		0-784-12
		x	x				0-784-20
		x			x		0-784-22
		x			x	x	0-784-23
On/Off/Momentary On	x		x				0-785-10
	x				x		0-785-12
		x	x				0-785-20
		x			x	x	0-785-23
Momentary On/Off/ Momentary On	x		x				0-786-10
	x				x		0-786-12
		x	x				0-786-20
		x			x		0-786-22
		x			x	x	0-786-23
Off/A/A+B	x		x				0-787-10
	x				x		0-787-12
	x				x	x	0-787-13
On/On/On	x		x				0-789-10
	x				x		0-789-12
	x				x	x	0-789-13
Wiper	x			x			0-788-10

🔧 Then, select your switch rocker:

FACIA	PART NO.
No window	0-779-00
Bottom window	0-779-01
Two windows (Top & Bottom)	0-779-02

🔧 Finally, add your bulb(s):

BULB	PART NO.	QTY
12V	7-002-86	5
24V	7-005-08	5

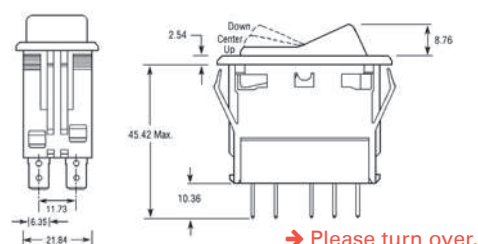

STEP4 | SELECT YOUR LENSES

DESCRIPTION	PART NO.	QTY
Top lens	0-791-XX	5
	5-791-XX	1
Bottom lens	0-792-XX	5
	5-792-XX	1

Our rocker switches and warning lights are handed. Select Top or Bottom lenses.

XX - Select a blank coloured lens or coloured lens with logo and add extension to part number.


	windscreen wiper	0-79X-01		fan	0-79X-21		fuel tank change over	0-79X-41
	windscreen washer	0-79X-02		air conditioning	0-79X-22		liquid level warning	0-79X-42
	rear screen wiper	0-79X-03		heated seat	0-79X-23		fuel tank two	0-79X-43
	headlamp wiper/washer	0-79X-04		windscreen demist	0-79X-24		window lift	0-79X-44
	headlamp washer	0-79X-05		rear window demist	0-79X-25		power	0-79X-45
	side lights	0-79X-06		wing mirror demist	0-79X-26		ignition warning	0-79X-46
	headlamp main beam	0-79X-07		trailer warning	0-79X-27		winch	0-79X-47
	front fog lamps	0-79X-08		choke warning	0-79X-28		slow	0-79X-48
	rear fog lamps	0-79X-09		parking brake warning	0-79X-29		fast	0-79X-49
	front/rear work lamps	0-79X-10		ABS brake warning	0-79X-30		left	0-79X-50
	front work lamp	0-79X-11		trailer ABS warning	0-79X-31		right	0-79X-51
	rear work lamp	0-79X-12		brake warning	0-79X-32		on/one	0-79X-52
	5th wheel work lamp	0-79X-13		oil pressure warning	0-79X-33		rear window wiper/washer	0-79X-53
	lights	0-79X-14		horn	0-79X-34		rear window washer	0-79X-54
	interior lamps	0-79X-15		right/left	0-79X-35		lock	0-79X-55
	instrument lamps	0-79X-16		direction indicator	0-79X-36		unlock	0-79X-56
	reading lamp	0-79X-17		down/up	0-79X-37		amber	0-79X-90
	hazard beacon	0-79X-18		water temperature	0-79X-38		blue	0-79X-92
	hazard warning	0-79X-19		up down	0-79X-39		green	0-79X-94
	diesel pre-heat	0-79X-20		fuel warning	0-79X-40		red	0-79X-95

EXAMPLE If you want to order 1 x top lens air logo, you will need to order 5-791-22.

SWITCHES & INDICATORS DASHBOARD SWITCHES ROCKER SWITCHES & WARNING LIGHTS

OTHER ROCKER SWITCHES

POPULAR ON/OFF




On/off, single pole switch, plastic rocker.

- 12/24V LED indicator
- 4.8mm blade terminals
- Snap fits into Ø 20mm panel hole
- 10A at 12VDC rating

PART NO.	DESCRIPTION	QTY
0-531-01	Non-illuminated	1
0-531-02	Blue LED	1
0-531-04	Green LED	1
0-531-05	Red LED	1
0-531-10	Amber LED	1
3-531-05	Red LED	100

ON/OFF SWITCH WITH LOGO




Amber, on/off single pole switch, plastic rocker.

- 12/24V LED indicator
- 4.8mm blade terminals
- Snap fits into 20mm Ø panel hole
- 10A at 12V DC rating

	PACK 1	PACK 50
DESCRIPTION	PART NO.	PART NO.
Beacon symbol	0-531-18	4-531-18
Work lamp symbol	0-531-11	4-531-11
5th wheel symbol	0-531-13	4-531-13

WITH OR WITHOUT COVER




12V, On/off, single pole switch, plastic rocker and 4.8mm blade terminals.

- Snap fits into rectangular panel hole 19.5 x 13mm
- 10A at 12VDC rating

PART NO.	DESCRIPTION	QTY
0-530-01	Without cover	1
0-530-51	With flexible PVC cover	1

ILLUMINATED RED OR AMBER



On/off single pole illuminated round rocker switch.

- 4.8mm blade terminals
- Snap fits into Ø 20mm panel hole
- 20A at 12V rating

PART NO.	DESCRIPTION	QTY
0-531-25	Red LED 12V	1
0-531-30	Amber LED 12V	1

MINI ON/OFF




On/off, single pole switch, miniature plastic rocker and 4.8mm blade terminals.

- Snap fits into Ø 15mm panel hole
- 6A at 12VDC rating

PART NO.	DESCRIPTION	QTY
0-531-00	Mini on/off	1

ON/ON CHANGE-OVER



12/24V Change-over or on/off, single pole switch and plastic rocker.

- 4.8mm blade terminals
- 10A at 12V DC rating

PART NO.	DESCRIPTION	QTY
0-530-02	On/on change over	1



FOR MORE INFO, VISIT WWW.DURITE.CO.UK
OR CONTACT INFO@DURITE.CO.UK

OTHER WARNING LIGHTS

12V MINI CLASSIC



Warning light with 12V 2W BA7s bulb.

- Ø 13mm panel hole and 6.3mm blade terminals
- Re-lamped from rear of panel

LENS	PACK 1	PACK 100
	PART NO.	PART NO.
Blue	0-609-02	3-609-02
Green	0-609-04	3-609-04
Red	0-609-05	3-609-05
Amber	0-609-10	3-609-10

12/24V MICRO LED



Warning light, 12/24V LED, for push fit into 8.2mm panel hole.

- Supplied with 300mm leads
- Warning - observe polarity, red +ve, black -ve

LENS	12V	24V	QTY
Green	0-607-04	0-607-24	1
Red	0-607-05	0-607-25	1
Amber	0-607-10	0-607-30	1
Red - Flashing	0-607-55	0-607-75	1

LED WARNING



Warning light, 12/24V LED indicator.

- 4.8mm blade terminals
- Snap fits into Ø 20mm panel hole

LENS	PART NO.	QTY
Blue	0-607-32	1
Green	0-607-34	1
Red	0-607-35	1
Amber	0-607-40	1

BULB WARNING



Warning light, supplied without 9mm BA9s bulb.

- 17mm panel hole and 6.3mm terminals
- Re-lamped from front of panel
- 2W bulb max

LENS	PART NO.	QTY
Blue	0-609-62	1
Green	0-609-64	1
Red	0-609-65	1
Amber	0-609-70	1

WITH SYMBOLS



Warning light, supplied without 9mm BA9s bulb.

- 17mm panel hole and 6.3mm terminals
- Re-lamped from front of panel
- 2W bulb max

LENS	PART NO.	SYMBOLS	QTY
Red	0-609-51		1
Red	0-609-53		1
Red	4-609-54		1
Red	0-609-56		1
Green	0-609-57		1
Amber	0-609-59		1



TOGGLE SWITCHES

2 POSITIONS

SINGLE POLE, PLAIN ON/OFF

METAL TOGGLE



On/off, single pole switch, with nickel plated brass lever.

- 6.3mm blade terminals
- 13mm panel hole
- 10A at 28VDC rating

PART NO.	DESCRIPTION	QTY
0-603-00	10A	1

METAL, WITH RUBBER SEAL




On/off, single pole switch, with rubber sealing gaiter over nickel plated brass lever.

- 6.3mm terminals
- 13mm panel hole
- 10A at 28VDC rating

PART NO.	DESCRIPTION	QTY
0-603-50	10A	1

PLASTIC PADDLE




On/off, single pole switch, with plastic paddle style lever.

- 6.3mm blade terminals
- 14.5mm panel hole
- 5A at 12VDC rating
- Replaces SPB200

PART NO.	DESCRIPTION	QTY
0-364-11	5A	1

PVC SHROUDED PLASTIC TOGGLE




On/off, single pole switch, with PVC shroud over nylon toggle lever.

- 6.3mm blade terminals
- 13mm panel hole
- 10A at 12VDC rating

PART NO.	DESCRIPTION	QTY
0-364-50	10A	1

ILLUMINATED WITH 12/24V LED




On/off, single pole switch, nickel plated round metal lever with 12/24V LED indicator.

- 6.3mm blade terminals
- 13mm panel hole
- 10A at 28VDC rating

PART NO.	DESCRIPTION	QTY
0-603-02	Blue LED	1
0-603-04	Green LED	1
0-603-05	Red LED	1
0-603-10	Amber LED	1

PLASTIC PADDLE STYLE



On/off, single pole switch, with plastic paddle style lever.

- 6.3mm blade terminals
- 13mm panel hole
- 10A at 12VDC rating

PART NO.	DESCRIPTION	QTY
0-603-01	10A	1

PLASTIC TOGGLE STYLE

On/off, single pole switch, with plastic toggle style lever.

- 6.3mm blade terminals
- 13mm panel hole
- 10A at 12VDC rating



PART NO.	DESCRIPTION	QTY
0-364-00	10A	1

PLASTIC FLAT LEVER

On/off, single pole switch, with plastic flat lever style.

- 6.3mm blade terminals
- 13mm panel hole
- 10A at 12VDC rating



PART NO.	DESCRIPTION	QTY
0-364-01	10A	1

SINGLE POLE, OTHERS

METAL CHANGE-OVER OR ON/OFF



Change-over or on/off, two position, single pole switch.

- Nickel plated brass lever
- 6.3mm blade terminals
- 13mm panel hole
- 10A at 28VDC rating

PART NO.	DESCRIPTION	QTY
0-658-01	10A	1

MOMENTARY ON



Momentary on, single pole switch, with nickel plated brass lever and 6.3mm blade terminals.

- 13mm panel hole
- 10A at 28VDC rating

PART NO.	DESCRIPTION	QTY
0-687-01	10A	1

MOMENTARY ON



Momentary on, single pole switch, with plastic paddle style lever.

- 6.3mm blade terminals
- 14.5mm panel hole
- 5A at 12VDC rating
- Replaces SPB204

PART NO.	DESCRIPTION	QTY
0-687-11	5A	1

CHANGE-OVER OR ON/OFF



Change-over or on/off, two position, single pole switch.

- Rubber sealing gaiter over nickel plated brass lever
- 6.3mm blade terminals
- 13mm panel hole
- 10A at 28VDC rating

PART NO.	DESCRIPTION	QTY
0-658-51	10A	1

METAL, MOMENTARY ON




Momentary on, single pole switch, with rubber sealing gaiter over nickel plated brass lever.

- 6.3mm blade terminals
- 13mm panel hole
- 10A at 28VDC rating

PART NO.	DESCRIPTION	QTY
0-687-50	10A	1

CHANGE-OVER OR ON/OFF




Change-over or on/off, two position, single pole switch.

- Nylon paddle style lever
- 6.3mm blade terminals
- 13mm panel hole
- 10A at 12VDC rating

PART NO.	DESCRIPTION	QTY
0-658-00	10A	1

ON/ON OR CHANGE-OVER



On/on or change-over, single pole switch, with plastic paddle style lever.

- 6.3mm blade terminals
- 14.5mm panel hole
- 18A at 12VDC rating
- Replaces 34889

PART NO.	DESCRIPTION	QTY
0-658-11	18A	1

CHANGE-OVER OR ON/OFF




Change-over or on/off, two position, single pole miniature lever switch.

- Chrome plated brass lever and solder lug terminals
- 6.5mm panel hole
- 5A at 28VDC rating
- Protected to IP67

PART NO.	DESCRIPTION	QTY
0-603-60	5A	1

ILLUMINATED CHANGE-OVER OR ON/OFF



Illuminated change-over or on/off switch.

- LED changes from red to green
- Single pole single throw
- 6.3mm terminals
- Ø 11mm panel hole
- 30A at 12V rating

PART NO.	DESCRIPTION	QTY
0-658-03	12V	1

SWITCHES & INDICATORS DASHBOARD SWITCHES TOGGLE SWITCHES

DOUBLE POLE

HEAVY-DUTY, BRASS LEVER

On/off, double pole heavy-duty switch, with nickel plated brass lever and screw.

- 6.3mm blade terminals
- 13mm panel hole
- 20A at 12VDC rating



PART NO.	DESCRIPTION	QTY
0-495-00	20A	1

TERMS	0	1
A-B		
A-C		
C-D		

CHANGE-OVER OR ON/OFF

Change-over or on/off, two position, double pole switch.

- Nickel plated brass lever
- 6.3mm blade terminals
- 13mm panel hole
- 10A at 28VDC rating



PART NO.	DESCRIPTION	QTY
0-658-02	10A	1

TERMS	0	1
A-B		
A-C		
D-E		
D-F		

THREE POSITIONS
SINGLE POLE

MOMENTARY CHANGE-OVER OR MOMENTARY ON/OFF/MOMENTARY ON

Momentary on/off/momentary on or momentary change-over, single pole switch biased off.

- Nickel plated brass lever
- 6.3mm blade terminals
- 13mm panel hole
- 10A at 28VDC rating

TERMS	1	0	2
A-B			
A-C			



PART NO.	DESCRIPTION	QTY
0-496-00	10A	1

MOMENTARY CHANGE-OVER OR MOMENTARY ON/OFF/MOMENTARY ON

Momentary change-over or momentary on/off/momentary on, single pole switch, with rubber sealing gaiter over nickel plated brass lever.

- 6.3mm terminals
- 13mm panel hole
- 10A at 28VDC rating

TERMS	1	0	2
A-B			
A-C			



PART NO.	DESCRIPTION	QTY
0-496-50	10A	1

CHANGE-OVER OR ON/OFF/ON

Change-over or on/off/on, three position, single pole switch.

- Nickel plated brass lever
- 6.3mm blade terminals
- 13mm panel hole
- 10A at 28VDC rating

TERMS	1	0	2
A-B			
A-C			



PART NO.	DESCRIPTION	QTY
0-349-01	10A	1

CHANGE-OVER OR ON/OFF/ON

Change-over or on/off/on, three position, single pole switch.

- Rubber sealing gaiter over nickel plated brass lever
- 6.3mm blade terminals
- 13mm panel hole
- 10A at 28VDC rating



TERMS	1	0	2
A-B			
A-C			

PART NO.	DESCRIPTION	QTY
0-349-40	10A	1

OFF/A/A+B

Off/A/A+B, three position side and head lamp single pole switch.

- Nickel plated brass lever
- 6.3mm blade terminals
- 13mm panel hole
- 10A at 28VDC rating




TERMS	0	1	2
A-B			
A-C			

PART NO.	DESCRIPTION	QTY
0-645-00	10A	1

SWITCHES & INDICATORS DASHBOARD SWITCHES TOGGLE SWITCHES

STEERING COLUMN INDICATOR




Steering column indicator switch or on/off/on, three position single pole switch.

- For mounting on Ø 35-40mm column
- Stalk length 121mm
- Rated 6A at 12VDC and 3A at 24VDC

PART NO.	DESCRIPTION	QTY
0-612-00	6A	1

ON/ON/ON




On/on/on, single pole switch, with plastic paddle style lever.

- 6.3mm blade terminals
- 14.5mm panel hole
- 10A at 12VDC rating
- Replaces 35927 and 31788

PART NO.	DESCRIPTION	QTY
0-645-11	10A	1

ON/OFF/MOMENTARY ON OR MOMENTARY CHANGE-OVER




On/off/momentary on or momentary change-over, single pole switch biased off.

- Nickel plated brass lever
- 6.3mm blade terminals
- 13mm panel hole
- 10A at 28VDC rating

PART NO.	DESCRIPTION	QTY
0-496-01	10A	1

ON/OFF/MOMENTARY ON



On/off/momentary on, single pole switch, with rubber sealing gaiter over nickel plated brass lever.

- 6.3mm blade terminals
- 13mm panel hole
- 10A at 28VDC rating

PART NO.	DESCRIPTION	QTY
0-496-40	10A	1

ON/OFF/ON OR CHANGE-OVER



On/off/on or change-over, single pole switch, with plastic paddle style lever.

- 6.3mm blade terminals
- 14.5mm panel hole
- 10A at 12VDC rating
- Replaces 31743

PART NO.	DESCRIPTION	QTY
0-349-11	10A	1

MOMENTARY ON/OFF/MOMENTARY ON OR MOMENTARY CHANGE-OVER



Momentary on/off/momentary on or momentary change-over, single pole miniature lever switch.

- Chrome plated brass lever and solder lug terminals
- 6.5mm panel hole
- 5A at 28VDC rating
- Protected to IP67



PART NO.	DESCRIPTION	QTY
0-496-60	5A	1

CHANGE-OVER OR ON/OFF/ON



Change-over or on/off/on, three position, single pole switch centred off.

- Nylon paddle style lever
- 6.3mm blade terminals
- 13mm panel hole
- 10A at 12VDC rating



PART NO.	DESCRIPTION	QTY
0-349-00	10A	1

SWITCHES & INDICATORS DASHBOARD SWITCHES TOGGLE SWITCHES

DOUBLE POLE

MOMENTARY ON/OFF/MOMENTARY ON OR MOMENTARY CHANGE-OVER

Momentary on/off/momentary on or momentary change-over, double pole switch.

- Nickel plated brass lever
- 6.3mm blade terminals
- 13mm panel hole
- 10A at 28VDC rating



TERMS	1	0	2
A-B			
A-C			
D-E			
D-F			

PART NO.	DESCRIPTION	QTY
0-496-02	10A	1

METAL CHANGE-OVER OR ON/OFF/ON

Change-over or on/off/on, three position, double pole switch.

- Nickel plated brass lever
- 6.3mm blade terminals
- 13mm panel hole
- 10A at 28VDC rating



TERMS	1	0	2
A-B			
A-C			
D-E			
D-F			

PART NO.	DESCRIPTION	QTY
0-349-02	10A	1

ACCESSORIES

RUBBER SEALING GAITER

Rubber sealing gaiter for standard 12.5mm shafted toggle switches.



PART NO.	DESCRIPTION	QTY
0-603-99	Rubber sealing gaiter	10

TOGGLE SWITCH SAFETY GUARD

- Moulded red plastic
- Spring loaded
- Prohibits accidental switch activation
- Fits most 13mm toggle switches



PART NO.	DESCRIPTION	QTY
0-603-03	Safety guard	1

SWITCH PANEL

- Black plastic
- Ø 13mm hole



PART NO.	DESCRIPTION	QTY
0-241-01	One hole	1
0-242-01	Two holes	1

FACIA PLATE FOR METAL TOGGLE SWITCHES

- 13mm bodies
- "Off" is the up position



PART NO.	DESCRIPTION	QTY
0-603-06	Facia plate	10



Covering over 90% vehicle applications, Durite offers an extensive range of Switches & Indicators, including custom design switches and made-to-order switch panels. Durite carries stock of all fast-moving "everyday use" switches.

ROTARY SWITCHES

OFF/SIDE/HEAD




Off/side/head, three position rotary switch.

- Splash proof to DIN40 050, IP53
- Ø 12mm panel hole
- 29A at 12VDC rating

PART NO.	DESCRIPTION	QTY
0-656-04	29A	1

MOMENTARY ON/OFF/ MOMENTARY ON



Momentary change-over or momentary on/off/momentary on, rotary switch.

- Splash proof to DIN40, 050 IP53
- Ø 12mm panel hole
- 15A at 12VDC rating

PART NO.	DESCRIPTION	QTY
0-656-05	15A	1

OFF/ON/ON



Off/on/on, three position rotary switch.

- Splash proof to DIN40 050, IP53
- Ø 12mm panel hole
- 15A at 12VDC rating

PART NO.	DESCRIPTION	QTY
0-656-03	15A	1

SPLASH PROOF ON/OFF



On/off, rotary switch.

- Splash proof to DIN40 050, IP53
- Ø 12mm panel hole
- 15A at 12VDC rating

PART NO.	DESCRIPTION	QTY
0-656-02	15A	1

ON/OFF WITH 3 LENSES




On/off, rotary switch.

- Splash proof to DIN40 050, IP53
- Illumination for 12V only
- Supplied with a choice of red, amber and green lens
- Ø 12mm panel hole
- 15A at 12VDC rating

PART NO.	DESCRIPTION	QTY
0-656-00	15A	1

OFF/SIDE/DIP/MAIN HEADLAMP




Off/side/dip/main headlamp rotary switch, with horn push.

- 6.3mm blade terminals
- 14mm panel hole
- 20/4A at 12VDC rating
- 5/2A at 24VDC rating

PART NO.	DESCRIPTION	QTY
0-645-70	12/24V	1

WIPER SWITCH



Wiper switch on/on/on, for 2 speed and self-park wipers.

- 6.3mm blade terminals
- Ø 11mm panel hole
- 10A at 12VDC rating

PART NO.	DESCRIPTION	QTY
0-646-50	10A	1

INDICATOR SWITCH




Indicator switch or on/off/on, three position rotary switch.

- Plastic lever and screw terminals
- 27mm panel hole.
- 6A at 12VDC rating

PART NO.	DESCRIPTION	QTY
0-483-00	Indicator switch	1
0-484-00	Indicator switch with illuminated green plastic lever	1

LIGHT SWITCH



Light switch (off/side/dip/beam) or off/on/on/on, four position rotary switch.

- Plastic lever and screw terminals
- 27mm panel hole
- 11A at 12VDC rating

PART NO.	DESCRIPTION	QTY
0-645-60	11A	1

PUSH BUTTON SWITCHES

RUBBER SEAL



Push button, single pole switch, push to momentarily make.

- Rubber sealing gaiter and boot
- Screw terminals
- 22mm panel hole
- 12.5A at 12VDC rating

PART NO.	DESCRIPTION	QTY
0-485-50	12.5A	1

PUSH BUTTON



Push button single pole switch, push to momentarily make.

- Screw terminals
- 22mm panel hole up to 8mm deep
- 12.5A at 12VDC rating

PART NO.	DESCRIPTION	QTY
0-485-00	12.5A	1

PUSH BUTTON LUCAR TERMINALS



Push button single pole switch, push to momentarily make.

- 6.3 Lucar terminals
- 20mm panel hole
- 10A at 12VDC rating

PART NO.	DESCRIPTION	QTY
0-485-01	10A	1

PLASTIC PUSH BUTTON



Push button single pole switch, push to momentarily make.

- Screw terminals
- 14mm panel hole
- 10A at 12VDC rating

PART NO.	DESCRIPTION	QTY
0-485-02	10A	1

PUSH BUTTON HORN SWITCH



Momentary on, push button horn switch, single pole.

- Screw terminals
- 5A at 12VDC rating
- Replaces SPB160

PART NO.	DESCRIPTION	QTY
0-485-75	5A	1

STAINLESS PUSH BUTTON



Push button switch, stainless steel button and nickel plated brass body, push to momentarily make.

- Screw terminals
- 19mm panel hole
- 6A at 12VDC rating
- Intermittent amps is 16A for 5 seconds

PART NO.	DESCRIPTION	QTY
0-485-03	16A	1

MINI PUSH ON/PUSH OFF




Push on/push off, single pole miniature switch.

- Plastic button
- 2.0mm solder tags
- 7mm panel hole
- 0.5A at 30VDC rating

PART NO.	DESCRIPTION	QTY
0-485-92	0.5A	1

HAZARD WARNING LIGHT



Hazard warning light switch, push-on/push-off with 12V 1.2W panel bulb illumination.

- 7 x 6.3mm blade terminals
- 30mm panel hole

PART NO.	DESCRIPTION	QTY
0-484-50	1.2W	1

MINI MOMENTARY ON




Momentary on, push button, single pole miniature switch.

- Plastic button
- 2.0mm solder tags
- 7mm panel hole
- 0.5A at 30VDC rating

PART NO.	DESCRIPTION	QTY
0-485-04	0.5A	1

SWITCHES & INDICATORS DASHBOARD SWITCHES PUSH BUTTON SWITCHES

12/24V LED



On/off, push-push single pole switch, with 12/24V LED indicator.

- 4.8mm blade terminals
- Snap fits into Ø 20mm panel hole
- 20A at 12VDC rating
- 10A at 24VDC rating

Colours available.


PART NO.

DESCRIPTION

QTY

0-690-50	Momentary on, black non illuminated	1
0-690-51	Black non illuminated	1
0-690-54	Green LED illuminated	1
0-690-55	Red LED illuminated	1
0-690-60	Amber LED illuminated	1

SURFACE MOUNTING WITH LED INDICATORS



Push on/push off, single pole switch, for surface mounting.

- 12/24V LED indicators; red "Off" and green "On"
- Self adhesive pad for quick fixing
- Supplied with 900mm lead
- 1.0A at 12VDC rating

PART NO.

DESCRIPTION

QTY

0-485-91	1.0A	1
----------	------	---

METAL BUTTON



Push on/push off, single pole switch.

- Metal button
- 6.3mm blade terminals
- 13mm panel hole
- 6A at 12VDC rating


PART NO.

DESCRIPTION

QTY

0-485-90	6A	1
----------	----	---

MOMENTARY LED ILLUMINATION



Momentary on, single pole, push button switch, 12V red LED illumination.

- Screw terminals
- 22mm panel hole
- 20A at 12VDC rating

PART NO.

DESCRIPTION

QTY

0-485-05	20A	1
----------	-----	---

PUSH/PULL SWITCHES

ON/OFF PUSH/PULL



On/off, single pole push pull switch, with 14mm button and screw terminals.

- Fits 8.5mm panel hole up to 12mm deep
- 12.5A at 24VDC rating


PART NO.

DESCRIPTION

QTY

0-597-50	12.5A	1
----------	-------	---

ON/OFF PUSH/PULL WITH 12V ILLUMINATION



On/off, single pole push-pull switch, with 12V illumination.

- 6.3mm blade terminals
- 13mm diameter panel hole
- 10A at 12VDC rating


PART NO.

DESCRIPTION

QTY

0-597-14	Green	1
0-597-15	Red	1
0-597-20	Amber	1

OFF/SIDE/HEAD LIGHT PUSH/PULL SWITCH



Off/side/head light push/pull switch - 10A at 12V.

- Off/on A/on A+B, single pole side and head light push pull switch
- Screw terminals
- 10.5mm panel hole
- 10 amps at 12VDC rating

PART NO.

DESCRIPTION

QTY

0-645-50	10A	1
----------	-----	---

DOOR AND FOOT SWITCHES

ADJUSTABLE PLUNGER




Courtesy door switch with 20 to 6.5mm adjustable spring loaded plunger. The switch should be fitted with the plunger fully out, and then the door closed to permanently adjust plunger length automatically.

- Universal elongated fixing hole
- Panel clearance 40mm
- Non-corroding copper terminals and fittings

PART NO. QTY

0-486-00 1

SPRING LOADED PLUNGER




Courtesy door switch, 16mm spring loaded plunger with 9.5mm movement.

- Panel clearance 33mm
- Non-corroding copper terminals and fittings
- For most modern Fords

PART NO. DESCRIPTION QTY

0-486-01 Spring plunger 1

TELESCOPIC PLUNGER




Courtesy door switch, with 47mm long spring loaded telescopic plunger.

- Designed as a bonnet switch for vehicle alarms
- Panel clearance 29mm
- Non-corroding copper terminals and fittings

PART NO. DESCRIPTION QTY

0-486-02 Telescopic plunger 1

BRAKE LIGHT NORMALLY OPEN

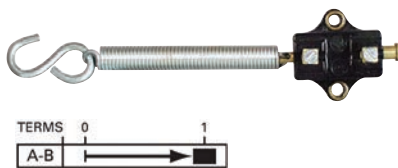


Brake light switch, single pole, normally open with screw terminals.

- Can be pulled or pushed to make the circuit
- Rated 4A at 12VDC
- Supplied with spring, hook and rubber boot.

PART NO. DESCRIPTION QTY

0-579-51 4A 1

FOOT OPERATED SWITCH

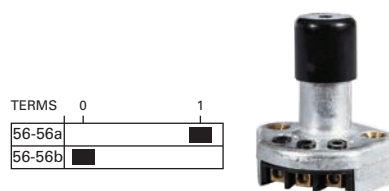

Change over, foot operated dip switch, with screw terminals.


PART NO. DESCRIPTION QTY

0-658-50 Foot operated 1

DURITE



WE'RE ON SOCIAL MEDIA FOLLOW US @DURITELIMITED

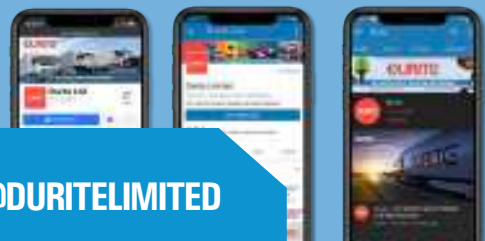

PUSH BUTTON CONTROLS

PRE-MADE PUSH BUTTON CONTROLS

EMERGENCY STOP BUTTON

Emergency stop button, single pole, normally closed contact.

- Operated by mushroom push button
- Turn to reset
- Protected to IP65
- Schneider Electric reference XAL-K178



PART NO.	DESCRIPTION	QTY
0-657-01	Emergency stop button	1

TWO BUTTON

Two button, single pole, normally open contacts.

- Operated by spring return push buttons.
- Protected to IP65
- Schneider Electric reference XAL-D222



PART NO.	DESCRIPTION	QTY
0-657-02	Two button	1

THREE BUTTON

Three button, single pole, two normally open and one normally closed contacts.

- Operated by spring return push buttons
- Protected to IP65
- Schneider Electric reference XAL-D324



PART NO.	DESCRIPTION	QTY
0-657-03	Three button	1

TWO BUTTON PISTOL GRIP

Two button, pendant polypropylene pistol grip with mechanically interlocked switches.

- Two single pole, normally open contacts
- Protected to IP65
- Schneider Electric reference XAC-A201



PART NO.	DESCRIPTION	QTY
0-657-00	Pistol grip	1

TOOLS

PLASTIC SPANNER



Plastic spanner for tightening push button and key switch nuts.

- Schneider Electric reference ZB5-AZ905.

PART NO.	DESCRIPTION	QTY
0-657-99	Spanner	1

CUSTOMISE YOUR PUSH BUTTON

STEP1 | SELECT YOUR HOUSING

 Can be fitted with up to 3 switch blocks per button.

SINGLE BUTTON

- Single button housing, fitted with contact block mounting plate
- Schneider Electric reference XAL-D01



PART NO.	DESCRIPTION	QTY
0-657-11	Single button	1

TWO BUTTON

- Two button housing, fitted with contact block mounting plate
- Schneider Electric reference XAL-D02



PART NO.	DESCRIPTION	QTY
0-657-12	Two button	1

THREE BUTTON

- Three button housing, fitted with contact block mounting plate
- Schneider Electric reference XAL-D03



PART NO.	DESCRIPTION	QTY
0-657-13	Three button	1

SWITCHES & INDICATORS DASHBOARD SWITCHES PUSH BUTTON CONTROLS

STEP2 | SELECT YOUR SWITCH BLOCK

NORMALLY OPEN

Switch block, single pole normally open.

- Rated at 0.4A at 24VDC
- Schneider Electric reference ZEN-L1111



PART NO.	DESCRIPTION	QTY
0-657-20	Normally open	1

NORMALLY CLOSED

Switch block, single pole normally closed.

- Rated at 0.4A at 24VDC
- Schneider Electric reference ZEN-L1121



PART NO.	DESCRIPTION	QTY
0-657-21	Normally closed	1

NORMALLY OPEN, FOR PENDANT

Switch block, single pole for pendant, normally open.

- Rated at 0.4A at 24VDC
- Schneider Electric reference ZB2-BE101



PART NO.	DESCRIPTION	QTY
0-657-22	For pendant	1

STEP3 | SELECT YOUR PUSH BUTTON

FLUSH PUSH BUTTON, SPRING RETURN

Clear boot for use with flush push button range above.

- Increases protection to IP66
- Schneider Electric reference ZBP-0

PART NO.	DESCRIPTION	QTY
0-657-31	Schneider Electric reference ZB5-AA334	1
0-657-32	Schneider Electric reference ZB5-AA335	1
0-657-30	Schneider Electric reference ZB5-AA432	1
0-657-50	Clear boot	1



TWO POSITION ROTARY SWITCH

Two position, on/off or change over, rotary switch.

- Schneider Electric reference ZB5-AD2



PART NO.	DESCRIPTION	QTY
0-657-40	Rotary switch	1

PUSH BUTTON ISOLATOR

Push button security isolator.

- 40mm mushroom head
- Twist to release.
- Schneider Electric reference ZB5-AS844



PART NO.	DESCRIPTION	QTY
0-657-37	Push button	1

PUSH OFF ISOLATOR

Push off security isolator.

- Key release only
- Supplied with 2 keys
- Schneider Electric reference ZB5-AS934



PART NO.	DESCRIPTION	QTY
0-657-38	Push off	1

ON/OFF ISOLATOR

On/off security isolator.

- Can be locked on or locked off
- Key removable in both positions
- Supplied with 2 keys
- Schneider Electric reference ZB5-AG4



PART NO.	DESCRIPTION	QTY
0-657-39	On/off	1

POWER INVERTERS

GET AC POWER ANYWHERE ANYTIME



WHY DURITE INVERTERS?

- ✓ Highest quality industrial components
- ✓ Protected against overload, over temperature & short circuits
- ✓ Covers 12 & 24V applications, 110V to 240V power output



MODIFIED WAVE

- ✓ Economical option
- ✓ Ideal for simpler current loads such as lighting and motors
- ✓ Works with most equipment
- ✓ An approximate reproduction of mains power wave (110VAC & 230VAC)



SINE WAVE

- ✓ Suitable for all applications
- ✓ Ideal for sensitive electronic devices such as laptops and TV's
- ✓ An exact reproduction of mains power (110VAC & 230VAC)



125W TO 3000W POWER INVERTERS

GET POWER ANYWHERE, ANYTIME WITH DURITE INVERTERS.
OVER 45 MODELS AVAILABLE.

For the full Durite range of Power Inverters, see pages 198–201.

04

CABLE & WIRING ACCESSORIES



**YOUR ONE-STOP SHOP
FOR VEHICLE WIRING
WITH 2,000 QUALITY
PARTS AVAILABLE.**

CABLE	128
CONNECTORS	140
TERMINALS	142
MULTIPLE CONNECTORS	157
TERMINAL BOXES	163
TUBING & SLEEVING	164
FIXINGS & ACCESSORIES.....	170
POWER TRANSFER	174
FUSES	179
CIRCUIT BREAKERS.....	186
FUSE HOLDERS & BOXES.....	188
WIRING ASSORTMENT BOXES.....	193

CABLE - SINGLE CORE

PVC AUTO CABLE

THIN WALL PVC SINGLE CORE


ISO6722:2006 Class B

60 volt DC

Maximum Temperature: -40° to 105°C

(120°C intermittent)


0.75MM² CROSS SECTION



CONDUCTOR	CURRENT RATING	RESISTANCE	REEL LENGTH
24/0.20mm	14A	24.7mΩ/m @ 20°C	100m

PART NO.	DESCRIPTION	PART NO.	DESCRIPTION	PART NO.	DESCRIPTION
0-931-01	Black	0-931-05	Red	0-931-09	Grey
0-931-02	Blue	0-931-06	Purple	0-931-10	Orange
0-931-03	Brown	0-931-07	White	0-931-11	Pink
0-931-04	Green	0-931-08	Yellow	0-931-40	Light green

1.0MM² CROSS SECTION




CONDUCTOR	CURRENT RATING	RESISTANCE	REEL LENGTH
32/0.20mm	16.5A	18.5mΩ/m @ 20°C	100m

PART NO.	DESCRIPTION	PART NO.	DESCRIPTION	PART NO.	DESCRIPTION
0-932-01	Black	0-932-11	Pink	0-932-34	Brown/green
0-932-02	Blue	0-932-12	Black/blue	0-932-35	Brown/red
0-932-03	Brown	0-932-14	Black/green	0-932-37	Brown/white
0-932-04	Green	0-932-15	Black/red	0-932-38	Brown/yellow
0-932-05	Red	0-932-17	Black/white	0-932-40	Light green
0-932-06	Purple	0-932-18	Black/yellow	0-932-41	Green/black
0-932-07	White	0-932-21	Blue/black	0-932-42	Green/blue
0-932-08	Yellow	0-932-23	Blue/brown	0-932-43	Green/brown
0-932-09	Grey	0-932-24	Blue/green	0-932-45	Green/red
0-932-10	Orange	0-932-25	Blue/red	0-932-46	Green/purple
		0-932-27	Blue/white	0-932-47	Green/white
		0-932-28	Blue/yellow	0-932-48	Green/yellow
		0-932-31	Brown/black	0-932-51	Red/black
				0-932-54	Red/green
				0-932-57	Red/white
				0-932-58	Red/yellow
				0-932-61	Purple/black
				0-932-67	Purple/white
				0-932-71	White/black
				0-932-72	White/blue
				0-932-73	White/brown
				0-932-74	White/green
				0-932-75	White/red
				0-932-81	Yellow/black
				0-932-82	Yellow/blue
				0-932-87	Yellow/white

1.5MM² CROSS SECTION

CONDUCTOR	CURRENT RATING	RESISTANCE
21/0.30mm	21A	12.7mΩ/m @ 20°C


REEL LENGTH
100m



PART NO.	DESCRIPTION	PART NO.	DESCRIPTION
0-930-01	Black	0-930-06	Purple
0-930-02	Blue	0-930-07	White
0-930-03	Brown	0-930-08	Yellow
0-930-04	Green	0-930-09	Grey
0-930-05	Red	0-930-10	Orange
		0-930-11	Pink

2.0MM² CROSS SECTION

CONDUCTOR	CURRENT RATING	RESISTANCE	REEL LENGTH
28/0.30mm	25A	9.4mΩ/m @ 20°C	100m




PART NO.	DESCRIPTION	PART NO.	DESCRIPTION
0-933-01	Black	0-933-10	Orange
0-933-02	Blue	0-933-11	Pink
0-933-03	Brown	0-933-15	Black/red
0-933-04	Green	0-933-25	Blue/red
0-933-05	Red	0-933-27	Blue/white
0-933-06	Purple	0-933-40	Light green
0-933-07	White	0-933-41	Green/black
0-933-08	Yellow	0-933-45	Green/red
0-933-09	Grey	0-933-75	White/red

CABLE & WIRING ACCESSORIES CABLE SINGLE CORE PVC AUTO CABLE

2.5MM² CROSS SECTION

CONDUCTOR	CURRENT RATING	RESISTANCE	REEL LENGTH
35/0.30mm	29A	7.6mΩ/m @ 20°C	50m


PART NO.	DESCRIPTION
0-934-01	Black
0-934-03	Brown
0-934-05	Red



3.0MM² CROSS SECTION

CONDUCTOR	CURRENT RATING	RESISTANCE	REEL LENGTH
44/0.30mm	33A	6.0mΩ/m @ 20°C	30m


PART NO.	DESCRIPTION
0-935-01	Black
0-935-03	Brown
0-935-05	Red



4.5MM² CROSS SECTION

CONDUCTOR	CURRENT RATING	RESISTANCE
65/0.30mm	42A	4.06mΩ/m @ 20°C


PART NO.	DESCRIPTION	REEL LENGTH
0-936-01	Black	30m
4-936-01	Black	100m
0-936-03	Brown	30m
0-936-05	Red	30m
4-936-05	Red	100m



6.0MM² CROSS SECTION

CONDUCTOR	CURRENT RATING	RESISTANCE
84/0.30mm	50A	3.14mΩ/m @ 20°C


PART NO.	DESCRIPTION	REEL LENGTH
0-937-01	Black	30m
4-937-01	Black	100m
0-937-03	Brown	30m
4-937-03	Brown	100m
0-937-05	Red	30m
4-937-05	Red	100m



7.0MM² CROSS SECTION

CONDUCTOR	CURRENT RATING	RESISTANCE	REEL LENGTH
97/0.30mm	57A	2.79mΩ/m @ 20°C	30m


PART NO.	DESCRIPTION
0-939-01	Black
0-939-03	Brown
0-939-05	Red



8.5MM² CROSS SECTION

CONDUCTOR	CURRENT RATING	RESISTANCE	REEL LENGTH
120/0.30mm	63A	2.20mΩ/m @ 20°C	30m


PART NO.	DESCRIPTION
0-938-01	Black
0-938-03	Brown
0-938-05	Red



10.0MM² CROSS SECTION

CONDUCTOR	CURRENT RATING	RESISTANCE
80/0.40mm	70A	1.82mΩ/m @ 20°C


PART NO.	DESCRIPTION	REEL LENGTH
0-940-01	Black	30m
4-940-01	Black	100m
0-940-05	Red	30m
4-940-05	Red	100m



CABLE & WIRING ACCESSORIES CABLE SINGLE CORE PVC AUTO CABLE


SINGLE CORE PVC AUTO CABLE

BS6862

0.65MM² CROSS SECTION


CONDUCTOR	CURRENT RATING	RESISTANCE	REEL LENGTH
9/0.30mm	5.75A	29.4mΩ/m @ 20°C	50m

PART NO.	DESCRIPTION	PART NO.	DESCRIPTION	PART NO.	DESCRIPTION
0-941-01	black	0-941-06	purple	0-941-11	pink
0-941-02	blue	0-941-07	white	0-941-15	black/red
0-941-03	brown	0-941-08	yellow	0-941-28	blue/yellow
0-941-04	green	0-941-09	grey	0-941-40	light green
0-941-05	red	0-941-10	orange		

1.0MM² CROSS SECTION

CONDUCTOR	CURRENT RATING	RESISTANCE	REEL LENGTH
14/0.30mm	8.75A	18.9mΩ/m @ 20°C	50m

PART NO.	DESCRIPTION	PART NO.	DESCRIPTION	PART NO.	DESCRIPTION	PART NO.	DESCRIPTION
0-942-01	black	0-942-14	black/green	0-942-37	brown/white	0-942-57	red/white
0-942-02	blue	0-942-15	black/red	0-942-38	brown/yellow	0-942-58	red/yellow
0-942-03	brown	0-942-18	black/yellow	0-942-40	light green	0-942-61	purple/black
0-942-04	green	0-942-21	blue/black	0-942-41	green/black	0-942-67	purple/white
0-942-05	red	0-942-23	blue/brown	0-942-42	green/blue	0-942-71	white/black
0-942-06	purple	0-942-24	blue/green	0-942-43	green/brown	0-942-72	white/blue
0-942-07	white	0-942-25	blue/red	0-942-45	green/red	0-942-73	white/brown
0-942-08	yellow	0-942-27	blue/white	0-942-46	green/purple	0-942-74	white/green
0-942-09	grey	0-942-28	blue/yellow	0-942-47	green/white	0-942-75	white/red
0-942-10	orange	0-942-31	brown/black	0-942-48	green/yellow	0-942-81	yellow/black
0-942-11	pink	0-942-34	brown/green	0-942-51	red/black	0-942-82	yellow/blue
0-942-12	black/blue	0-942-35	brown/red	0-942-54	red/green	0-942-87	yellow/white

2.0MM² CROSS SECTION

CONDUCTOR	CURRENT RATING	RESISTANCE	REEL LENGTH
28/0.30mm	17.5A	9.4mΩ/m @ 20°C	50m

PART NO.	DESCRIPTION	PART NO.	DESCRIPTION	PART NO.	DESCRIPTION
0-943-01	black	0-943-07	white	0-943-27	blue/white
0-943-02	blue	0-943-08	yellow	0-943-40	light green
0-943-03	brown	0-943-09	grey	0-943-41	green/black
0-943-04	green	0-943-11	pink	0-943-45	green/red
0-943-05	red	0-943-15	black/red	0-943-75	white/red
0-943-06	purple	0-943-25	blue/red		


CABLE & WIRING ACCESSORIES CABLE SINGLE CORE PVC AUTO CABLE

2.5MM² CROSS SECTION

CONDUCTOR	CURRENT RATING	RESISTANCE	REEL LENGTH
35/0.30mm	21.75A	7.5mΩ/m @ 20°C	50m

PART NO. DESCRIPTION


0-944-01	black
0-944-03	brown
0-944-05	red

3.0MM² CROSS SECTION

CONDUCTOR	CURRENT RATING	RESISTANCE
44/0.30mm	27.5A	6.0mΩ/m @ 20°C

PART NO. DESCRIPTION REEL LENGTH


0-945-01	black	50m
4-945-01	black	100m
0-945-02	blue	50m
0-945-03	brown	50m
0-945-05	red	50m
4-945-05	red	100m
0-945-08	yellow	50m
0-945-38	brown/yellow	50m

4.5MM² CROSS SECTION

CONDUCTOR	CURRENT RATING	RESISTANCE
65/0.30mm	35A	4.1mΩ/m @ 20°C

PART NO. DESCRIPTION REEL LENGTH


0-946-01	black	30m
4-946-01	black	100m
0-946-03	brown	30m
0-946-05	red	30m
4-946-05	red	100m

6.0MM² CROSS SECTION

CONDUCTOR	CURRENT RATING	RESISTANCE	REEL LENGTH
84/0.30mm	42A	3.1mΩ/m @ 20°C	30m

PART NO. DESCRIPTION


0-947-01	black
0-947-03	brown
0-947-05	red

7.0MM² CROSS SECTION

CONDUCTOR	CURRENT RATING	RESISTANCE	REEL LENGTH
97/0.30mm	50A	2.7mΩ/m @ 20°C	30m

PART NO. DESCRIPTION


0-949-01	black
0-949-03	brown
0-949-05	red

8.5MM² CROSS SECTION

CONDUCTOR	CURRENT RATING	RESISTANCE	REEL LENGTH
120/0.30mm	60A	2.2mΩ/m @ 20°C	30m

PART NO. DESCRIPTION


0-948-01	black
0-948-03	brown
0-948-05	red

10.0MM² CROSS SECTION

CONDUCTOR	CURRENT RATING	RESISTANCE	REEL LENGTH
80/0.40mm	70A	1.8mΩ/m @ 20°C	30m

PART NO. DESCRIPTION

0-950-01	black
0-950-03	brown
0-950-05	red



TWIN CORE CABLE


FLAT TWIN CORE PVC AUTO CABLE

BS6862 - PVC auto cable

ISO6722:2006 Class B - Thin wall cable

2 X 0.65MM² CROSS SECTION


CONDUCTOR	CURRENT RATING	RESISTANCE
2x9/0.30mm	5.75A	29.4mΩ/m @ 20°C



PART NO.	DESCRIPTION	REEL LENGTH
0-951-00	Red/black, sheathed black	30m
3-951-00	Red/black, sheathed black	100m

2 X 1.0MM² CROSS SECTION


CONDUCTOR	CURRENT RATING	RESISTANCE
2x14/0.30mm	8.75A	18.9mΩ/m @ 20°C



PART NO.	DESCRIPTION	REEL LENGTH
0-952-51	Red/black, sheathed black	30m
3-952-51	Red/black, sheathed black	100m

2 X 2.0MM² CROSS SECTION


CONDUCTOR	CURRENT RATING	RESISTANCE
2x28/0.30mm	17.5A	9.4mΩ/m @ 20°C



PART NO.	DESCRIPTION	REEL LENGTH
0-953-00	Red/black, sheathed black	30m
3-953-00	Red/black, sheathed black	100m
4-953-00	Red/black, sheathed black	500m

2 X 3.0MM² CROSS SECTION


CONDUCTOR	CURRENT RATING	RESISTANCE
2x44/0.30mm	27.5A	6.0mΩ/m @ 20°C



PART NO.	DESCRIPTION	REEL LENGTH
0-953-51	Red/black, sheathed black	30m

2 X 0.75MM² CROSS SECTION THIN WALL


CONDUCTOR	CURRENT RATING	RESISTANCE
2x24/0.20mm	14A	24.7mΩ/m @ 20°C



PART NO.	DESCRIPTION	REEL LENGTH
4-953-52	Red/black, sheathed black	500m
3-953-52	Red/black, sheathed black	100m

2 X 1.0MM² CROSS SECTION THIN WALL


CONDUCTOR	CURRENT RATING	RESISTANCE
2x32/0.20mm	16.5A	18.5mΩ/m @ 20°C



PART NO.	DESCRIPTION	REEL LENGTH
0-951-50	Red/black, sheathed black	30m
3-951-50	Red/black, sheathed black	100m
0-951-52	Blue/brown, sheathed black	30m

2 X 2.0MM² CROSS SECTION THIN WALL


CONDUCTOR	CURRENT RATING	RESISTANCE
2x28/0.30mm	25A	9.4mΩ/m @ 20°C



PART NO.	DESCRIPTION	REEL LENGTH
0-953-50	Red/black, sheathed black	30m
3-953-50	Red/black, sheathed black	100m
4-953-50	Red/black, sheathed black	500m

2 X 4.5MM² CROSS SECTION

CONDUCTOR	CURRENT RATING	RESISTANCE
2x65/0.30mm	35A	4.1mΩ/m @ 20°C



PART NO.	DESCRIPTION	REEL LENGTH
0-955-00	Red/black, sheathed black	30m


CABLE & WIRING ACCESSORIES CABLE TWIN CORE & MULTI CORE CABLE

BS6862

ROUND TWIN CORE PVC AUTO CABLE

2 X 0.65MM² CROSS SECTION


CONDUCTOR	CURRENT RATING	RESISTANCE
2x9/0.30mm	5.75A	29.4mΩ/m @ 20°C



PART NO.	DESCRIPTION	REEL LENGTH
0-951-51	Red/black, sheathed black	30m

2 X 1.0MM² CROSS SECTION

CONDUCTOR	CURRENT RATING	RESISTANCE
2x14/0.30mm	8.75A	18.9mΩ/m @ 20°C




PART NO.	DESCRIPTION	REEL LENGTH
0-952-00	Red/black, sheathed black	30m

2 X 1.0MM² CROSS SECTION THIN WALL

CONDUCTOR	CURRENT RATING	RESISTANCE	THIN WALL
2x32/0.20mm	16.5A	18.5mΩ/m @ 20°C	

PART NO.	DESCRIPTION	REEL LENGTH
4-952-00	Red/black, sheathed black ISO6722:2006 (CLASS B)	100m



BS6862 - PVC auto cable
ISO6722:2006 Class B - Thin wall cable



3 X 0.50MM² CROSS SECTION THIN WALL

CONDUCTOR	CURRENT RATING	OUTSIDE Ø
3x16/0.20mm	11A	4.9mm



PART NO.	DESCRIPTION	REEL LENGTH
0-994-60	Red/green/black	100m



4 X 0.65MM² CROSS SECTION

CONDUCTOR	CURRENT RATING	OUTSIDE Ø
4x9/0.30mm	5.75A	7.5mm

MULTI CORE CABLE
3 CORE

3 X 1.0MM² CROSS SECTION THIN WALL

CONDUCTOR	CURRENT RATING	OUTSIDE Ø
3x32/0.20mm	16.5A	5.5mm

PART NO.	DESCRIPTION	REEL LENGTH
0-994-50	Red/green/black	30m

4 CORE

PART NO.	DESCRIPTION	REEL LENGTH
0-993-00	Brown, red, green and white, sheathed black	30m
3-993-00	Brown, red, green and white, sheathed black	100m



4 CORE

BS6862 - PVC auto cable
ISO6722:2006 Class B - Thin wall cable

4 X 0.75MM² CROSS SECTION THIN WALL

CONDUCTOR	CURRENT RATING	OUTSIDE Ø	PART NO.	DESCRIPTION	REEL LENGTH
4x24/0.20mm	14A	5.9mm	0-993-40	Brown, red, green and white, sheathed black	100m



4 X 1.0MM² CROSS SECTION THIN WALL

CONDUCTOR	CURRENT RATING	OUTSIDE Ø
4x32/0.20mm	16.5A	5.8mm


PART NO.	DESCRIPTION	REEL LENGTH
0-993-50	Brown, red, green and white, sheathed black	30m
3-993-50	Brown, red, green and white, sheathed black	100m

4 X 1.0MM² CROSS SECTION

CONDUCTOR	CURRENT RATING	OUTSIDE Ø
4x14/0.30mm	8.75A	8.0mm

PART NO.	DESCRIPTION	REEL LENGTH
0-993-01	Brown, red, green and white, sheathed black	30m
3-993-01	Brown, red, green and white, sheathed black	100m

5 CORE



4 X 1.0MM² / 1 X 2.0MM² CROSS SECTION

CONDUCTOR	OUTSIDE Ø
4x14/0.30mm 1x28/0.30mm	8.9mm

PART NO.	DESCRIPTION	REEL LENGTH
0-995-00	Brown, red, green, yellow and white, sheathed black	30m

5 X 1.0MM² CROSS SECTION THIN WALL

CONDUCTOR	CURRENT RATING	OUTSIDE Ø
5x32/0.20mm	16.5A	6.3mm

PART NO.	DESCRIPTION	REEL LENGTH
0-995-50	Brown, red, green, yellow and white, sheathed black	30m

7 CORE



5 X 1.5MM² / 2 X 4MM² CROSS SECTION EBS

CONDUCTOR	OUTSIDE Ø
5x21/0.30mm 2x56/0.30mm	11.2mm

🔧 Suitable for ISO 7638 connectors.

PART NO.	DESCRIPTION	REEL LENGTH
0-997-20	Black, yellow, white, white/green, white/brown, red and brown	30m

6 X 1.5MM² / 1 X 2.5MM² CROSS SECTION

CONDUCTOR	OUTSIDE Ø
6x21/0.30mm 1x35/0.30mm	11.2mm

PART NO.	DESCRIPTION	REEL LENGTH
0-997-15	Brown, red, green, yellow, blue, black, white and grey sheath	30m

6 X 1.0MM² / 1 X 2.0MM² CROSS SECTION

CONDUCTOR		OUTSIDE Ø
6x14/0.30mm	1x28/0.30mm	10.2mm

PART NO.	DESCRIPTION	REEL LENGTH
0-997-00	Brown, red, green, yellow, blue, black and white	30m
0-997-05	Brown, red, green, yellow, blue, black and white	10m
3-997-00	Brown, red, green, yellow, blue, black and white	100m

6 X 1.0MM² / 1 X 2.0MM² CROSS SECTION THIN WALL

CONDUCTOR		OUTSIDE Ø
6x32/0.20mm	1x28/0.30mm	8.3mm

PART NO.	DESCRIPTION	REEL LENGTH
0-997-65	Brown, red, green, yellow, blue, black and white	30m
3-997-65	Brown, red, green, yellow, blue, black and white	100m

7 X 0.65MM² CROSS SECTION LIGHT DUTY


CONDUCTOR	CURRENT RATING	OUTSIDE Ø
7x9/0.30mm	5.75A	8.9mm

PART NO.	DESCRIPTION	REEL LENGTH
0-997-10	Brown, red, green, yellow, blue, black and white	100m

7 X 0.75MM² CROSS SECTION THIN WALL

CONDUCTOR	CURRENT RATING	OUTSIDE Ø
7x24/0.20mm	14A	6.8mm

PART NO.	DESCRIPTION	REEL LENGTH
0-997-60	Brown, red, green, yellow, blue, black and white	30m
3-997-60	Brown, red, green, yellow, blue, black and white	100m

**8 CORE****7 X 1.0MM² / 1 X 2.0MM² CROSS SECTION THIN WALL**

CONDUCTOR		OUTSIDE Ø
7x32/0.20mm	1x28/0.30mm	8.5mm

PART NO.	DESCRIPTION	REEL LENGTH
0-998-01	Brown, red, green, yellow, blue, black, purple and white	10m
4-998-01	Brown, red, green, yellow, blue, black, purple and white	100m

**13 CORE****12 X 1.5MM² / 1 X 2.5MM² CROSS SECTION THIN WALL**

CONDUCTOR		OUTSIDE Ø
12x21/0.30mm	1x35/0.30mm	12mm

PART NO.	DESCRIPTION	REEL LENGTH
0-999-13	Brown, green, yellow, blue, black, purple, pink, grey, light brown, red/black, red, orange and white	10m
3-999-13	Brown, green, yellow, blue, black, purple, pink, grey, light brown, red/black, red, orange and white	30m
4-999-13	Brown, green, yellow, blue, black, purple, pink, grey, light brown, red/black, red, orange and white	50m

8 X 1.5MM² / 5 X 2.5MM² CROSS SECTION THIN WALL


CONDUCTOR		OUTSIDE Ø
8x30/0.25mm	5x50/0.25mm*	12.8mm

PART NO.	DESCRIPTION	REEL LENGTH
0-999-63	Red, brown, green, yellow, blue, black, pink, grey*, white/ blue, orange*, white*, white/ red* and white/black*	10m
3-999-63	Red, brown, green, yellow, blue, black, pink, grey*, white/ blue, orange*, white, white/ red* and white/black*	30m

🔧 Suitable for ISO 11446 connectors.

HEAVY-DUTY CABLE

FLEXIBLE STARTER CABLE BS6862



16MM² CROSS SECTION

CONDUCTOR	CURRENT RATING	OUTSIDE Ø
224/0.30mm	110A	9mm
PART NO.	DESCRIPTION	REEL LENGTH
0-978-01	Black	10m
3-978-01	Black	30m
4-978-01	Black	100m
0-978-05	Red	10m
3-978-05	Red	30m
4-978-05	Red	100m

40MM² CROSS SECTION

CONDUCTOR	CURRENT RATING	OUTSIDE Ø
315/0.40mm	300A	12.2mm
PART NO.	DESCRIPTION	REEL LENGTH
0-982-10	Black	10m
3-982-10	Black	30m
4-982-10	Black	100m
0-982-15	Red	10m
3-982-15	Red	30m
4-982-15	Red	100m

20MM² CROSS SECTION

CONDUCTOR	CURRENT RATING	OUTSIDE Ø
266/0.30mm	135A	9.5mm
PART NO.	DESCRIPTION	REEL LENGTH
0-980-11	Black	10m
3-980-11	Black	30m
0-979-15	Red	10m
3-979-15	Red	30m

50MM² CROSS SECTION

CONDUCTOR	CURRENT RATING	OUTSIDE Ø
640/0.30mm	345A	13.5mm
PART NO.	DESCRIPTION	REEL LENGTH
0-977-10	Black	10m
3-977-10	Black	30m
0-977-15	Red	10m
3-977-15	Red	30m

25MM² CROSS SECTION

CONDUCTOR	CURRENT RATING	OUTSIDE Ø
196/0.40mm	170A	9.7mm
PART NO.	DESCRIPTION	REEL LENGTH
0-981-10	Black	10m
3-981-10	Black	30m
4-981-10	Black	100m
0-981-15	Red	10m
3-981-15	Red	30m
4-981-15	Red	100m

60MM² CROSS SECTION

CONDUCTOR	CURRENT RATING	OUTSIDE Ø
475/0.40mm	415A	14.6mm
PART NO.	DESCRIPTION	REEL LENGTH
0-983-10	Black	10m
3-983-10	Black	30m
0-983-15	Red	10m
3-983-15	Red	30m


35MM² CROSS SECTION

CONDUCTOR	CURRENT RATING	OUTSIDE Ø
451/0.30mm	240A	11.7mm
PART NO.	DESCRIPTION	REEL LENGTH
0-976-10	Black	10m
3-976-10	Black	30m
4-976-10	Black	100m
0-976-15	Red	10m
3-976-15	Red	30m
4-976-15	Red	100m

70MM² CROSS SECTION

CONDUCTOR	CURRENT RATING	OUTSIDE Ø
905/0.30mm	485A	15.8mm
PART NO.	DESCRIPTION	REEL LENGTH
0-977-01	Black	10m
3-977-01	Black	30m
0-977-05	Red	10m
3-977-05	Red	30m

CABLE & WIRING ACCESSORIES CABLE HEAVY-DUTY CABLE



STARTER CABLE BS6862

20MM² CROSS SECTION

CONDUCTOR	CURRENT RATING	OUTSIDE Ø
266/0.30mm	135A	9mm

PART NO.	DESCRIPTION	REEL LENGTH
0-980-01	Black	10m
0-979-05	Red	10m

60MM² CROSS SECTION

CONDUCTOR	CURRENT RATING	OUTSIDE Ø
61/1.13mm	415A	14.1mm

PART NO.	DESCRIPTION	REEL LENGTH
0-983-00	Black	10m
3-983-00	Black	30m
0-983-05	Red	10m
3-983-05	Red	30m

25MM² CROSS SECTION

CONDUCTOR	CURRENT RATING	OUTSIDE Ø
37/0.90mm	170A	9.7mm

PART NO.	DESCRIPTION	REEL LENGTH
0-981-00	Black	10m
0-981-05	Red	10m

95MM² CROSS SECTION


CONDUCTOR	CURRENT RATING	OUTSIDE Ø
684/0.40mm	500A	17.9mm

PART NO.	DESCRIPTION	REEL LENGTH
0-990-00	Black	10m
3-990-00	Black	50m
0-990-05	Red	10m

40MM² CROSS SECTION

CONDUCTOR	CURRENT RATING	OUTSIDE Ø
61/0.90mm	300A	11.8mm

PART NO.	DESCRIPTION	REEL LENGTH
0-982-00	Black	10m
3-982-00	Black	30m
0-982-05	Red	10m
3-982-05	Red	30m



DOUBLE INSULATED BATTERY / WELDING CABLE

- Double Ethylenepropylene rubber sheathed
- High temperature PETP tape separator
- Copper core
- BS638 part 4 1996

35MM² CROSS SECTION

CONDUCTOR	CURRENT RATING	OUTSIDE Ø
1107/0.20mm	290A	12.4mm

PART NO.	DESCRIPTION	REEL LENGTH
0-984-00	Black	10m
0-984-05	Orange	10m

70MM² CROSS SECTION

CONDUCTOR	CURRENT RATING	OUTSIDE Ø
2214/0.20mm	460A	16.3mm

PART NO.	DESCRIPTION	REEL LENGTH
0-985-00	Black	10m
0-985-05	Orange	10m

SPECIAL CABLE

SPEAKER CABLE - TWIN CORE PVC

2 X 0.38MM² CROSS SECTION

CONDUCTOR	CURRENT RATING	OUTSIDE Ø	REEL LENGTH
2x12/0.20mm	2A	3.6x1.7mm	100m

PART NO.	DESCRIPTION
0-954-17	Black and black/white



2 X 0.75MM² CROSS SECTION

CONDUCTOR	CURRENT RATING	OUTSIDE Ø	REEL LENGTH
2x24/0.20mm	6A	4.3x2.1mm	100m

PART NO.	DESCRIPTION
0-954-15	Black and black/red

FLEXIBLE MAINS CABLE - 3 CORE BS6500

3 X 1.0MM² CROSS SECTION, PVC INSULATED

CONDUCTOR	CURRENT RATING	OUTSIDE Ø	REEL LENGTH
32/0.20mm	10A	7.6mm	30m

PART NO.	DESCRIPTION
0-988-00	Blue, brown, green/yellow, sheathed white PVC



3 X 0.75MM² CROSS SECTION, TRS INSULATED

CONDUCTOR	CURRENT RATING	OUTSIDE Ø	REEL LENGTH
24/0.20mm	6A	6.2mm	30m

PART NO.	DESCRIPTION
0-986-00	Blue, brown, green/yellow, sheathed black rubber

✂ TRS = Tough Rubber Sheathed.

3 X 1.5MM² CROSS SECTION, PVC INSULATED

CONDUCTOR	CURRENT RATING	OUTSIDE Ø	REEL LENGTH
30/0.25mm	15A	8.9mm	30m

PART NO.	DESCRIPTION
0-989-00	Blue, brown, green/yellow, sheathed white PVC

3 X 1.0MM² CROSS SECTION, TRS INSULATED

CONDUCTOR	CURRENT RATING	OUTSIDE Ø	REEL LENGTH
32/0.20mm	10A	6.5mm	30m

PART NO.	DESCRIPTION
0-986-10	Blue, brown, green/yellow, sheathed black rubber

✂ TRS = Tough Rubber Sheathed.

3 X 1.5MM² CROSS SECTION, TRS INSULATED

CONDUCTOR	CURRENT RATING	OUTSIDE Ø	REEL LENGTH
30/0.25mm	15A	8.0mm	30m

PART NO.	DESCRIPTION
0-986-15	Blue, brown, green/yellow, sheathed black rubber

✂ TRS = Tough Rubber Sheathed.

IGNITION CABLE BS6862

SILICON SHEATHED, SILICON INSULATED SUPPRESSED CARBON

REEL LENGTH
30m

PART NO.	DESCRIPTION
0-961-57	Black, Ø 7mm
0-961-58	Black, Ø 8mm



1.5MM² PVC SHEATHED COPPER, PVC INSULATED

CONDUCTOR	OUTSIDE Ø	REEL LENGTH
21/0.30mm	7mm	30m

PART NO.	DESCRIPTION	PART NO.	DESCRIPTION
0-961-01	Black	0-961-05	Red

SIAMESE BATTERY CABLE

50M COIL SIAMESE BATTERY CABLE

- Highly flexible
- Double-insulated & Dual-core
- Class 6 copper conductors
- Figure of 8 configuration
- Suitable for indoor, outdoor, wet and dry locations
- Suitable for battery powered equipment and motorised vehicles
- Red and black insulation with transparent PVC outer-sheath
- Nominal overall dimensions (0-975-35) 9.1 x 20.0mm (0-975-50) 14.6 x 30.6mm

PART NO.	DESCRIPTION	QTY
0-975-35	190A 2 x 35mm ² 50m coil	1
0-975-50	230A 2 x 50mm ² 50m coil	1



 Build your own cable with alternative connectors, subject to MOQ.

POWER CABLE

170A POWER CABLE

- 12/24V
- 4m maximum working length
- Rated at 170A
- With 2 high current connectors
- 2 x 25mm² black cables

PART NO.	DESCRIPTION	QTY
4-204-06	1.5m cable	1
4-204-03	2m cable	1
4-204-07	2m cable (2 x 35mm ²)	1

PART NO.	DESCRIPTION	QTY
4-204-05	3m cable	1
4-204-09	4m cable	1



175A RETRACTABLE TWISTED PAIR POWER CABLE

- 12/24V
- 3m maximum working length
- 2 x 35mm² & 1 x red & 1 x black twisted pair power cable
- Rated at 175A

PART NO.	DESCRIPTION	QTY
0-733-35	With plain ends	1
0-733-36	With grey high current connectors	1
0-733-37	With red high current connectors	1



130A RETRACTABLE TWISTED PAIR POWER CABLE

- 12/24V
- 3m maximum working length
- 2 x 25mm² & 1 x red & 1 x black twisted pair power cable
- Rated at 130A

PART NO.	DESCRIPTION	QTY
0-733-25	With plain ends	1
0-733-26	With grey high current connectors	1
0-733-27	With red high current connectors	1



CABLE & WIRING ACCESSORIES CONNECTORS & TERMINALS HIGH CURRENT CONNECTORS

80A RETRACTABLE POWER CABLE

- 12/24V
- 3m maximum working length
- 2 x red 6mm² & 2 x 6mm², insulated black sheath cable
- Rated at 80A



PART NO.	DESCRIPTION	QTY
0-732-00	With red high current connectors	1
0-714-03	With plain ends	1

80A RETRACTABLE POWER CABLE

- 12/24V
- 3m maximum working length
- 4 x 6mm², 2 x red & 2 x black, insulated core
- Rated at 80A



PART NO.	DESCRIPTION	QTY
0-732-01	With grey high current connectors	1

CONNECTORS

HIGH CURRENT CONNECTORS

1 These connectors are “genderless” and are connected to each other by inverting one connector. The contacts are self-wiping.

2 POLE CONNECTORS

HIGH CURRENT CONNECTORS

Available in larger quantities.



	GREY		RED	
DESCRIPTION	QTY 1	QTY 100	QTY 1	QTY 100
Rated 50A	0-431-05	3-431-05	0-432-05	3-432-05
Rated 120A	0-431-20	-	0-432-20	-
Rated 175A	0-431-75	3-431-75	0-432-75	3-432-75
Rated 350A	0-431-35	3-431-35	0-432-35	-

AFTERMARKET HIGH CURRENT CONNECTORS



	GREY	RED
DESCRIPTION	QTY 100	QTY 100
Rated 50A 35mm ²	0-431-45	0-432-45
Rated 175A 50mm ²	0-431-55	0-432-55

CONNECTOR ACCESSORIES

POLYCARBONATE HANDLE

Polycarbonate handle.



PART NO.	DESCRIPTION	QTY
0-431-98	Red for 0-431-05, 0-431-20 & 0-431-20, 0-432-05	1
0-431-99	Grey for 0-431-75, 0-431-35 & 0-432-75, 0-432-35	1
0-432-99	Red for 0-431-75, 0-431-35	1

Item shown 0-431-99.

MOULDED PVC PROTECTIVE COVER

Moulded PVC protective cover for cable/connector.



PART NO.	DESCRIPTION	QTY
0-431-85	For 50A connector	1
0-431-87	For 175A connector	1
0-431-83	For 350A connector	1

Item shown 0-431-87.

CONNECTOR PROTECTIVE COVER

Connector Protective cover.



PART NO.	DESCRIPTION	QTY
0-431-95	For 50A connector	1
0-431-97	For 175A connector	1
0-431-93	For 350A connector	1

Item shown 0-431-97.

CABLE & WIRING ACCESSORIES CONNECTORS & TERMINALS HIGH CURRENT CONNECTORS

- 2 These connectors can be ganged together, are 'genderless' and are connected to each other by inverting one connector. The contacts are self-wiping

30A GENDERLESS CONNECTORS

2



Polycarbonate housing with silver plated solid copper terminals.

PART NO.	DESCRIPTION	QTY
0-014-01	Black	10
0-014-05	Red	10

75A GENDERLESS CONNECTORS

2



Polycarbonate housing with silver plated solid copper terminals.

PART NO.	DESCRIPTION	QTY
0-014-51	Black	2
0-014-55	Red	2

1 & 2 POLE CONNECTORS

75A CONNECTOR



PART NO.	DESCRIPTION	QTY
0-012-02	Double	1

BRASS BODY CONNECTOR

BRASS BODY CONNECTOR



With four grub screws and heat shrinkable, polyolefin sleeving

PART NO.	DESCRIPTION	QTY
0-466-00	For cable up to 25mm ²	10
0-466-01	For cable up to 40mm ²	10

HEAVY-DUTY BUTT SPICE CONNECTORS

TIN PLATED BUTT SPICE CONNECTORS

- Durite's Heavy-Duty Butt Splice Connectors are used to connect or splice two wires to lengthen, change or repair an electrical circuit
- Suitable for Automotive, Marine, Commercial and Industrial Applications
- Made from Tin Plated Copper

PART NO.	CABLE CSA	QTY
0-008-20	10mm ²	10
0-008-30	16mm ²	10
0-008-40	25mm ²	10
0-008-50	35mm ²	10
0-008-60	50mm ²	10
0-008-70	70mm ²	10
0-008-80	95mm ²	10



CSA= Cross Sectional Area.

LOOKING FOR?
Crimping tools see page 282.

TERMINALS

CABLE SOCKETS

TIN PLATED CABLE SOCKETS

- Tinned solid copper cable sockets
- Select cable diameter and stud size from the table below

 CSA= Cross Sectional Area.

	QTY	CABLE Ø	CABLE CSA	STUD SIZE 5MM	STUD SIZE 6MM	STUD SIZE 8MM	STUD SIZE 10MM	STUD SIZE 12MM	STUD SIZE 14MM	STUD SIZE 16MM
	10	4.40mm	10mm ²	0-008-21	0-008-22	0-008-23	0-008-24	0-008-25	-	-
	100	4.40mm	10mm ²	3-008-21	3-008-22	3-008-23	3-008-24	3-008-25	-	-
	10	5.60mm	16mm ²	-	0-008-32	0-008-33	0-008-34	0-008-35	-	-
	100	5.60mm	16mm ²	-	3-008-32	3-008-33	3-008-34	3-008-35	-	-
	10	7.00mm	25mm ²	-	0-008-42	0-008-43	0-008-44	0-008-45	-	-
	100	7.00mm	25mm ²	-	3-008-42	3-008-43	3-008-44	3-008-45	-	-
	10	8.20mm	35mm ²	-	0-008-52	0-008-53	0-008-54	0-008-55	-	-
	100	8.20mm	35mm ²	-	3-008-52	3-008-53	3-008-54	3-008-55	-	-
	10	9.50mm	50mm ²	-	0-008-62	0-008-63	0-008-64	0-008-65	0-008-66	-
	100	9.50mm	50mm ²	-	3-008-62	3-008-63	3-008-64	3-008-65	3-008-66	-
	10	11.50mm	70mm ²	-	-	0-008-73	0-008-74	0-008-75	0-008-76	0-008-77
	100	11.50mm	70mm ²	-	-	3-008-73	3-008-74	3-008-75	3-008-76	3-008-77
	10	13.50mm	95mm ²	-	-	-	0-008-84	0-008-85	0-008-86	0-008-87

BATTERY TERMINALS

DRILLED 7.5MM FOR 25MM² CABLE



- Hot stamped brass S.M.M.T battery terminals for longevity

PART NO.	DESCRIPTION	QTY
1-020-01	Positive	10
1-020-10	Positive	100
2-020-01	Negative	10
2-020-10	Negative	100

DRILLED 9.5MM FOR 40MM² CABLE



- Hot stamped brass S.M.M.T battery terminals for longevity

PART NO.	DESCRIPTION	QTY
1-155-01	Positive	10
5-155-01	Positive	1
2-155-10	Negative	100
2-155-01	Negative	10
6-155-01	Negative	1

DRILLED 11.1MM FOR 60MM² CABLE



- Hot stamped brass S.M.M.T battery terminals for longevity

PART NO.	DESCRIPTION	QTY
1-388-01	Positive	10
5-388-01	Positive	1
2-388-10	Negative	100
2-388-01	Negative	10
6-388-01	Negative	1

CABLE & WIRING ACCESSORIES CONNECTORS & TERMINALS BATTERY TERMINALS

DRILLED 14.3MM FOR XL CABLE



- Heavy-duty terminals

PART NO.	DESCRIPTION	QTY
1-224-01	Positive	10
2-224-01	Negative	10

DRILLED 8.9MM



- For 37/0.90mm 25mm² and 61/0.90mm 40mm² cable

PART NO.	DESCRIPTION	QTY
1-018-01	Positive	10
1-018-10	Positive	100
5-018-01	Positive	1
2-018-01	Negative	10
2-018-10	Negative	100
6-018-01	Negative	1

DRILLED 11.1MM



- For 61/1.13mm. 60mm² cable

PART NO.	DESCRIPTION	QTY
1-558-01	Positive	10
1-558-10	Positive	100
5-558-01	Positive	1
2-558-01	Negative	10
2-558-10	Negative	100
6-558-01	Negative	1

DRILLED 14.3MM FOR XL CABLE

- Heavy-duty terminals

PART NO.	DESCRIPTION	QTY
2-559-01	Negative	10
2-559-10	Negative	100
6-559-01	Negative	1

PART NO.	DESCRIPTION	QTY
1-559-01	Positive	10
1-559-10	Positive	100
5-559-01	Positive	1



STUD BATTERY TERMINALS

WITH 8MM STUD

- Hot stamped brass S.M.M.T battery terminals for longevity

PART NO.	DESCRIPTION	QTY
1-102-01	Positive	10
1-102-10	Positive	100
5-102-01	Positive	1
2-102-01	Negative	10
2-102-10	Negative	100
6-102-01	Negative	1



WITH 10MM STUD

- Hot stamped brass S.M.M.T battery terminals for longevity

PART NO.	DESCRIPTION	QTY
1-103-01	Positive	10
1-103-10	Positive	100
5-103-01	Positive	1
2-103-01	Negative	10
2-103-10	Negative	100
6-103-01	Negative	1



LIGHTING TERMINALS



- With vertical 3/8 UNC stud, washer and nut. Same size as AC Delco batteries

PART NO.	DESCRIPTION	QTY
1-100-04	Positive	10
5-100-04	Positive	1
2-100-04	Negative	10
6-100-04	Negative	1

- With vertical 5/16 Whitworth stud, spring washer and nut

PART NO.	DESCRIPTION	QTY
1-100-01	Positive	10
1-100-10	Positive	100
5-100-01	Positive	1
2-100-01	Negative	10
2-100-10	Negative	100
6-100-01	Negative	1

OTHER BATTERY TERMINALS

SMALL JAPANESE TERMINALS



- Drilled 9.4mm for 266/0.30mm 20mm² and 37/0.90mm 25mm² cable

PART NO.	DESCRIPTION	QTY
1-017-01	Positive	10
5-017-01	Positive	1
2-017-01	Negative	10
6-017-01	Negative	1

✂ Non S.M.M.T battery terminals.

QUICK RELEASE TERMINALS



- A practical solution to ordinary battery terminals, by means of a quick release clamp mechanism to easily attach or detach the terminals from a vehicle battery
- These quick release battery terminals are for any vehicle battery cable 20/25mm² to 50mm².
- Made of natural brass
- Pack of 2 (1 positive and 1 negative) or sold individually

PART NO.	DESCRIPTION	QTY
0-023-00	Positive/Negative Pack	2
1-023-00	Positive only - Red	1
2-023-00	Negative only - Blue	1



CABLE & WIRING ACCESSORIES CONNECTORS & TERMINALS BATTERY TERMINALS

FORD TYPE TERMINAL



- Battery terminals for Ford type terminal conversion
- 1 positive and 1 negative

PART NO.	DESCRIPTION	QTY
0-022-00	Ford type	pair

DISCONNECT TYPE TERMINAL



- Green with plastic tightening wheel without fuse holder
- Ideal battery isolator or anti-theft device

PART NO.	DESCRIPTION	QTY
2-021-00	Disconnect type	1



- With bridging fuse holder for radio memory, alarm and clock feeds, and Ford type battery terminal conversion

PART NO.	DESCRIPTION	QTY
2-021-50	Disconnect type	1

BATTERY TERMINAL ACCESSORIES

MOULDED NATURAL RUBBER BATTERY TERMINAL COVERS

- To fit all side entry battery terminals

PART NO.	SIZE	QTY
1-558-99	Red	10
5-558-99	Red	1
2-558-99	Black	10
6-558-99	Black	1

- To fit all standard lighting terminals

PART NO.	SIZE	QTY
1-100-99	Red	10
5-100-99	Red	1
2-100-99	Black	10
6-100-99	Black	1




ANTI-CORROSIVE COMPOUND

- An anti-corrosive compound which kills corrosion and inhibits deterioration of terminals and metal parts on or near lead acid batteries

PART NO.	DESCRIPTION	QTY
0-139-99	Anti-corrode	1




WE'RE ON SOCIAL MEDIA FOLLOW US @DURITELIMITED

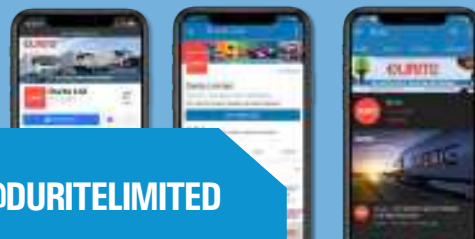


PRE-INSULATED TERMINALS

Terminals are solid copper or solid brass and have copper insulation support sleeve.

RING TERMINALS

COPPER

Suitable for cables
0.5mm² - 1.5mm²
9 - 21/0.30mm



PART NO.	SIZE	QTY
0-001-01	3.7mm ring	50
2-001-01	3.7mm ring	100
3-001-01	3.7mm ring	1000
0-001-02	5.3mm ring	50
2-001-02	5.3mm ring	100
3-001-02	5.3mm ring	1000
0-001-20	6.4mm ring	50
2-001-20	6.4mm ring	100
3-001-20	6.4mm ring	1000
0-001-48	8.4mm ring	50
2-001-48	8.4mm ring	100
3-001-48	8.4mm ring	1000

Suitable for cables
1.5mm² - 2.5mm²
21 - 35/0.30mm



PART NO.	SIZE	QTY
0-001-05	3.7mm ring	50
2-001-05	3.7mm ring	100
3-001-05	3.7mm ring	1000
0-001-06	5.3mm ring	50
2-001-06	5.3mm ring	100
3-001-06	5.3mm ring	1000
0-001-21	6.4mm ring	50
2-001-21	6.4mm ring	100
3-001-21	6.4mm ring	1000
0-001-45	8.4mm ring	50
2-001-45	8.4mm ring	100
3-001-45	8.4mm ring	1000

Suitable for cables
3.0mm² - 6.0mm²
44 - 84/0.30mm




PART NO.	SIZE	QTY
0-001-23	5.3mm ring	50
2-001-23	5.3mm ring	100
3-001-23	5.3mm ring	1000
0-001-22	6.4mm ring	50
2-001-22	6.4mm ring	100
3-001-22	6.4mm ring	1000
0-001-12	8.4mm ring	50
2-001-12	8.4mm ring	100
3-001-12	8.4mm ring	1000
0-001-25	10.5mm ring	50
2-001-25	10.5mm ring	100
3-001-25	10.5mm ring	1000
0-001-39	13mm ring	50
2-001-39	13mm ring	100
3-001-39	13mm ring	1000

RING TERMINALS HEATSHRINK

COPPER

Suitable for cables
0.5mm² - 1.5mm²
9 - 21/0.30mm



PART NO.	SIZE	QTY
0-001-65	4.3mm ring	25
2-001-65	4.3mm ring	100
0-001-71	6.4mm ring	25
2-001-71	6.4mm ring	100

Suitable for cables
1.5mm² - 2.5mm²
21 - 35/0.30mm




PART NO.	SIZE	QTY
0-001-66	4.3mm ring	25
2-001-66	4.3mm ring	100
0-001-72	6.4mm ring	25
2-001-72	6.4mm ring	100

Suitable for cables
4.0mm² - 6.0mm²
56-84/0.30mm



PART NO.	SIZE	QTY
0-001-67	4.3mm ring	25
2-001-67	4.3mm ring	100
0-001-73	6.4mm ring	25
2-001-73	6.4mm ring	100



CABLE & WIRING ACCESSORIES CONNECTORS & TERMINALS PRE-INSULATED TERMINALS

FORK TERMINALS

COPPER

Suitable for cables
0.5mm² - 1.5mm²
9 - 21/0.30mm



PART NO.	SIZE	QTY
0-001-03	3.7mm ring	50
2-001-03	3.7mm ring	100
3-001-03	3.7mm ring	1000
0-001-04	5.3mm ring	50
2-001-04	5.3mm ring	100
3-001-04	5.3mm ring	1000

Suitable for cables
1.5mm² - 2.5mm²
21 - 35/0.30mm



PART NO.	SIZE	QTY
0-001-07	3.7mm ring	50
2-001-07	3.7mm ring	100
3-001-07	3.7mm ring	1000
0-001-08	5.3mm ring	50
2-001-08	5.3mm ring	100
3-001-08	5.3mm ring	1000

LOOKING FOR?
Crimping tools
See page 284 & 285.

BLADE TERMINALS

BRASS

Suitable for cables
0.5mm² - 1.5mm²
9 - 21/0.30mm



PART NO.	SIZE	QTY
0-001-26	6.3mm blade	50
2-001-26	6.3mm blade	100
3-001-26	6.3mm blade	1000

Suitable for cables
1.5mm² - 2.5mm²
21 - 35/0.30mm



PART NO.	SIZE	QTY
0-001-13	6.3mm blade	50
2-001-13	6.3mm blade	100
3-001-13	6.3mm blade	1000

Suitable for cables
3.0mm² - 6.0mm²
44 - 84/0.30mm



PART NO.	SIZE	QTY
0-001-28	6.3mm blade	50
2-001-28	6.3mm blade	100
3-001-28	6.3mm blade	1000

MALE SPADE TERMINALS HEATSHRINK

BRASS

Suitable for cables
0.5mm² - 1.5mm²
9 - 21/0.30mm




PART NO.	SIZE	QTY
0-001-62	6.3mm male spade	25
2-001-62	6.3mm male spade	100

Suitable for cables
1.5mm² - 2.5mm²
21 - 35/0.30mm



PART NO.	SIZE	QTY
0-001-63	6.3mm male spade	25
2-001-63	6.3mm male spade	100

Suitable for cables
4.0mm² - 6.0mm²
56-84/0.30mm



PART NO.	SIZE	QTY
0-001-64	6.3mm male spade	25
2-001-64	6.3mm male spade	100

CABLE & WIRING ACCESSORIES CONNECTORS & TERMINALS PRE-INSULATED TERMINALS

PUSH ON TERMINALS

BRASS

Suitable for cables
0.5mm² - 1.5mm²
9 - 21/0.30mm



PART NO.	SIZE	QTY
0-001-30	2.8mm push on	50
2-001-30	2.8mm push on	100
3-001-30	2.8mm push on	1000
0-001-34	4.8mm push on	50
2-001-34	4.8mm push on	100
3-001-34	4.8mm push on	1000
0-001-09	6.3mm push on	50
2-001-09	6.3mm push on	100
3-001-09	6.3mm push on	1000

Suitable for cables
1.5mm² - 2.5mm²
21 - 35/0.30mm



PART NO.	SIZE	QTY
0-001-29	4.8mm push on	50
2-001-29	4.8mm push on	100
3-001-29	4.8mm push on	1000
0-001-17	6.3mm push on	50
2-001-17	6.3mm push on	100
3-001-17	6.3mm push on	1000
0-001-40	8.0mm push on	50
2-001-40	8.0mm push on	100
3-001-40	8.0mm push on	1000

Suitable for cables
3.0mm² - 6.0mm²
44 - 84/0.30mm



PART NO.	SIZE	QTY
0-001-18	6.3mm push on	50
2-001-18	6.3mm push on	100
3-001-18	6.3mm push on	1000
0-001-19	9.5mm push on	50
2-001-19	9.5mm push on	100
3-001-19	9.5mm push on	1000

FEMALE SPADE TERMINAL HEATSHRINK

BRASS

Suitable for cables
0.5mm² - 1.5mm²
9 - 21/0.30mm



PART NO.	SIZE	QTY
0-001-59	6.3mm female spade	25
2-001-59	6.3mm female spade	100

Suitable for cables
1.5mm² - 2.5mm²
21 - 35/0.30mm



PART NO.	SIZE	QTY
0-001-60	6.3mm female spade	25
2-001-60	6.3mm female spade	100

Suitable for cables
3.0mm² - 6.0mm²
56-84/0.30mm



PART NO.	SIZE	QTY
0-001-61	6.3mm female spade	25
2-001-61	6.3mm female spade	100

INSULATED PUSH ON TERMINALS

BRASS

Suitable for cables
0.5mm² - 1.5mm²
9 - 21/0.30mm



PART NO.	SIZE	QTY
0-001-52	4.8mm push on	50
2-001-52	4.8mm push on	100
3-001-52	4.8mm push on	1000
0-001-41	6.3mm push on	50
2-001-41	6.3mm push on	100
3-001-41	6.3mm push on	1000

Suitable for cables
1.5mm² - 2.5mm²
21 - 35/0.30mm



PART NO.	SIZE	QTY
0-001-27	6.3mm push on	50
2-001-27	6.3mm push on	100
3-001-27	6.3mm push on	1000

Suitable for cables
3.0mm² - 6.0mm²
44 - 84/0.30mm



PART NO.	SIZE	QTY
0-001-46	6.3mm push on	50
2-001-46	6.3mm push on	100
3-001-46	6.3mm push on	1000
0-001-47	9.5mm push on	50
2-001-47	9.5mm push on	100
3-001-47	9.5mm push on	1000

CABLE & WIRING ACCESSORIES CONNECTORS & TERMINALS PRE-INSULATED TERMINALS

PIGGY BACK TERMINALS

BRASS

Suitable for cables
0.5mm² - 1.5mm²
9 - 21/0.30mm



PART NO.	SIZE	QTY
0-001-33	6.3mm piggy back	50
2-001-33	6.3mm piggy back	100
3-001-33	6.3mm piggy back	1000

Suitable for cables
1.5mm² - 2.5mm²
21 - 35/0.30mm



PART NO.	SIZE	QTY
0-001-15	6.3mm piggy back	50
2-001-15	6.3mm piggy back	100
3-001-15	6.3mm piggy back	1000

NIPPLE TERMINALS

BRASS

Suitable for cables
0.5mm² - 1.5mm²
9 - 21/0.30mm



PART NO.	SIZE	QTY
0-001-36	4.0mm nipple	50
2-001-36	4.0mm nipple	100
3-001-36	4.0mm nipple	1000

Suitable for cables
1.5mm² - 2.5mm²
21 - 35/0.30mm



PART NO.	SIZE	QTY
0-001-32	5.0mm nipple	50
2-001-32	5.0mm nipple	100
3-001-32	5.0mm nipple	1000
0-001-14	4.7mm nipple	50

↗ Special size for Ford applications.

Suitable for cables
3.0mm² - 6.0mm²
44 - 84/0.30mm



PART NO.	SIZE	QTY
0-001-37	5.0mm nipple	50
2-001-37	5.0mm nipple	100
3-001-37	5.0mm nipple	1000

NIPPLE TERMINALS HEATSHRINK

BRASS

Suitable for cables
0.5mm² - 1.5mm²
9 - 21/0.30mm



PART NO.	SIZE	QTY
0-001-56	4.0mm nipple	25
2-001-56	4.0mm nipple	100

Suitable for cables
1.5mm² - 2.5mm²
21 - 35/0.30mm



PART NO.	SIZE	QTY
0-001-57	5.0mm nipple	25
2-001-57	5.0mm nipple	100

Suitable for cables
4.0mm² - 6.0mm²
56-84/0.30mm



PART NO.	SIZE	QTY
0-001-58	5.0mm nipple	25
2-001-58	5.0mm nipple	100

CABLE & WIRING ACCESSORIES CONNECTORS & TERMINALS PRE-INSULATED TERMINALS

PIN TERMINALS

COPPER

Suitable for cables
0.5mm² - 1.5mm²
9 - 21/0.30mm



PART NO.	SIZE	QTY
0-001-42	1.9mm pin	50
2-001-42	1.9mm pin	100
3-001-42	1.9mm pin	1000

Suitable for cables
1.5mm² - 2.5mm²
21 - 35/0.30mm



PART NO.	SIZE	QTY
0-001-43	1.9mm pin	50
2-001-43	1.9mm pin	100
3-001-43	1.9mm pin	1000

Suitable for cables
3.0mm² - 6.0mm²
44 - 84/0.30mm



PART NO.	SIZE	QTY
0-001-44	2.9mm pin	50
2-001-44	2.9mm pin	100
3-001-44	2.9mm pin	1000

NIPPLE RECEPTACLES

BRASS

Suitable for cables
0.5mm² - 1.5mm²
9 - 21/0.30mm



PART NO.	SIZE	QTY
0-001-35	4.0mm receptacle	50
2-001-35	4.0mm receptacle	100
3-001-35	4.0mm receptacle	1000

Suitable for cables
1.5mm² - 2.5mm²
21 - 35/0.30mm



PART NO.	SIZE	QTY
0-001-31	5.0mm receptacle	50
2-001-31	5.0mm receptacle	100
3-001-31	5.0mm receptacle	1000

Suitable for cables
3.0mm² - 6.0mm²
44 - 84/0.30mm



PART NO.	SIZE	QTY
0-001-38	5.0mm receptacle	50
2-001-38	5.0mm receptacle	100
3-001-38	5.0mm receptacle	1000

NIPPLE RECEPTACLES HEATSHRINK

BRASS

Suitable for cables
0.5mm² - 1.5mm²
9 - 21/0.30mm



PART NO.	SIZE	QTY
0-001-53	4.0mm receptacle	25
2-001-53	4.0mm receptacle	100

Suitable for cables
1.5mm² - 2.5mm²
21 - 35/0.30mm



PART NO.	SIZE	QTY
0-001-54	5.0mm receptacle	25
2-001-54	5.0mm receptacle	100

Suitable for cables
4.0mm² - 6.0mm²
56-84/0.30mm



PART NO.	SIZE	QTY
0-001-55	5.0mm receptacle	25
2-001-55	5.0mm receptacle	100

CABLE & WIRING ACCESSORIES CONNECTORS & TERMINALS PRE-INSULATED TERMINALS

BUTT CONNECTORS

COPPER

Suitable for cables
0.5mm² - 1.5mm²
9 - 21/0.30mm



PART NO.	QTY
0-001-10	50
2-001-10	100
3-001-10	1000

Suitable for cables
1.5mm² - 2.5mm²
21 - 35/0.30mm



PART NO.	QTY
0-001-11	50
2-001-11	100
3-001-11	1000

Suitable for cables
3.0mm² - 6.0mm²
44 - 84/0.30mm



PART NO.	QTY
0-001-16	50
2-001-16	100
3-001-16	1000

BUTT CONNECTORS: ADHESIVE HEAT-SHRINK

COPPER

Suitable for cables
0.5mm² - 1.5mm²
9 - 21/0.30mm



PART NO.	QTY
0-001-49	25
2-001-49	100
3-001-49	1000

Suitable for cables
1.5mm² - 2.5mm²
21 - 35/0.30mm



PART NO.	QTY
0-001-50	25
2-001-50	100
3-001-50	1000

Suitable for cables
3.0mm² - 6.0mm²
44 - 84/0.30mm



PART NO.	QTY
0-001-51	25
2-001-51	100
3-001-51	1000

BUTT CONNECTORS: SOLDER ADHESIVE LINED HEATSHRINK

Suitable for cables
0.2mm² - 0.75mm²



PART NO.	QTY
0-001-90	10

Suitable for cables
0.6mm² - 2.0mm²



PART NO.	QTY
0-001-91	10

Suitable for cables
1.8mm² - 2.5mm²



PART NO.	QTY
0-001-92	10

Suitable for cables
2.4mm² - 4.5mm²



PART NO.	QTY
0-001-93	10

UNINSULATED TERMINALS

NIPPLE TERMINALS

✂ Use crimp tool 0-004-50.



- Crimp nipple for 0.65mm² cable

PART NO.	DESCRIPTION	QTY
0-005-39	0.65mm ²	100



- Crimp nipple for 1.00mm² cable

PART NO.	DESCRIPTION	QTY
0-005-40	1.00mm ²	100



LOOKING FOR?

Crimp tool see page 285.



- Crimp nipple for 2.00mm² cable

PART NO.	DESCRIPTION	QTY
0-005-41	2.00mm ²	100



- Solder nipple for 3.00mm² cable

PART NO.	DESCRIPTION	QTY
0-004-70	3.00mm ²	100

CABLE & WIRING ACCESSORIES CONNECTORS & TERMINALS UNINSULATED TERMINALS

NIPPLE TERMINAL CONNECTORS


✂ Use assembly tool 0-004-00 see page 285.

- Single connector



PART NO.	DESCRIPTION	QTY
0-004-71	Single connector	50

- Double connector



PART NO.	DESCRIPTION	QTY
0-004-72	Double connector	50

ROUND TERMINALS

FEMALE RECEPTACLE

- 2.00mm bulkhead socket for 1.00 - 2.50mm² cable



PART NO.	DESCRIPTION	QTY
0-005-15	2.00mm	50

- 3.00mm bulkhead socket for 1.00 - 2.50mm² cable



PART NO.	DESCRIPTION	QTY
0-005-14	3.00mm	50

- 4.70mm terminal with sleeve for Ford coil



PART NO.	DESCRIPTION	QTY
0-004-74	4.70mm	50

MALE PIN

- 2.00mm bulkhead pin for 1.00 - 2.50mm² cable



PART NO.	DESCRIPTION	QTY
0-005-11	2.00mm	50

- 3.00mm bulkhead pin for 1.00 - 2.50mm² cable



PART NO.	DESCRIPTION	QTY
0-005-10	3.00mm	50

- 4.70mm pin for Ford coil Ø 4.7mm



PART NO.	DESCRIPTION	QTY
0-005-48	1.0 - 2.50mm ² cable	50

BLADE TERMINALS

2.8MM RECEPTACLE

- 2.80mm push-on for 0.50 - 1.00mm² cable

✂ With locking tag.

PART NO.	QTY
0-005-16	50



4.8MM RECEPTACLE

- 4.80mm push-on for 1.00 - 2.50mm² cable

✂ With locking tag.

PART NO.	QTY
0-005-18	50
3-005-18	1000



CABLE & WIRING ACCESSORIES CONNECTORS & TERMINALS UNINSULATED TERMINALS

6.3MM BLADE

- For 0.65 - 1.00mm² cable

PART NO.	QTY
0-011-21	50
3-011-21	1000

✂ With locking tag.



- 5.00mm hole

PART NO.	QTY
0-005-28	50



- For 1.00 - 2.50mm² cable

PART NO.	QTY
0-011-22	50
3-011-22	1000

✂ With locking tag.



- Double blade 3.70mm hole

PART NO.	QTY
0-005-34	50



- For 0.50 - 2.00mm² cable

PART NO.	QTY
0-005-27	50
3-005-27	1000



- Blade x 6, 4.1mm holes

PART NO.	QTY
0-005-35	50



6.3MM RECEPTACLE

- Push-on for 0.65 - 1.00mm² cable

PART NO.	QTY
0-011-23	50
3-011-23	1000

✂ With locking tag.



- Push-on with high current shoe for 2.50 - 4.00mm² cable

PART NO.	QTY
0-005-29	50



- Push-on for 1.00 - 2.50mm² cable

PART NO.	QTY
0-011-24	50
3-011-24	1000

✂ With locking tag.



- Push-on 1.00 - 2.50mm² cable

PART NO.	QTY
0-005-30	50



- Push-on for 1.00 - 2.50mm² cable

PART NO.	QTY
0-005-20	50
3-005-20	1000



6.3MM ADAPTORS

- Piggy-back push-on for 2.00 - 2.50mm² cable

PART NO.	QTY
0-005-12	50



- Blade adaptor

PART NO.	QTY
0-005-32	50



CABLE & WIRING ACCESSORIES CONNECTORS & TERMINALS UNINSULATED TERMINALS

8.0MM RECEPTACLE



- Push-on for 1.50 - 2.50mm² cable

✂ With locking tag.

PART NO.	QTY
0-005-13	50

9.5MM RECEPTACLE



- Push-on for 4.00 - 6.00mm² cable

PART NO.	QTY
0-005-22	50



- Push-on for 6.00 - 10.00mm² cable

PART NO.	QTY
0-005-24	50

✂ With locking tag.

BLADE TERMINAL INSULATORS

4.8MM INSULATOR



- Clear insulator
- 4.8mm

PART NO.	QTY
0-005-19	50

9.5MM INSULATOR



- Clear insulator
- 9.5mm

PART NO.	QTY
0-005-23	25

6.3MM INSULATORS



- Clear insulator
- 6.3mm

PART NO.	QTY
0-005-21	50



- Clear flag insulator
- 6.3mm

PART NO.	QTY
0-005-31	50



- White post-fit insulator
- 6.3mm

PART NO.	QTY
0-005-26	50

SOLDER TERMINALS

UNINSULATED RING TERMINALS



PART NO.	TYPE	CABLE CSA	QTY
0-010-47	3.8mm Ring	6mm ²	50



PART NO.	TYPE	CABLE CSA	QTY
0-010-41	5.0mm Ring	3mm ²	50



PART NO.	TYPE	CABLE CSA	QTY
0-010-51	5.3mm Ring	4.5mm ²	50

CABLE & WIRING ACCESSORIES CONNECTORS & TERMINALS UNINSULATED TERMINALS

UNINSULATED RING TERMINALS



PART NO.	TYPE	CABLE CSA	QTY
0-010-54	9.5mm Ring	10mm ²	50



PART NO.	TYPE	CABLE CSA	QTY
0-010-55	8.0mm Ring	10mm ²	50

CRIMP RING TERMINALS

RING

QTY	HOLE	CONDUCTOR 10mm ²	CONDUCTOR 16mm ²	CONDUCTOR 25mm ²	CONDUCTOR 50mm ²
10	6mm	0-010-61	0-010-64	0-010-67	-
100	6mm	3-010-61	3-010-64	3-010-67	-
25	7.9mm	-	-	0-003-52	-
10	8mm	0-010-62	0-010-65	0-010-68	-
100	8mm	3-010-62	3-010-65	3-010-68	-
10	10mm	0-010-63	0-010-66	0-010-69	-
25	10mm	0-003-57	-	-	-
100	10mm	3-010-63	3-010-66	3-010-69	-
10	10.1mm	-	-	-	0-003-61



FLAG

MOD 5940.99.400.8491.



PART NO.	HOLE	CONDUCTOR Ø	QTY
0-002-62	9.5mm	7.9mm	25

INSULATING BOOT



CABLE ENTRY	TERMINAL Ø	
6mm	11mm	
PART NO.	DESCRIPTION	QTY
0-003-40	Black	25



CABLE ENTRY	TERMINAL Ø	
8mm	15mm	
PART NO.	DESCRIPTION	QTY
0-003-50	Black	25
3-003-50	Black	100



CABLE ENTRY	TERMINAL Ø	
8x14mm	21mm	
PART NO.	DESCRIPTION	QTY
0-003-60	Black	10

CABLE ENTRY	TERMINAL Ø	
8mm	17mm	
PART NO.	DESCRIPTION	QTY
0-003-70	Black	10
0-003-75	Red	10



CABLE ENTRY	TERMINAL Ø	
13mm	17mm	
PART NO.	DESCRIPTION	QTY
0-003-80	Black	10
0-003-85	Red	10



CABLE & WIRING ACCESSORIES CONNECTORS & TERMINALS UNINSULATED TERMINALS

SCOTCHLOK™ CONNECTORS



- For 0.65 - 1.5mm² cables

PART NO.	QTY
0-560-04	50



- For 3.00 - 4.50mm²,
0.65 - 2.00mm²

PART NO.	QTY
0-005-61	25



- For 1.00 - 2.00mm² cables

PART NO.	QTY
0-560-02	50

AFTERMARKET CONNECTORS



- For 0.5 - 1.0mm² cables

PART NO.	QTY
0-560-11	50



- For 4.0 to 6.0mm² cables

PART NO.	QTY
0-560-13	25



- For 0.75 to 2.5mm² cables

PART NO.	QTY
0-560-12	50

IGNITION TERMINALS

TERMINALS



PART NO.	USAGE	QTY
0-006-03	Distributor cap	25



PART NO.	USAGE	QTY
0-006-13	Distributor cap	25

✂ Use insulator 0-009-10.



PART NO.	USAGE	QTY
0-006-10	Spark plug	25

✂ Use insulator 0-009-03.

INSULATORS



PART NO.	TYPE	USAGE	QTY
0-009-11	Insulator	Distributor cap	25



✂ For 0-006-10.

PART NO.	TYPE	USAGE	QTY
0-009-03	Insulator	Spark plug	25



✂ For 0-006-13.

PART NO.	TYPE	USAGE	QTY
0-009-10	Insulator	Distributor cap	25

MULTIPLE CONNECTORS

ECONOSEAL CONNECTORS

✂ Use crimping tool 0-703-51 for these connectors.

WATERPROOF MALE CONNECTOR

- Supplied with terminals and seal

PART NO.	TYPE	QTY
0-012-42	2-way	1
0-012-43	3-way	1



WATERPROOF FEMALE CONNECTOR

- Supplied with terminals and seal

PART NO.	TYPE	QTY
0-012-52	2-way	1
0-012-53	3-way	1



JUNIOR TIMER CONNECTORS

MALE CONNECTOR

- Supplied with terminals

✂ Use crimping tool 0-703-53.

PART NO.	TYPE	QTY
0-012-61	2-way	1



FEMALE CONNECTOR

- Supplied with cable boot and terminals

✂ Use crimping tool 0-703-53.

PART NO.	TYPE	QTY
0-012-71	2-way	1



✂ Use crimping tool 0-703-52 for these connectors.

MALE CONNECTOR

- Supplied with cable seals and terminals



🔍 **LOOKING FOR?**
Crimping tools
See page 284 & 285.

PART NO.	TYPE	QTY
0-012-62	2-way	1

FEMALE CONNECTOR

- Supplied with cable seals and terminals



PART NO.	TYPE	QTY
0-012-72	2-way	1
0-012-73	3-way	1
0-012-74	4-way	1

JUNIOR POWER TIMER TERMINALS



PART NO.	TYPE	QTY
0-012-25	0.5 - 1.0mm ² male	50
0-012-26	1.00 - 2.5mm ² male	50



PART NO.	TYPE	QTY
0-012-27	0.5 - 1.0mm ² female	50
0-012-28	1.00 - 2.5mm ² female	50

SUPERSEAL CONNECTORS & TERMINALS

✂ Use crimping tool 0-703-51 for these connectors.

1.5MM MALE BLADE HOUSING

1 of = Complete kit
100 of = Housings only



PART NO.	TYPE	QTY
0-011-51	1-way	1
3-011-51	1-way	100
0-011-52	2-way	1
3-011-52	2-way	100
0-011-53	3-way	1
3-011-53	3-way	100
0-011-54	4-way	1
3-011-54	4-way	100
0-011-55	5-way	1
3-011-55	5-way	100
0-011-56	6-way	1
3-011-56	6-way	100

1.5MM FEMALE BLADE HOUSING

1 of = Complete kit
100 of = Housings only



PART NO.	TYPE	QTY
0-011-61	1-way	1
3-011-61	1-way	100
0-011-62	2-way	1
3-011-62	2-way	100
0-011-63	3-way	1
3-011-63	3-way	100
0-011-64	4-way	1
3-011-64	4-way	100
0-011-65	5-way	1
3-011-65	5-way	100
0-011-66	6-way	1
3-011-66	6-way	100

SUPERSEAL TERMINALS



PART NO.	TYPE	DESCRIPTION	QTY
0-011-50	1.5mm Male	Terminal only	10
3-011-50	1.5mm Male	Terminal & seal	1000



PART NO.	TYPE	DESCRIPTION	QTY
0-011-60	1.5mm Female	Terminal only	10
3-011-60	1.5mm Female	Terminal & seal	1000

DELPHI CONNECTORS

2.8MM MALE BLADE HOUSING

- Supplied with terminals and seal



PART NO.	TYPE	QTY
0-011-71	1-way	1
0-011-72	2-way	1
0-011-73	3-way	1

2.8MM FEMALE RECEPTACLE HOUSING

- Supplied with terminals and seal



PART NO.	TYPE	QTY
0-011-81	1-way	1
0-011-82	2-way	1
0-011-83	3-way	1

CABLE & WIRING ACCESSORIES CONNECTORS & TERMINALS MULTIPLE CONNECTORS

SCHLEMMER CONNECTORS

BLACK OR BLACK/GREY NYLON

- Supplied with terminals and seals for use on 10NW tubing

PART NO.	DESCRIPTION	TYPE	QTY
0-326-51	M24 DIN 90°	2-way	1
0-326-52	M27 DIN 90°	2-way	1
0-326-53	Inline DIN	4-way	1
0-326-54	Inline DIN 90°	4-way	1



PART NO.	DESCRIPTION	TYPE	QTY
0-326-55	Inline DIN male	5-way	1
0-326-56	Inline DIN female	5-way	1
0-326-57	Inline DIN female	7-way	1
✂ Fits some Volvo and Mercedes lamps.			
0-326-58	Inline DIN female	8-way	1
✂ Fits some MAN lamps.			



LOOKING FOR?
Tubing. See page 164.

'PACKARD' TIMER CONNECTORS

FEMALE CONNECTOR

- Supplied with cable seals and terminals

PART NO.	TYPE	QTY
0-012-92	2-way	1



PART NO.	TYPE	QTY
0-012-93	3-way	1



CAN'T FIND WHAT YOU ARE LOOKING FOR?

Contact us today for your bespoke requirements
Sales@durite.co.uk or visit www.durite.co.uk

CABLE & WIRING ACCESSORIES CONNECTORS & TERMINALS MULTIPLE CONNECTORS

DEUTSCH DT SERIES CONNECTORS

Get reliability and performance when you need it most with Deutsch environmentally sealed connectors from Durite designed for cable to cable applications.

- Male or Female 2, 3, 4, 6, 8 or 12 cavity arrangements
- Thermoplastic housing withstands conditions of extreme temperature and moisture
- Accommodates wire sizes up to 2.00mm²
- Kit supplied with terminals and seals for 0.5-1.00mm² cables
- Wedgelocks and housings available in packs of 100 & terminals in packs of 4 or 250
- Separate terminals also available for 0.5-1.00mm² cables and 1.00-2.00mm² cables

MALE DEUTSCH CONNECTORS

2-WAY	PART NO.	DESCRIPTION	QTY
	0-011-32	Kit	1
	3-011-32	Housing	100
	3-111-32	Wedgelock	100
3-WAY	0-011-33	Kit	1
	3-011-33	Housing	100
	3-111-33	Wedgelock	100
4-WAY	0-011-34	Kit	1
	3-011-34	Housing	100
	3-111-34	Wedgelock	100
6-WAY	0-011-36	Kit	1
	3-011-36	Housing	100
	3-111-36	Wedgelock	100
8-WAY	0-011-38	Kit	1
	3-011-38	Housing	100
	3-111-38	Wedgelock	100
12-WAY	0-011-39	Kit	1
	3-011-39	Housing	100
	3-111-39	Wedgelock	100

FEMALE DEUTSCH CONNECTORS

2-WAY	PART NO.	DESCRIPTION	QTY
	0-011-42	Kit	1
	3-011-42	Housing	100
	3-111-42	Wedgelock	100
3-WAY	0-011-43	Kit	1
	3-011-43	Housing	100
	3-111-43	Wedgelock	100
4-WAY	0-011-44	Kit	1
	3-011-44	Housing	100
	3-111-44	Wedgelock	100
6-WAY	0-011-46	Kit	1
	3-011-46	Housing	100
	3-111-46	Wedgelock	100
8-WAY	0-011-48	Kit	1
	3-011-48	Housing	100
	3-111-48	Wedgelock	100
12-WAY	0-011-49	Kit	1
	3-011-49	Housing	100
	3-111-49	Wedgelock	100

TERMINALS FOR DEUTSCH CONNECTORS



PART NO.	DESCRIPTION	QTY
0-011-95	1.0-2.0mm ²	4
3-011-95	1.0-2.0mm ²	250
0-011-97	0.5-1.0mm ²	4
3-011-97	0.5-1.0mm ²	250



PART NO.	DESCRIPTION	QTY
0-011-96	1.0-2.0mm ²	4
3-011-96	1.0-2.0mm ²	250
0-011-98	0.5-1.0mm ²	4
3-011-98	0.5-1.0mm ²	250


✂ Use crimping tool 0-703-20 for these connectors.

CABLE & WIRING ACCESSORIES CONNECTORS & TERMINALS MULTIPLE CONNECTORS

BLADE CONNECTORS


6.3MM MALE HOUSING

- These connectors are not supplied with blade terminals, which must be ordered separately

PART NO.	TYPE	QTY	
0-011-01	1-way	5	
0-011-02	2-way	5	
3-011-02	2-way	1000	
0-011-03	2-way	5	
3-011-03	2-way	1000	
0-011-04	3-way	5	
3-011-04	3-way	1000	
0-011-05	4-way	5	
3-011-05	4-way	1000	
0-011-06	6-way	5	
3-011-06	6-way	1000	
0-011-07	8-way	5	
0-011-08	11-way	5	

6.3MM FEMALE HOUSING

- These connectors are not supplied with push-on terminals, which must be ordered separately

PART NO.	TYPE	QTY	
0-011-10	1-way	5	
0-011-12	2-way	5	
3-011-12	2-way	1000	
0-011-13	2-way	5	
3-011-13	2-way	1000	
0-011-14	3-way	5	
3-011-14	3-way	1000	
0-011-15	4-way	5	
3-011-15	4-way	1000	
0-011-16	6-way	5	
3-011-16	6-way	1000	
0-011-17	8-way	5	
0-011-18	11-way	5	

TERMINALS WITH LOCKING TAG FOR 6.3MM BLADE CONNECTORS

✂ These terminals are suitable for the connectors in the relevant column above.

PART NO.	TYPE	SUITABLE FOR CABLE	QTY
0-011-21	Blade	0.65mm ² - 1.0mm ²	50
3-011-21	Blade	0.65mm ² - 1.0mm ²	1000



PART NO.	TYPE	SUITABLE FOR CABLE	QTY
0-011-22	Blade	1.0mm ² - 2.5mm ²	50
3-011-22	Blade	1.0mm ² - 2.5mm ²	1000



PART NO.	TYPE	SUITABLE FOR CABLE	QTY
0-011-23	Push on	0.65mm ² - 1.0mm ²	50
3-011-23	Push on	0.65mm ² - 1.0mm ²	1000



PART NO.	TYPE	SUITABLE FOR CABLE	QTY
0-011-24	Push on	1.0mm ² - 2.5mm ²	50
3-011-24	Push on	1.0mm ² - 2.5mm ²	1000



CABLE & WIRING ACCESSORIES CONNECTORS & TERMINALS MULTIPLE CONNECTORS

'MATE N LOCK' CONNECTORS & PINS

2.0MM MALE HOUSING

- These connectors are not supplied with terminals, which must be ordered separately



PART NO.	TYPE	QTY
0-013-01	1-way	5
0-013-02	2-way	5
0-013-03	3-way	5
0-013-04	6-way	5
0-013-05	9-way	5
0-013-06	12-way	5
0-013-07	15-way	5
3-013-07	15-way	100

2.0MM FEMALE HOUSING

- These connectors are not supplied with terminals, which must be ordered separately



PART NO.	TYPE	QTY
0-013-11	1-way	5
0-013-12	2-way	5
0-013-13	3-way	5
0-013-14	6-way	5
0-013-15	9-way	5
0-013-16	12-way	5
0-013-17	15-way	5
3-013-17	15-way	100

PINS SUITABLE FOR CABLES 0.5MM² - 2.5MM² WITH LOCKING TAG

✂ Pins and receptacles can be used in either male or female housing.



PART NO.	TYPE	QTY
0-013-21	2.0mm Pin	50
3-013-21	2.0mm Pin	1000



PART NO.	TYPE	QTY
0-013-23	2.0mm receptacle	50
3-013-23	2.0mm receptacle	1000

PE/PVC CONNECTORS

PE CABLE CONNECTORS, STRIP OF 12

- With steel screws and brass insert



PART NO.	DESCRIPTION	CURRENT RATING	QTY
0-598-00	for 6mm ² cable	5A	10
0-596-00	for 10mm ² cable	10A	10
0-599-00	for 12mm ² cable	15A	10
0-688-00	for 16mm ² cable	30A	10
0-689-00	for 25mm ² cable	60A	10

PVC CABLE CONNECTORS, 15A STRIP

- For 6.3mm brass push-on terminals



PART NO.	DESCRIPTION	QTY
0-675-00	15A strip	10

TERMINAL BOXES

TERMINAL BLOCKS

- Black moulded insulated housing for cables up to 25mm²
- Contains 2 x M8 studs



PART NO.	QTY
0-466-50	1

- 7 way, 2 x Ø 5.4mm, 5 x Ø 4mm
- Single fixing hole, 3.2mm diameter



PART NO.	QTY
0-005-38	1

- Phenolic base, 25A, 2 x 4 way, 6.3mm common plated brass blade terminals
- L 12 x W 50 x H 22mm



PART NO.	QTY
0-005-52	1

- Phenolic base, 25A, 3 x 6 way, 6.3mm common plated brass blade terminals
- L 28 x W 50 x H 22mm



PART NO.	QTY
0-005-53	1

BUS BARS

- Bus bar, tin plated copper bar with 2 stainless steel 3/16" UNF studs
- ABS insulating base with recessed 5mm mounting holes



PART NO.	DESCRIPTION	CURRENT RATING	QTY
0-005-70	5 screws	100A	1
0-005-75	10 screws	150A	1

- Bus bar, tin plated copper bar with 4 stainless steel studs
- ABS insulating base with recessed 5mm mounting holes



PART NO.	DESCRIPTION	CURRENT RATING	QTY
0-005-71	3/16" UNF studs	100A	1
0-005-76	1/4" UNF studs	150A	1

HEAVY-DUTY ENCLOSED BUS BARS

- Heavy-duty modular design bus bar for up to 48V

PART NO.	DESCRIPTION	CURRENT RATING	QTY
0-005-57	4 terminal studs	300A	1
0-005-58	6 terminal studs	300A	1
0-005-59	12 terminal studs	100A	1
0-005-60	4 insulated terminal studs	200A	1



BUS BAR COVERS



✂ 0-005-97.

✂ 0-005-96.

PART NO.	DESCRIPTION	QTY
0-005-97	Fits 0-005-70/71	1
0-005-96	Fits 0-005-75/76	1

JUNCTION BOXES

- Universal junction box, moulded in grey plastic with removable lid and 'O' ring seal
- Protected to IP56



PART NO.	DESCRIPTION	QTY
0-697-10	100 x 100 x 50mm, accepts glands up to 17NW	1
0-697-15	150 x 110 x 70mm, accepts all glands	1

- Junction, 8-way, black phenolic body and lid, with waterproof cable glands at each end
- Lid has waterproof gasket all round, and is secured by a single knurled screw
- L 147 x W 73 x H 43mm



PART NO.	QTY
0-697-00	1

- 8-way junction box
- 50V DC, 15A max load per circuit, max total current 120A if all 8 connectors are used
- 50A for any single way where no other terminals are used




PART NO.	QTY
0-697-20	1

TUBING & SLEEVING

CONVOLUTED TUBING

- Protects cables and looms against external elements

✓ Match NW Tubing to NW Connector.



BLACK NYLON HEAVY-DUTY CONVOLUTED UN-SPLIT TUBING



PART NO.	NOMINAL WIDTH	INSIDE Ø	OUTSIDE Ø	COIL
0-330-07	7.5	6.7mm	10.0mm	50m
0-330-10	10	9.9mm	13.0mm	50m
0-330-13	13	12.7mm	15.8mm	50m
0-330-17	17	16.6mm	21.2mm	50m
0-330-22	22	21.3mm	25.4mm	50m

BLACK NYLON HEAVY-DUTY CONVOLUTED SPLIT TUBING



PART NO.	NOMINAL WIDTH	INSIDE Ø	OUTSIDE Ø	COIL
0-331-07	7.5	6.7mm	10.0mm	50m
0-331-10	10	9.9mm	13.0mm	50m
0-331-13	13	12.7mm	15.8mm	50m
0-331-17	17	16.6mm	21.2mm	50m
0-331-22	22	21.3mm	25.4mm	50m
0-331-26	26	25.8mm	31.2mm	25m
0-331-37	37	36mm	42.4mm	25m
0-331-50	50	47.7mm	54mm	25m

BLACK POLYPROPYLENE DEEP SECTION CONVOLUTED SPLIT TUBING



PART NO.	NOMINAL WIDTH	INSIDE Ø	OUTSIDE Ø	COIL
0-328-04	4.5	5.0mm	7.1mm	100m
0-328-54	4.5 (un-split)	5.0mm	7.1mm	100m
0-328-07	7.5	6.9mm	9.9mm	50m
0-328-10	10	8.5mm	12.9mm	50m
0-328-11	11	10.1mm	17.7mm	50m

PART NO.	NOMINAL WIDTH	INSIDE Ø	OUTSIDE Ø	COIL
0-328-13	13	11.1mm	15.7mm	50m
0-328-17	17	15.0mm	21.2mm	50m
0-328-22	22	19.1mm	25.7mm	50m
0-328-26	26	26.3mm	31.4mm	25m
0-328-29	29	29.3mm	33.9mm	25m

BLACK POLYAMIDE 6 CONVOLUTED UN-SPLIT TUBING



Extra flexible

NOMINAL WIDTH	INSIDE Ø	OUTSIDE Ø	COIL LENGTH	
			25M	100M
7.5	6.5mm	10.0mm	0-330-38	3-330-38
8.5	8.7mm	11.5mm	-	3-330-40
10	10.1mm	13.0mm	0-330-42	3-330-42
13	11.8mm	16.0mm	0-330-46	3-330-46
17	16.9mm	21.2mm	0-330-51	3-330-51
22	20.1mm	24.5mm	0-330-55	-
22	21.3mm	25.6mm	-	3-330-55
23	23.1mm	28.5mm	0-330-58	3-330-58

BLACK POLYAMIDE 6 CONVOLUTED SPLIT TUBING



Extra flexible

NOMINAL WIDTH	INSIDE Ø	OUTSIDE Ø	COIL LENGTH	
			25M	100M
4.5	4.4mm	7.2mm	-	3-331-36
7.5	6.5mm	10.0mm	0-331-38	3-331-38
8.5	8.7mm	11.5mm	-	3-331-40
10	10.1mm	13.0mm	0-331-42	3-331-42
13	11.8mm	16.0mm	0-331-46	3-331-46
17	16.9mm	21.2mm	0-331-51	3-331-51
22	20.1mm	24.5mm	0-331-55	-
22	21.3mm	25.6mm	-	3-331-55
23	23.1mm	28.5mm	0-331-58	3-331-58

CONVOLUTED TUBING ACCESSORIES


CABLE FEEDING TOOL








PART NO.	DESCRIPTION	QTY
0-331-98	For split tubing up to 10NW	1
0-331-99	For split tubing from 13NW	1

BLACK NYLON UNSEALED 'Y' PIECE CONNECTORS

PART NO.	NOMINAL WIDTH			TYPE	H	L	QTY
	A	B	C				
0-327-10	7.5	7.5	7.5	A	40.1	46.9	1
0-327-11	10	10	10	D	43.0	54.4	1
0-327-12	13	7.5	10	C	39.5	47.3	1
0-327-13	13	10	10	C	45.4	59.9	1
0-327-14	13	10	13	C	45.6	59.9	1
0-327-15	13	13	13	C	46.6	59.9	1
0-327-16	17	13	10	C	46.9	59.9	1
0-327-17	17	13	17	B	58.4	78.8	1
0-327-19	22	13	17	B	55.1	60.3	1
0-327-20	26	22	22	C	64.7	69.4	1

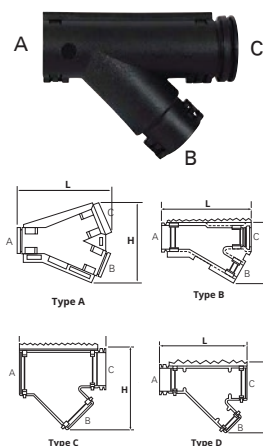


BLACK NYLON UNSEALED 'T' PIECE CONNECTORS



PART NO.	NOMINAL WIDTH			TYPE	H	L	QTY
	A	B	C				
0-327-30	7.5	7.5	7.5	A	24.7	33.4	1
0-327-40	10	7.5	7.5	D	28.7	39.7	1
0-327-41	10	7.5	10	B	28.7	39.4	1
0-327-42	10	10	10	B	28.8	42.4	1
0-327-50	13	7.5	13	B	31.7	40.1	1
0-327-51	13	10	10	D	31.9	43.6	1
0-327-52	13	10	13	B	31.6	43.6	1
0-327-53	13	13	13	C	31.9	46.6	1
0-327-60	17	7.5	13	B	31.6	41.0	1
0-327-61	17	7.5	17	B	31.9	40.8	1
0-327-62	17	10	13	B	36.9	43.6	1
0-327-63	17	10	17	B	37.0	43.8	1
0-327-64	17	13	13	B	36.9	46.0	1
0-327-65	17	13	17	B	36.3	50.1	1
0-327-66	17	22	17	B	39.3	59.9	1
0-327-67	17	17	17	A	35.0	45.0	1


PART NO.	NOMINAL WIDTH			TYPE	H	L	QTY
	A	B	C				
0-327-70	22	7.5	22	B	41.4	39.5	1
0-327-71	22	10	10	B	47.0	66.3	1
0-327-72	22	10	22	B	66.4	47.0	1
0-327-73	22	13	17	B	41.4	46.7	1
0-327-74	22	13	22	B	41.4	46.4	1
0-327-75	22	17	13	B	41.4	46.7	1
0-327-76	22	22	22	B	42.4	56.2	1

BLACK NYLON UNSEALED INTERFACES FOR AMP CONNECTORS

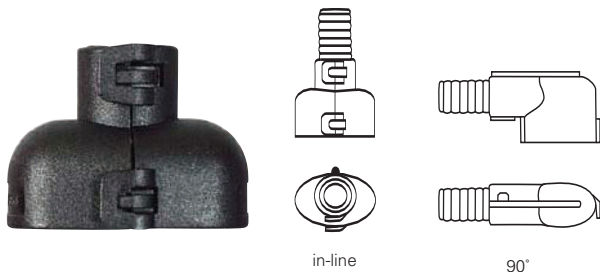

PART NO.	NOMINAL WIDTH	TYPE	CONNECTOR	QTY
0-326-11	7.5	in-line	Superseal 2-way	1
0-326-12	10	in-line	Superseal 2-way	1
0-326-13	10	in-line	Superseal 3-way	1
0-326-14	10	90°	Superseal 3-way	1
0-326-15	10	in-line	Superseal 4-way	1
0-326-16	10	in-line	Superseal 5-way	1
0-326-17	10	in-line	Superseal 6-way	1


BLACK POLYCARBONATE SEALED 'T' FITTING

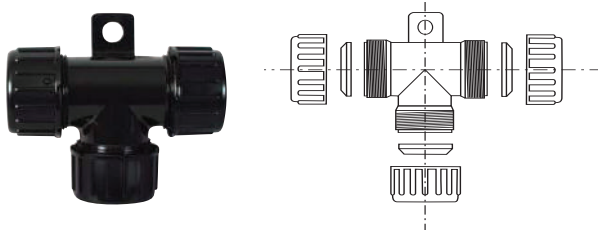

- Comes with nylon cap nuts and sealing rings to provide protection to IP67, use with un-split tubing

PART NO.	NOMINAL WIDTH	QTY
0-330-57	7.5	1
0-330-60	10	1
0-330-67	17	1
0-330-72	22	1


BLACK NYLON SEALED CONNECTION GLAND

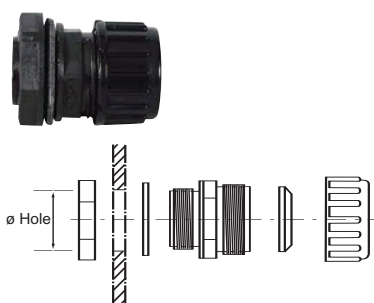

- Comes with sealing rings to provide protection to IP67, use with un-split tubing

PART NO.	NOMINAL WIDTH	HOLE Ø	QTY
0-330-77	7.5	16mm	1
0-330-80	10	16mm	1
0-330-83	13	20mm	1
0-330-87	17	20mm	1
0-330-92	22	25mm	1

BLACK NYLON UNSEALED 90° ELBOW CONNECTORS



PART NO.	NOMINAL WIDTH	H	L	QTY
0-327-01	10	28	35.2	1
0-327-02	13	30.5	37.5	1
0-327-03	17	38.3	43.7	1
0-327-04	22	44.3	49.1	1

STRENGTHENING COLLARS




- Black nylon
- For strengthening open tube ends

PART NO.	NOMINAL WIDTH	QTY
0-326-30	4.5	10
0-326-31	7.5	10
0-326-32	10	10
0-326-33	13	10
0-326-34	17	10
0-326-35	22	10

CABLE & WIRING ACCESSORIES CABLE MANAGEMENT CONVOLUTED TUBING ACCESSORIES


CLAMPING CHASSIS CLIPS



- Black nylon
- For all types of tubing

PART NO.	NOMINAL WIDTH	QTY
0-326-40	7.5	25
0-326-41	10	25
0-326-42	13	25
0-326-43	17	25
0-326-44	22	25

CONVOLUTED TUBE REDUCERS



- Black nylon

PART NO.	NOMINAL WIDTH	QTY
0-326-01	10 - 7.5	10
0-326-02	13 - 7.5	10
0-326-03	13 - 10	10
0-326-04	17 - 13	10
0-326-05	22 - 13	10
0-326-06	22 - 17	10
0-326-07	26 - 22	10

CONDUIT END CAPS

6 outlets



single outlet



5 outlets



- Black PVC
- For convoluted tubing

PART NO.	DESCRIPTION	QTY
0-326-90	NW10 with 5 cable outlets	10
0-326-91	NW13 with 6 cable outlets	10
0-326-92	NW17 with single outlet	10
0-326-93	NW22 with single outlet	10

CABLE SLEEVING

HEAT SHRINK POLYOLEFIN TUBING



- Shrink ratio 2:1. Minimum shrink temperature 70°C
- Operating temperature of -55°C to 125°C

INSIDE Ø	WALL THICKNESS	COIL	RED	BLACK	BLACK	BLACK
			PART NO.	PART NO.	BOX	PART NO.
2.4mm	0.20mm	5m	0-333-52	0-333-02	11m	2-333-02
3.2mm	0.25mm	5m	0-333-53	0-333-03	11m	2-333-03
4.8mm	0.25mm	5m	0-333-54	0-333-04	10m	2-333-04
6.4mm	0.28mm	5m	0-333-56	0-333-06	9m	2-333-06
9.5mm	0.30mm	5m	0-333-59	0-333-09	7m	2-333-09
12.7mm	0.30mm	5m	0-333-62	0-333-12	6m	2-333-12
19.0mm	0.40mm	1m	0-333-69	0-333-19	5m	2-333-19
25.4mm	0.45mm	1m	0-333-75	0-333-25	3.5m	2-333-25
38.0mm	0.50mm	1m	0-333-88	0-333-38	-	-

HEAT SHRINK ADHESIVE LINED POLYOLEFIN TUBING



- Shrink ratio 3:1. Minimum shrink temperature 80°C
- Operating temperature -45°C to 110°C

PART NO.	INSIDE Ø	WALL THICKNESS	COIL	PART NO.	INSIDE Ø	WALL THICKNESS	COIL
0-329-03	3.0mm	0.35mm	4x30cm	0-329-09	9.0mm	0.50mm	4x30cm
0-329-04	4.5mm	0.35mm	4x30cm	0-329-12	12.7mm	0.60mm	4x30cm
0-329-06	6.0mm	0.40mm	4x30cm	0-329-19	19.1mm	0.70mm	4x30cm

POLYETHYLENE SPIRAL BINDING



- Ideal for electrical harnesses and wiring looms
- Protects cables against chafing

PART NO.		OUTSIDE Ø	INSIDE Ø	WALL THICKNESS	COIL
BLACK	WHITE				
0-332-55	0-332-65	6.0mm	4.0 - 50mm	0.5mm	25m
0-332-56	0-332-66	8.0mm	6.0 - 60mm	0.5mm	25m
0-332-57	0-332-67	12mm	9.0 - 65mm	0.9mm	25m
0-332-58	0-332-68	15mm	12 - 70mm	1.0mm	25m



LOOKING FOR ASSORTED HEATSHRINK KITS? SEE PAGE 195.



BLACK P.V.C. SLEEVING

- For use on electrical harnesses



PART NO.	INSIDE Ø	WALL THICKNESS	COIL
0-332-03	3mm	0.5mm	25m
0-332-04	4mm	0.5mm	25m
0-332-05	5mm	0.5mm	25m
0-332-06	6mm	0.5mm	25m
0-332-07	7mm	0.5mm	25m
0-332-09	9mm	0.5mm	25m
0-332-11	11mm	0.5mm	25m
0-332-14	14mm	0.5mm	25m
0-332-16	16mm	0.5mm	25m

ALUMINIUM SLEEVING

- Woven fibreglass sleeving
- Protects cables and looms against heat up to 815°C and abrasion



PART NO.	INSIDE Ø	COIL
0-334-63	12.7mm	1.5m
0-334-75	25.0mm	1.5m

BLACK EXPANDABLE BRAIDED SLEEVING



- Flame retardant PET monofilament yarn
- Operating temperature -40°C to 125°C

PART NO.	ID	MIN ID Ø	MAX ID Ø	COIL
0-325-07	6.4mm	3.2mm	9.5mm	10m
0-325-10	9.5mm	4.8mm	15.9mm	10m
0-325-13	12.7mm	6.4mm	19.0mm	10m
0-325-19	19.1mm	12.7mm	31.7mm	10m
0-325-32	31.8mm	19.0mm	38.1mm	10m
0-325-38	38.1mm	25.4mm	57.1mm	10m

CABLE & WIRING ACCESSORIES CABLE MANAGEMENT GROMMETS

ALUMINIUM COVERED SPLIT TUBING

- Aluminium and fibreglass covered nylon convoluted split tubing
- Protects cables against heat up to 260°C

PART NO.	INSIDE Ø	OUTSIDE Ø	COIL	QTY
0-331-63	14.5mm	22.2mm	1.5m	1
0-331-69	19.4mm	26.7mm	1.5m	1




GROMMETS

BLACK PVC WIRING GROMMETS

PART NO.	A	B	C	D	E	QTY
0-447-36	6.4	1.6	4	3.8	8.5	50
0-447-39	9.3	1.6	7.7	6	13.4	50
0-447-42	12.3	1.6	9.5	6.4	16.2	50
0-447-46	15.8	1.6	12.20	5.9	19	50
0-447-50	20	1.6	15.8	6.2	23	50
0-447-55	25	1.6	19.5	7.3	29.2	25
0-447-62	31.70	1.6	24	8.0	38.1	10
0-447-68	37.4	1.6	31.5	9.5	46.0	10
0-447-70	50.5	1.6	44.5	11.21	60.3	10


✂ Sizes in mm.

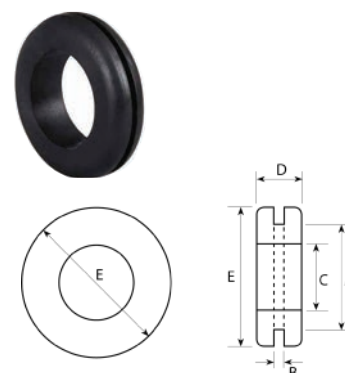

BLACK PVC BLANKING GROMMETS

PART NO.	A	B	C	D	QTY
0-452-36	6.4	1.6	3.8	8.5	50
0-452-39	9.3	1.6	6	13.4	50
0-452-42	12.3	1.6	6.4	16.2	50
0-452-46	15.8	1.6	5.9	19.0	50
0-452-50	20.2	1.6	6.2	24.2	50
0-452-55	25.0	1.6	7.3	29.2	25
0-452-62	31.7	1.6	7.2	38.1	10
0-452-68	37.7	1.6	8.3	44.4	10
0-452-70	50.5	1.6	7.3	57.2	10


✂ Sizes in mm.

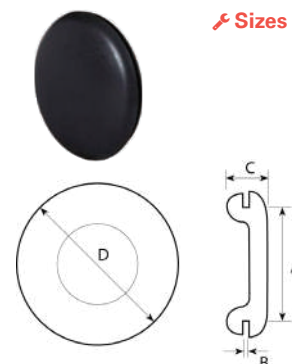

FIXINGS & ACCESSORIES

CABLE TIES

STANDARD NYLON 6.6 CABLE TIES

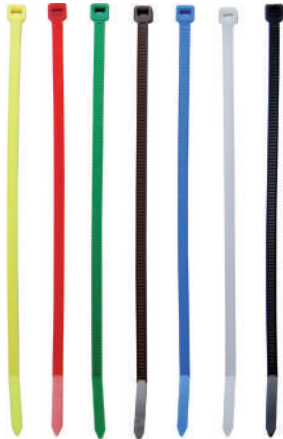

✂ Save when you order 10 or more packs.

WHITE	BLACK	SIZE	QTY
0-002-30	0-002-52	100 x 2.5mm	100
0-002-31	0-002-50	120 x 4.8mm	100
-	0-002-40	140 x 3.6mm	100
0-002-32	0-002-53	160 x 2.5mm	100
-	0-002-59	200 x 7.6mm	100
0-002-33	0-002-54	200 x 2.5mm	100
0-002-28	0-002-46	200 x 4.8mm	100
0-002-34	0-002-65	250 x 4.8mm	100
0-002-35	0-002-55	295 x 3.6mm	100
0-002-29	0-002-47	300 x 4.8mm	100
-	0-002-48	300 x 7.6mm	100
-	0-002-56	370 x 4.8mm	100
-	0-002-49	370 x 7.6mm	100
0-002-37	0-002-57	430 x 9.0mm	100
0-002-38	0-002-68	550 x 9.0mm	100
-	0-002-09	730 x 12.7mm	100
-	0-002-69	762 x 9.0mm	100
-	0-002-58	200 x 3.6mm	100

PART NO.	COLOUR	SIZE	QTY
0-002-12	Blue	200 x 4.8mm	100
0-002-13	Brown	200 x 4.8mm	100
0-002-14	Green	200 x 4.8mm	100
0-002-15	Red	200 x 4.8mm	100
0-002-18	Yellow	200 x 4.8mm	100
0-002-20	Silver	300 x 4.8mm	100
0-002-21	Silver	370 x 4.8mm	100

MOULDED NYLON FIXING BASES FOR CABLE TIES



✂ Save when you order 10 or more packs.

- Adhesive backed
- For cable ties up to 5mm
- Base 28 x 28mm
- Screw fixing

PART NO.	DESCRIPTION	QTY
0-002-41	Black	25
0-002-51	White	25



- For cable ties up to 4.8mm
- Base 19 x 9.5mm
- Screw fixing

PART NO.	DESCRIPTION	QTY
0-002-42	Black	25



- For cable ties up to 9mm
- Base 23 x 15mm
- Screw fixing

PART NO.	DESCRIPTION	QTY
0-002-44	Black	25
0-002-45	White	25

CABLE CLIPS

CHASSIS CLIPS

- Zinc plated spring steel



✂ 0-004-75



✂ 0-004-76



✂ 0-004-77



✂ 0-004-79



✂ 0-004-80

PART NO.	DESCRIPTION	QTY
0-004-75	56 x 12.7mm	25
0-004-76	66 x 12.7mm	25
0-004-77	41 x 12.7mm	25
0-004-79	40 x 12.7mm	25
0-004-80	30 x 12.7mm	25

CABLE & WIRING ACCESSORIES CABLE MANAGEMENT CABLE TIES & ACCESSORIES

ADHESIVE BACKED NYLON CABLE CLIPS

✂ Save when you order 10 or more packs.

PART NO.	FOR CABLE UP TO	SIZE	QTY
0-004-83	3 - 5mm Ø	16 x 16mm	25
0-004-82	3 - 7mm Ø	25 x 25mm	25
0-004-81	8 - 12mm Ø	25 x 25mm	25



"P" CLIPS

- Fixing 6.6mm, zinc plated steel and TPE liner



- Nylon, adjustable with 5mm fixing hole



- Solid brass



PART NO.	FOR CABLE UP TO	QTY
0-002-81	Ø 5mm	25
0-002-82	Ø 8mm	25
0-002-83	Ø 10mm	25
0-002-84	Ø 13mm	25
0-002-85	Ø 16mm	25
0-002-86	Ø 21mm	25
0-002-87	Ø 25mm	25
0-002-88	Ø 32mm	25

WHITE	BLACK	FOR CABLE UP TO	QTY
0-002-71	0-002-91	For Ø 4 - 6mm	25
0-002-72	0-002-92	For Ø 6 - 9mm	25
0-002-73	0-002-93	For Ø 9 - 14mm	25
0-002-74	0-002-94	For Ø 14 - 22mm	25
0-002-75	0-002-95	For Ø 22 - 30mm	25

PART NO.	FOR CABLE UP TO	FIXING HOLE	QTY
0-002-66	Ø 5mm	3.2mm	25
0-002-67	Ø 10mm	5.0mm	25
0-002-63	Ø 15mm	5.0mm	25
0-002-64	Ø 20mm	6.4mm	25
0-003-59	Ø 25mm	5.0mm	25

HARNESS ACCESSORIES & TAPE

PVC TAPE

COLOURED PVC ADHESIVE TAPE

- 19mm x 5m roll



	PART NO.	
	QTY 1	QTY 12
BLACK	5-557-01	0-557-01
BLUE	5-557-02	0-557-02
GREEN	5-557-04	0-557-04
GREY	5-557-09	0-557-09

	PART NO.	
	QTY 1	QTY 12
RED	5-557-05	0-557-05
WHITE	5-557-07	0-557-07
YELLOW	5-557-08	0-557-08
GREEN/YELLOW	5-557-48	0-557-48

DESCRIPTION	PART NO.	QTY
Assorted	0-557-00	12

✂ 0-557-00 Two each of black, blue, green, red, white and yellow.

CABLE & WIRING ACCESSORIES CABLE MANAGEMENT HARNESS ACCESSORIES & TAPE

BLACK PVC ADHESIVE TAPE



- 19mm x 20m roll

PART NO.	QTY
0-615-00	10
5-615-00	1

BLACK PVC NON-ADHESIVE LOOM TAPE



- 19mm x 40m roll

PART NO.	QTY
0-592-00	10
5-592-00	1

SELF AMALGAMATING TAPE

SELF AMALGAMATING (PIB) TAPE



- Self amalgamating tape, 25mm x 3m roll
- Black Polyisobutylene

PART NO.	QTY
0-557-50	1

SELF AMALGAMATING/ HIGH VOLTAGE TAPE



- Self amalgamating tape, 19mm x 10m roll
- Black

PART NO.	QTY
0-557-52	1

HAZARD WARNING TAPE

ADHESIVE HAZARD WARNING TAPE



- 50mm x 33m roll

PART NO.	DESCRIPTION	QTY
0-557-75	Red/white	1
0-557-78	Black/yellow	1

ALUMINIUM TAPE

ALUMINIUM FOIL TAPE



- Aluminium foil tape

PART NO.	DESCRIPTION	QTY
0-557-37	48mm x 50m tape	1

ALUMINIUM COVERED TAPE & MAT



- Woven fibreglass adhesive tape or mat
- Protects cables, looms and pipes against abrasion and heat up to 815°C

PART NO.	DESCRIPTION	QTY
0-557-38	37mm x 4.5m tape	1
0-557-39	300 x 600mm mat	1

WOVEN EGYPTIAN COTTON TAPE



- Field coil tape with red centre guideline

DESCRIPTION	QTY 1	QTY 5
13mm x 50m roll	5-527-00	0-527-00
16mm x 50m roll	5-528-00	0-528-00

CABLE & WIRING ACCESSORIES CABLE MANAGEMENT HARNESS ACCESSORIES & TAPE

OTHER TAPE

FLEECE TAPE

- Black fleece tape
- For wiring looms



PART NO.	DESCRIPTION	QTY
0-527-50	19mm x 20m roll	1

DOUBLE SIDED FOAM TAPE

- Adhesive both sides



PART NO.	DESCRIPTION	QTY
0-557-80	12mm x 10m roll	1
0-557-81	19mm x 10m roll	1
0-557-82	25mm x 10m roll	1
0-557-83	50mm x 10m roll	1

DUCT TAPE

- 48mm x 50m
- General purpose
- Strong adhesive



PART NO.	DESCRIPTION	QTY
0-557-21	Black	1
0-557-29	Silver	1

MASKING TAPE

- Strong edges
- Easy tear



PART NO.	DESCRIPTION	QTY
0-557-60	25mm x 50m	1
0-557-61	50mm x 50m	1



Durite supplies a wide range of battery and automotive cables, ISO6722 and BS6862/BS6500 approved.

Select from over 350 different cables, single core and multicore, 0.65mm² to 70mm². Reels are available in 10m, 30m, 50m and 100m.

POWER TRANSFER

CHARGING CLIPS

5A CLIPS



- 5A alligator clip, nickel plated steel
- 44mm long
- Jaw opening 13mm
- Ministry Ref. 5940.99.940.0856

PART NO.	QTY
0-140-05	50
0-261-00	10



- Insulating sleeves, red and black, moulded in soft PVC, for use on part 0-140-05 and 0-261-00 clips

PART NO.	QTY
0-140-01	5 pairs

25A CLIPS



- 25A crocodile clip, plated steel
- 76mm long
- Jaw opening 32mm
- Ministry Ref. 5940.99.940.0859

PART NO.	QTY
0-187-25	50
0-263-00	10



- One pair of 25A crocodile clips with one black and one red insulation sleeve
- 6.3mm male blade terminals

PART NO.	QTY
0-187-00	1 pair



- 25A crocodile clip, plated steel
- 76mm long
- Jaw opening 32mm
- 6.3mm male blade terminal

PART NO.	QTY
0-187-27	50
0-263-27	10



- Insulation sleeves moulded in soft PVC
- For use only on Part 0-187-27 and 0-263-27

PART NO.	COLOUR	QTY
0-187-01	Black	10
0-187-05	Red	10

40A CLIP



- 40A crocodile clip, plated steel
- 82mm long
- Jaw opening 19mm
- Fitted with red and black plastic handles

PART NO.	QTY
0-186-00	1 pair

50A CLIP



- 50A crocodile clip, plated steel
- 102mm long
- Jaw opening 50mm

PART NO.	QTY
0-187-50	25
0-263-50	10

100A CLIP



- 100A crocodile clip, plated steel
- 183mm long
- Jaw opening 40mm
- Supplied with terminal, nut, bolt and red and black plastic covers

PART NO.	COLOUR	QTY
0-153-00	2 red, 2 black	2 pairs
0-153-01	Black only	1 clip
0-153-05	Red only	1 clip

200A CLIP



- 200A crocodile clip, solid copper
- 183mm long
- Jaw opening 40mm
- Supplied with terminal, nut, bolt and red and black plastic handles

PART NO.	COLOUR	QTY
0-153-50	2 red, 2 black	2 pairs
0-153-51	Black only	1 clip
0-153-55	Red only	1 clip

BOOSTER CABLES

135A LEADS



- Set of two slave leads, 266/0.30mm, 20mm², 135A PVC insulated cable
- Fitted with plated steel crocodile clips

PART NO.	LENGTH	QTY
0-204-00	2.5m long	1 set
0-205-00	5m long	1 set

170A LEADS



- Set of two heavy-duty slave leads, 322/0.30mm, 25mm², 170A PVC insulated cable
- Fitted with plated steel crocodile clips

PART NO.	LENGTH	QTY
0-204-10	2.5m long	1 set
0-205-10	5m long	1 set

170A WITH CONNECTORS



- Set of two heavy-duty slave leads, 322/0.30mm, 25mm², 170A PVC insulated cable with plated steel crocodile clips
- Fitted with 0-431-75 connectors at 1 metre in line

PART NO.	LENGTH	QTY
0-205-11	5m long	1 set

300A INSULATED LEADS



- Set of two extra heavy-duty slave leads, 539/0.30mm, 40mm², 300A PVC insulated cable
- Fitted with plated steel crocodile clips with copper braid bonded jaws

PART NO.	LENGTH	QTY
0-204-20	2.5m long	1 set
0-205-20	5m long	1 set

UNIVERSAL BATTERY LEADS



- Universal battery jumper
- Silicon insulated 10A cable with 25A clips

PART NO.	LENGTH	QTY
0-154-00	600mm long	10

DURITE



FOR A BOOSTER PACK FOR 12V OR 24V VEHICLES. SEE PAGES 270 & 271.



BATTERY LEADS

BATTERY TO BATTERY LEADS

25MM² CROSS SECTION



CONDUCTOR	CURRENT RATING	QTY
37/0.90mm	170A	5

AS ILLUSTRATED

PART NO.	LENGTH
0-622-06	150mm
0-622-09	225mm
0-622-12	300mm

40MM² CROSS SECTION



CONDUCTOR	CURRENT RATING	QTY
61/0.90mm	300A	5

AS ILLUSTRATED

PART NO.	LENGTH
0-621-06	150mm
0-621-09	225mm
0-621-12	300mm

REVERSE OF ILLUSTRATED

PART NO.	LENGTH
0-621-59	225mm
0-621-62	300mm

60MM² CROSS SECTION



CONDUCTOR	CURRENT RATING	QTY
61/1.13mm	415A	5

AS ILLUSTRATED

PART NO.	LENGTH
0-623-06	150mm
0-623-09	225mm
0-623-12	300mm

REVERSE OF ILLUSTRATED

PART NO.	LENGTH
0-623-59	225mm
0-623-62	300mm

UNIVERSAL BATTERY LEADS

20MM² CROSS SECTION



CONDUCTOR	CURRENT RATING	TERMINAL	QTY
266/0.30mm	135A	8mm	5

PART NO.	LENGTH	PART NO.	LENGTH
0-574-12	300mm	0-574-18	450mm
0-574-15	375mm	0-574-24	600mm

STARTER TO SWITCH LEADS

25MM² CROSS SECTION



CONDUCTOR	CURRENT RATING	TERMINALS
37/0.90mm	170A	8mm

QTY 1	QTY 5	
PART NO.	PART NO.	LENGTH
5-662-12	0-662-12	300mm
5-662-18	0-662-18	450mm
5-662-24	0-662-24	600mm

40MM² CROSS SECTION



CONDUCTOR	CURRENT RATING	TERMINALS
61/0.90mm	300A	10mm

QTY 1	QTY 5	
PART NO.	PART NO.	LENGTH
5-661-12	0-661-12	300mm
5-661-18	0-661-18	450mm
5-661-24	0-661-24	600mm

60MM² CROSS SECTION



CONDUCTOR	CURRENT RATING	TERMINALS
61/1.13mm	415A	10mm

QTY 5	
PART NO.	LENGTH
0-663-12	300mm
0-663-18	450mm

EARTH STRAPS

EARTH STRAPS, HEAVY-DUTY ROUND, TINNED COPPER



CONDUCTOR	CURRENT RATING	Ø	HOLE	QTY
16/32/0.30mm	260A	13mm	1mm	5

PART NO.	LENGTH	PART NO.	LENGTH
0-232-12	300mm	0-232-18	450mm
0-232-15	375mm	0-232-24	600mm

EARTH STRAPS, ROUND, TINNED COPPER



CONDUCTOR	CURRENT RATING	Ø	TERMINAL	QTY
24/09/0.30mm	110A	10mm	8mm	5

As illustrated

PART NO.	LENGTH	PART NO.	LENGTH
1-404-15	375mm	2-404-09	225mm
1-404-18	450mm		

EARTH STRAPS, ROUND, HEAVY-DUTY, TINNED COPPER



CONDUCTOR	CURRENT RATING	Ø	TERMINAL	QTY
16/32/0.30mm	260A	13mm	9.5mm	5

PART NO.	LENGTH
2-742-12	300mm
2-742-21	525mm

BONDING STRAPS, ROUND, TINNED COPPER



CONDUCTOR	CURRENT RATING	WIDTH	HOLE	QTY
32/16/0.20mm	110A	24mm	10mm	5

PART NO.	LENGTH	PART NO.	LENGTH
0-568-06	150mm	0-568-15	375mm
0-568-09	225mm	0-568-18	450mm
0-568-12	300mm	0-568-21	525mm

BONDING STRAPS, ROUND, TINNED COPPER



CONDUCTOR	CURRENT RATING	Ø	TERMINAL	QTY
24/9/0.30mm	110A	10mm	8mm	5

PART NO.	LENGTH	PART NO.	LENGTH
0-567-09	225mm	0-567-15	375mm
0-567-12	300mm	0-567-18	450mm

BONDING STRAPS, ROUND, HEAVY-DUTY, TINNED COPPER



CONDUCTOR	CURRENT RATING	Ø	TERMINAL	QTY
16/32/0.30mm	260A	13mm	9.5mm	5

PART NO.	LENGTH	PART NO.	LENGTH
0-393-06	150mm	0-393-18	450mm
0-393-09	225mm	0-393-21	525mm
0-393-12	300mm		

COPPER BRAIDS

FLAT 8MM WIDE, TINNED COPPER



CONDUCTOR	CURRENT RATING	CROSS SECTIONAL AREA	COIL
24/5/0.20mm	35A	4mm ²	5M
PART NO.	LENGTH		
0-190-00	8mm		

FLAT 24MM WIDE, TINNED COPPER



CONDUCTOR	CURRENT RATING	CROSS SECTIONAL AREA	COIL
32/16/0.20mm	110A	16mm ²	10M
PART NO.	LENGTH		
0-189-00	24mm		

Ø10MM, TINNED COPPER



CONDUCTOR	CURRENT RATING	CROSS SECTIONAL AREA	COIL
24/9/0.30mm	110A	16mm ²	10M
PART NO.	LENGTH		
0-288-00	10mm		

Ø13MM, TINNED COPPER



CONDUCTOR	CURRENT RATING	CROSS SECTIONAL AREA	COIL
16/32/0.30mm	260A	37mm ²	10M
PART NO.	LENGTH		
0-566-00	13mm		



LOOKING FOR BATTERY TERMINALS?
SEE PAGE 142-145.




With over 2000 parts, Durite is your one-stop shop for vehicle wiring. We supply high quality products at affordable prices. Whether you are repairing or building a new harness, we have 100s of terminals, connectors, fuses, sleeves and more. In fact, over 99% of Durite Customers are satisfied with the quality and diversity of our 'Wiring Accessories' range.

CIRCUIT PROTECTION

BLADE FUSES


MINI BLADE TYPE

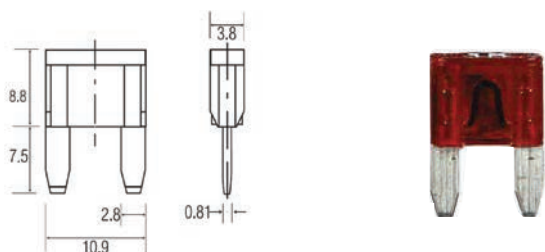

32V DC RATED ISO8820 UL248

QTY 10	QTY 50	QTY 200		
PART NO.	PART NO.	PART NO.	RATING	COLOUR
0-372-02	0-372-52	3-372-02	2A	Grey
0-372-03	0-372-53	3-372-03	3A	Violet
0-372-04	0-372-54	-	4A	Pink
0-372-05	0-372-55	3-372-05	5A	Tan
0-372-07	0-372-57	3-372-07	7.5A	Brown
0-372-10	0-372-60	3-372-10	10A	Red
0-372-15	0-372-65	3-372-15	15A	Blue
0-372-20	0-372-70	3-372-20	20A	Yellow
0-372-25	0-372-75	3-372-25	25A	Neutral
0-372-30	0-372-80	3-372-30	30A	Green
0-372-50	-	-	Assorted	Assorted


LOW PROFILE MINI BLADE TYPE

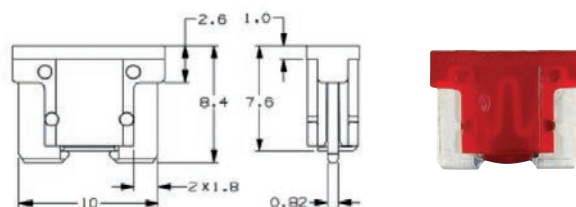

58V DC RATED

QTY 10		
PART NO.	RATING	COLOUR
0-371-02	2A	Grey
0-371-05	5A	Tan
0-371-07	7.5A	Brown
0-371-10	10A	Red
0-371-15	15A	Blue
0-371-20	20A	Yellow
0-371-25	25A	Neutral
0-371-30	30A	Green

BLADE TYPE

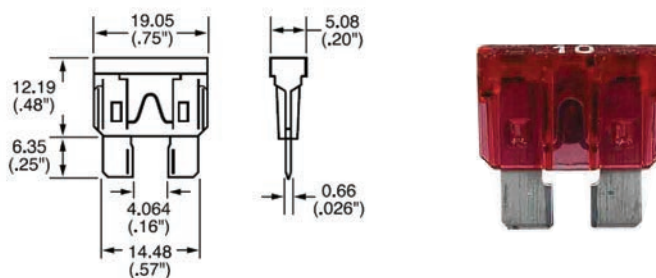

32V DC RATED ISO8820-3 UL24


QTY 10	QTY 50	QTY 200		
PART NO.	PART NO.	PART NO.	RATING	COLOUR
0-375-01	0-375-51	3-375-01	1A	Black
0-375-02	0-375-52	3-375-02	2A	Grey
0-375-03	0-375-53	3-375-03	3A	Violet
0-375-04	0-375-54	3-375-04	4A	Pink
0-375-05	0-375-55	3-375-05	5A	Tan
0-375-07	0-375-57	3-375-07	7.5A	Brown
0-375-10	0-375-60	3-375-10	10A	Red

QTY 10	QTY 50	QTY 200		
PART NO.	PART NO.	PART NO.	RATING	COLOUR
0-375-15	0-375-65	3-375-15	15A	Blue
0-375-20	0-375-70	3-375-20	20A	Yellow
0-375-25	0-375-75	3-375-25	25A	Neutral
0-375-30	0-375-80	3-375-30	30A	Green
0-375-35	0-375-85	-	35A	B/Green
0-375-40	0-375-90	3-375-40	40A	Orange
0-375-50	-	-	Assorted	Assorted

CABLE & WIRING ACCESSORIES CIRCUIT PROTECTION FUSES

MICRO 3 BLADE TYPE

32V DC RATED ISO8820-3 SAE2741

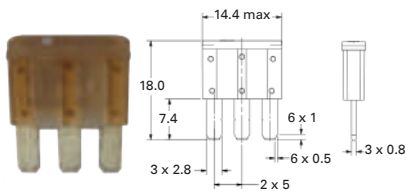

- 3 terminals with 2 fuse elements and common centre terminal
- Used on new Ford/Chrysler/Fiat vehicles

QTY 1		QTY 10	
PART NO.	PART NO.	RATING	COLOUR
0-371-55	0-371-56	5A	Tan
0-371-58	0-371-59	7.5A	Brown
0-371-60	0-371-61	10A	Red
0-371-65	0-371-66	15A	Blue

MICRO 2 BLADE TYPE

32V DC RATED ISO8820-3 SAE2741




- Silver plated terminals
- Used on Vauxhall, Ford, JLR, Volvo, Fiat, Nissan vehicles

QTY 10		QTY 50	
PART NO.	PART NO.	RATING	COLOUR
0-376-65	1-376-65	5A	Tan
0-376-67	1-376-67	7.5A	Brown
0-376-70	1-376-70	10A	Red
0-376-75	1-376-75	15A	Blue
0-376-80	1-376-80	20A	Yellow
0-376-82	1-376-82	25A	White
0-376-83	1-376-83	30A	Green

MAXI BLADE TYPE

32V DC RATED ISO8820-3 DIN 72581-3E

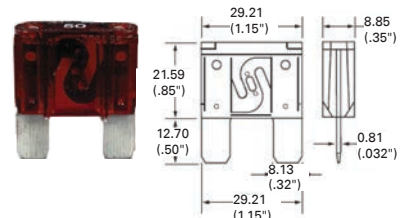

PART NO.	RATING	COLOUR	QTY
0-377-20	20A	Yellow	2
0-377-30	30A	Green	2
0-377-40	40A	Orange	2
0-377-50	50A	Red	2
0-377-60	60A	Blue	2
0-377-70	70A	Tan	2
0-377-80	80A	Neutral	2

FUSE PULLER



- For standard and mini blade fuses

PART NO.	DESCRIPTION	QTY
0-375-99	Fuse puller	10

FUSE TESTER PULLER



- Tests different size fuses
- LED light helps identify working fuses
- Tweezer end helps pull out faulty fuse


PART NO.	DESCRIPTION	QTY
0-534-29	Fuse tester puller	1



LOOKING FOR
FUSE BOXES?
SEE PAGE 191-192.

BOLT DOWN FUSES

STRIP LINK FUSES

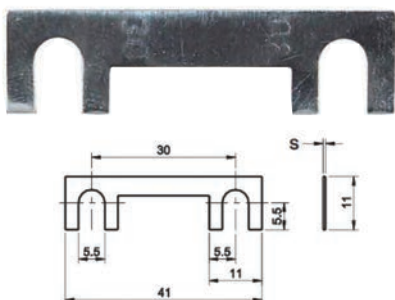

36V DC RATED	DIN 72581/2	
PART NO.	RATING	QTY
0-378-30	30A	10
0-378-40	40A	10
0-378-50	50A	10
0-378-60	60A	10
0-378-80	80A	10
0-378-10	100A	10




LOOKING FOR A
MATCHING FUSE
HOLDER? SEE PAGE 189.

CABLE & WIRING ACCESSORIES CIRCUIT PROTECTION FUSES

MIDI TYPE FUSES


32V DC RATED ISO8820-5 UL248

QTY 1	QTY 100			QTY 1		
PART NO.	PART NO.	RATING	COLOUR	PART NO.	RATING	COLOUR
0-378-13	3-378-13	30A	Orange	0-378-18	80A	White
0-378-14	3-378-14	40A	Green	0-378-20	100A	Blue
0-378-15	-	50A	Red	0-378-22	125A	Pink
0-378-16	-	60A	Yellow	0-378-25	150A	Grey
0-378-17	3-378-17	70A	Brown	0-378-33	200A	Violet

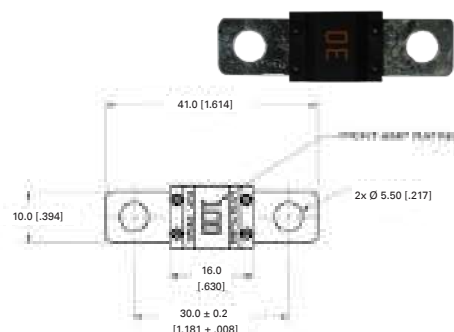

MEGA TYPE FUSES

PART NO.	RATING	COLOUR	QTY	PART NO.	RATING	COLOUR	QTY
0-376-10	100A	Yellow	1	0-376-40	400A	Purple	1
0-376-12	125A	Green	1	0-376-45	450A	Dark yellow	1
0-376-15	150A	Orange	1	0-376-55	500A	Brown	1
0-376-17	175A	White	1				
0-376-20	200A	Blue	1				
0-376-22	225A	Tan	1				
0-376-25	250A	Pink	1				
0-376-30	300A	Grey	1				
0-376-35	350A	Dark green	1				

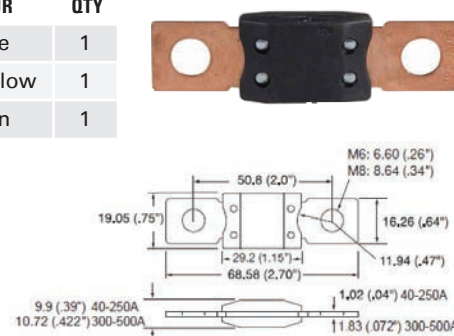

AFTERMARKET FUSES

AFTERMARKET MIDI TYPE FUSES

32V DC RATED PBT HOUSING ZINC BLADE

PART NO.	RATING	COLOUR	QTY
0-368-13	30A	Orange	1
0-368-14	40A	Green	1
0-368-15	50A	Red	1
0-368-16	60A	Yellow	1
0-368-17	70A	Brown	1
0-368-18	80A	White	1
0-368-20	100A	Blue	1
0-368-22	125A	Pink	1



AFTERMARKET BLADE TYPES

32V DC RATED TIN PLATED ZINC ALLOY

PART NO.	RATING	COLOUR	QTY
0-365-02	2A	Grey	50
0-365-03	3A	Violet	50
0-365-04	4A	Pink	50
0-365-05	5A	Tan	50
0-365-07	7.5A	Brown	50
0-365-10	10A	Red	50
0-365-15	15A	Blue	50
0-365-20	20A	Yellow	50
0-365-25	25A	Natural	50
0-365-30	30A	Green	50
0-365-40	40A	Orange	50



CABLE & WIRING ACCESSORIES CIRCUIT PROTECTION FUSES

AFTERMARKET MINI BLADE TYPE



32V DC RATED

TIN PLATED

ZINC ALLOY

QTY 50

PART NO.	RATING	COLOUR
0-362-03	3A	Violet
0-362-04	4A	Pink
0-362-05	5A	Tan
0-362-07	7.5A	Brown
0-362-10	10A	Red
0-362-15	15A	Blue
0-362-20	20A	Yellow
0-362-25	25A	Natural
0-362-30	30A	Green

AFTERMARKET MEGA TYPE FUSE



32V DC RATED

PBT HOUSING


ZINC BLADE

PART NO.	RATING	COLOUR	QTY
0-366-10	100A	Yellow	1
0-366-12	125A	Green	1
0-366-15	150A	Orange	1
0-366-17	175A	White	1
0-366-20	200A	Blue	1
0-366-22	225A	Tan	1
0-366-25	250A	Pink	1
0-366-55	500A	Brown	1


PAL TYPE FUSES, 32V DC RATED, JASO 0612

PAL TYPE MALE, SHORT OR LONG LEGS

Short Legs

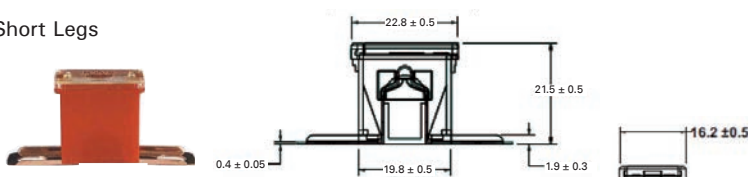


Long Legs

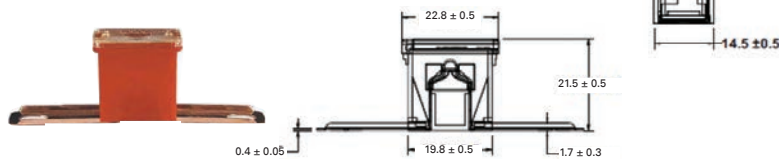


SHORT LEGS	LONG LEGS	RATING	COLOUR	QTY
0-379-63	0-379-73	30A	Pink	1
0-379-64	0-379-74	40A	Green	1
0-379-65	0-379-75	50A	Red	1
0-379-66	0-379-76	60A	Yellow	1
0-379-67	0-379-77	70A	Brown	1
0-379-68	0-379-78	80A	Black	1
0-379-70	0-379-80	100A	Blue	1
-	0-379-82	120A	White	1

PAL TYPE MALE



PART NO.	RATING	COLOUR	QTY
0-379-53	30A	Pink	1
0-379-54	40A	Green	1
0-379-55	50A	Red	1
0-379-56	60A	Yellow	1
0-379-57	70A	Tan	1
0-379-58	80A	Black	1
0-379-60	100A	Blue	1
0-379-62	120A	White	1


PAL TYPE FEMALE

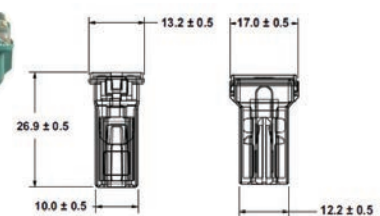

PART NO.	RATING	COLOUR	QTY
0-379-13	30A	Pink	1
0-379-14	40A	Green	1


CABLE & WIRING ACCESSORIES CIRCUIT PROTECTION FUSES

PAL TYPE FEMALE

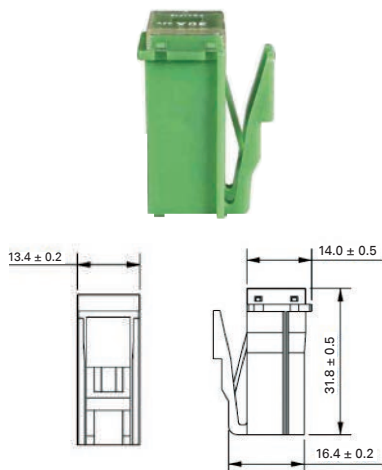


PART NO.	RATING	COLOUR	QTY
0-379-30	30A	Green	1

PAL TYPE FEMALE

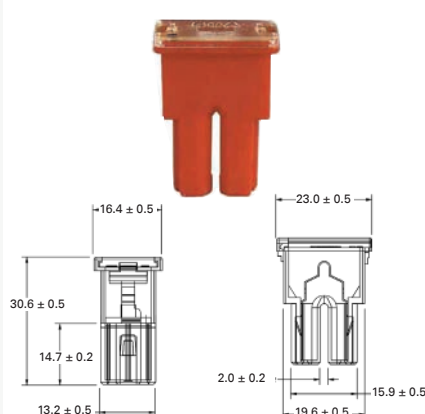

PART NO.	RATING	COLOUR	QTY
0-379-02	20A	Blue	1
0-379-03	30A	Pink	1
0-379-04	40A	Green	1
0-379-05	50A	Red	1
0-379-06	60A	Yellow	1


PAL TYPE FEMALE

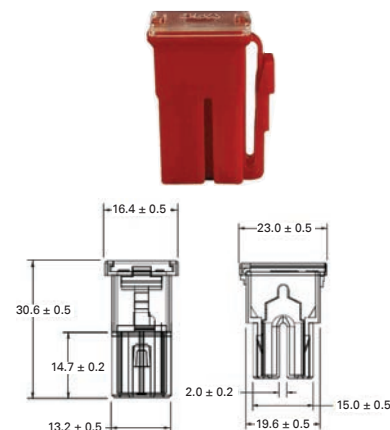

PART NO.	RATING	COLOUR	QTY
0-379-44	45A	Red	1
0-379-46	65A	Black	1
0-379-47	75A	Grey	1


JCASE TYPE FUSES

JCASE FEMALE CARTRIDGE



PART NO.	RATING	COLOUR	QTY
0-379-32	20A	Blue	1
0-379-33	30A	Pink	1
0-379-34	40A	Green	1
0-379-35	50A	Red	1
0-379-36	60A	Yellow	1


JCASE FEMALE CARTRIDGE LOW PROFILE



PART NO.	RATING	COLOUR	QTY
0-379-15	20A	Blue	1
0-379-16	25A	White	1
0-379-17	30A	Pink	1
0-379-18	40A	Green	1
0-379-19	50A	Red	1
0-379-20	60A	Yellow	1



FOR MORE INFO, VISIT WWW.DURITE.CO.UK
OR CONTACT INFO@DURITE.CO.UK



CABLE & WIRING ACCESSORIES CIRCUIT PROTECTION FUSES

MCASE+ TYPE FUSES

MCASE+

32V DC RATED ISO8820-4 SAE2741



- Used on Vauxhall, Ford, JLR, Volvo, Fiat, Nissan

QTY 1	QTY 10		
PART NO.	PART NO.	RATING	COLOUR
0-379-08	1-379-08	15A	Grey
0-379-09	1-379-09	20A	Blue
0-379-10	1-379-10	25A	Natural
0-379-11	1-379-11	30A	Pink
0-379-12	1-379-12	40A	Green

CONTINENTAL

25MM CONTINENTAL

36V DC RATED DIN 72581-1



QTY 10	QTY 50		
PART NO.	PART NO.	RATING	COLOUR
0-230-05	0-230-55	5A	Yellow
0-230-08	0-230-58	8A	White
0-230-16	0-230-66	16A	Red
0-230-25	0-230-75	25A	Blue

MAINS TYPE FUSES

MAINS TYPE TO BS1362



PART NO.	RATING	COLOUR	QTY
0-696-03	3A	Red	10
0-696-53	3A	Red	50
0-696-05	5A	Black	10
0-696-55	5A	Black	50
0-696-13	13A	Brown	10
0-696-63	13A	Brown	50
3-696-13	13A	Brown	200



LOOKING FOR FUSE HOLDER OR BOX FOR 25MM CONTINENTAL?

FUSE HOLDER 0-591-50 | FUSE BOXES 0-234-00 | SEE PAGE 190 & 192.



GLASS FUSES

32MM FLAT ENDED X 6.3MM Ø



⚡ Blow rating is specified as double the continuous rating.

PART NO.	CONTINUOUS RATING	QTY
0-374-01	1A	10
0-374-02	2A	10
0-374-03	3A	10
0-374-04	4A	10
0-374-05	5A	10
0-374-07	7.5A	10
0-374-10	10A	10

PART NO.	CONTINUOUS RATING	QTY
0-374-15	15A	10
0-374-25	25A	10
0-374-30	30A	10
0-374-35	17.5A	10
0-374-85	17.5A	50
0-374-40	20A	10
0-374-50	50A	10

29MM FLAT ENDED X 6.3MM Ø



⚡ Blow rating is specified as double the continuous rating.

PART NO.	CONTINUOUS RATING	QTY
0-355-10	5A	10
0-355-20	10A	10
0-355-30	15A	10
0-355-40	20A	10
0-355-50	25A	10

CABLE & WIRING ACCESSORIES CIRCUIT PROTECTION FUSES

20MM X 5.0MM Ø RADIO, RAPID BLOW

Q LOOKING FOR? Fitting fuse holder 0-584-02. See page 190.



PART NO.	RATING	QTY
0-373-01	1A	10
0-373-51	1A	50
0-373-02	2A	10
0-373-52	2A	50
0-373-03	3A	10

PART NO.	RATING	QTY
0-373-53	3A	50
0-373-05	5A	10
0-373-55	5A	50
0-373-08	8A	10
0-373-58	8A	50

PART NO.	RATING	QTY
0-373-15	15A	10
0-373-65	15A	50
0-373-20	20A	10
0-373-70	20A	50



LOOKING FOR ASSORTED FUSE KITS?
SEE PAGE 195.



DIODES

MINI DIODE




- Diode, mini fuse size, 1A 150V

PART NO.	QTY
0-372-00	10

UNIVERSAL INLINE DIODE

- Universal in-line diode, 10A 50VDC, with male (-) and female (+) 6.30mm Lucar terminals

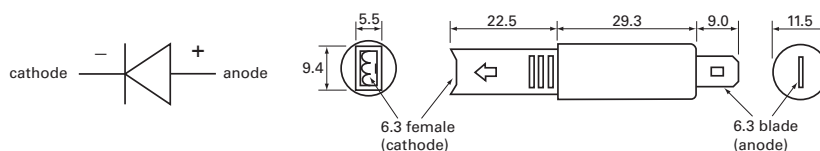

PART NO.	QTY
0-834-10	10

⚡ For current to flow the diode must be forward biased by connecting the anode to positive and cathode to negative.



@ WWW.DURITE.CO.UK

+44 (0) 1255 555 200

✉ SALES@DURITE.CO.UK

CIRCUIT BREAKERS

CIRCUIT BREAKER FOR 12/24 VOLT DC SYSTEMS

MINI BLADE FUSE TYPE



- Thermal with manual re-set
- Will replace standards mini blade fuses in many fuseholders and boxes

PART NO.	RATED AT	COLOUR	QTY
0-380-55	5A	Tan	1
0-380-60	10A	Red	1
0-380-65	15A	Blue	1

BLADE FUSE TYPE



- Thermal bi-metallic with manual re-set
- Will replace standard blade fuses in many fuseholders and boxes

PART NO.	RATED AT	COLOUR	QTY
0-380-06	6A	Green	1
0-380-08	8A	Tan	1
0-380-10	10A	Red	1
0-380-15	15A	Blue	1
0-380-20	20A	Yellow	1
0-380-25	25A	White	1
0-380-30	30A	Light green	1

TALL BLADE FUSE TYPE



- Thermal bi-metallic high performance double contact mechanism with manual re-set and manual trip
- Will replace standard blade fuses in many fuseholders and boxes

PART NO.	RATED AT	COLOUR	QTY
0-381-06	6A	Green	1
0-381-08	8A	Tan	1
0-381-10	10A	Red	1
0-381-15	15A	Blue	1
0-381-20	20A	Yellow	1

CIRCUIT BREAKERS 12/24 VOLT



- Thermal bi-metallic with manual re-set and manual trip
- For panel hole, 11.2 x 10mm
- Supplied with 1 x hex nut, 1 x knurled ring

✂ Screw connections.

PART NO.	RATED AT	QTY
0-381-55	5A	1
0-381-60	10A	1
0-381-65	15A	1
0-381-70	20A	1
0-381-75	25A	1
0-381-80	30A	1
0-381-85	35A	1
0-381-90	40A	1
0-381-95	45A	1
0-381-99	Circuit breaker dust cap	1

FLUSH MOUNT CIRCUIT BREAKERS

- 12/24V



PART NO.	RATED AT	QTY
0-382-55	50A flush mount	1
0-382-56	60A flush mount	1
0-382-58	80A flush mount	1
0-382-60	100A flash mount	1
0-382-65	150A flush mount	1
0-382-70	200A flush mount	1
0-383-99	Mounting bracket	1

PANEL MOUNT HI-AMP CIRCUIT BREAKER S

- 12/24V



PART NO.	RATED AT	QTY
0-383-55	50A panel mount	1
0-383-58	80A panel mount	1
0-383-60	100A panel mount	1
0-383-98	Spare panel mount mounting pad	1
0-383-99	Mounting bracket	1

CABLE & WIRING ACCESSORIES CIRCUIT PROTECTION CIRCUIT BREAKERS

MANUAL RESET & TRIP TYPE

- Thermal bi-metallic with re-set push button and manual trip
- For panel hole, 13.8 x 16mm



PART NO.	RATED AT	QTY
0-382-10	10A	1
0-382-15	15A	1
0-382-97	Splash proof cover for above	1

PANEL / BASE MOUNT TYPE

- Thermal bi-metallic with manual re-set
- For panel mounting in 9.6mm diameter hole or on 6.3mm blade base, (part numbers 0-384-98 or 0-384-99)



PART NO.	RATED AT	QTY
0-383-05	5A	1
0-384-97	Splash proof cover for above	1

PANEL / BASE MOUNT TYPE

- Thermal bi-metallic with manual re-set and manual trip
- For panel mounting in 9.6mm diameter hole or on 6.3mm blade base, part numbers 0-384-98 blade or 0-384-99 screw



PART NO.	RATED AT	QTY
0-384-05	5A	1
0-384-07	7A	1
0-384-10	10A	1
0-384-15	15A	1
0-384-20	20A	1
0-384-25	25A	1
0-384-97	Splash proof cover for above	1

PANEL MOUNT TYPE

- Thermal bi-metallic with manual re-set
- For panel mounting in 12mm diameter hole

PART NO.	RATED AT	QTY
0-388-20	20A	1
0-388-30	30A	1
0-388-40	40A	1
0-388-50	50A	1
0-388-60	60A	1
0-388-70	70A	1
0-388-97	Splash proof cover for above	1



MOUNTING BLOCKS FOR CIRCUIT BREAKERS

CABLE CONNECTION 6.3MM BLADES

- Moulded plastic mounting bases accommodating 2 circuit breakers
- Can be joined together to form a bank



PART NO.	DESCRIPTION	QTY
0-384-98	Accepts 6.3mm blades	1
0-385-98	Accepts 4.4mm pins	1

CABLE CONNECTION SCREW TERMINALS

- Moulded plastic mounting bases accommodating 2 circuit breakers
- Can be joined together to form a bank



PART NO.	DESCRIPTION	QTY
0-384-99	Accepts 6.3mm blades	1
0-385-99	Accepts 4.4mm pins	1

FUSE HOLDERS

BLADE FUSE HOLDERS

MINI BLADE FUSE HOLDERS



- With flying leads
- Snap-on splash proof cover
- Maximum fuse rating 15A continuous

PART NO.	QTY	PART NO.	QTY
0-372-90	5	3-372-90	100
5-372-90	1		



- 'Add a Circuit' type mini blade fuse holder, adds one extra fuse when use to replace a blade fuse in a fuse box
- Maximum fuse rating 10A continuous

PART NO.	QTY	PART NO.	QTY
0-372-99	5	3-372-99	100
5-372-99	1		

PANEL MOUNT BLADE FUSE HOLDER



- For mounting into a hole 22 x 11mm
- 6.3mm blade terminal
- Maximum fuse rating 30A continuous

PART NO.	QTY
0-376-50	10

MAXI BLADE IN-LINE FUSE HOLDER



- With flying leads
- Splash proof cover
- Maximum fuse rating of 100A continuous

PART NO.	QTY
0-377-90	1

MAXI BLADE FUSE HOLDER



- Supplied with 2 sizes of terminal for 4 - 10mm² cable
- Mounting bracket
- Can be clipped together to make multiple fuse block

PART NO.	QTY
0-377-00	1

BLADE FUSE HOLDERS



- With bracket
- Supplied with terminals
- Can be clipped together to make multiple fuse blocks
- Can also be gang mounted to relay bulkhead sockets
- Max cable size 1.25mm²
- Max fuse 15A

PART NO.	QTY
0-376-02	1
3-376-02	100



- Splash proof
- Complete with terminals for 0.5 - 1.5mm cable, silicon cable seals and bulkhead mounting plate
- Suitable for up to 30A blade fuses with a maximum continuous current 21A
- Can be clipped together to make multiple fuse block

PART NO.	QTY
0-376-03	1



- 6.3mm blade terminal
- Can be clipped together to make multiple fuse block

PART NO.	DESCRIPTION	QTY
0-376-00	Fuse holder	10
3-376-00	Fuse holder	250
0-376-01	Mounting plate for above	10
3-376-01	Bulkhead plate	250

CABLE & WIRING ACCESSORIES CIRCUIT PROTECTION FUSE HOLDERS

BLADE FUSE HOLDERS



- 30A continuous rating
- With flying leads

PART NO.	QTY
0-376-60	5
3-376-60	100
5-376-60	1



- With flying leads
- Snap-on splash proof cover
- Maximum fuse rating 30A continuous

PART NO.	QTY
0-376-90	5
3-376-90	100
5-376-90	1



- 'Add a Circuit' type blade fuse holder, adds one extra fuse when used to replace a blade fuse in a fuse box
- Maximum fuse rating 10A continuous

PART NO.	QTY
0-376-99	5
5-376-99	1

STRIP LINK/MIDI FUSE HOLDERS

FOR 0-378-XX, MIDI FUSES & 0-376-XX RANGE

- For 0-378-xx range and MIDI range of fuses
- For 0-376-xx Aftermarket MIDI fuses
- M5 studs

PART NO.	QTY
0-378-00	1
3-378-00	100
0-378-85	1
3-378-85	100



MEGA FUSE HOLDERS

FOR MEGA FUSES UP TO 500A

- For the MEGA range of fuses up to 500A rating
- M8 studs
- Side stackable & surface mounted

PART NO.	QTY
0-376-85	1
3-376-85	100



MICRO 2 & 3 FUSE HOLDER & FUSE TAP

FOR MICRO 3 FUSES UP TO 20A

- Maximum fuse rating of 20A
- Fuse tap add-on 20A



PART NO.	DESCRIPTION	QTY
0-371-99	FuseTap	5
0-371-90	Splash proof	5
0-371-91	Waterproof. IP67	5

FOR MICRO 2 FUSES UP TO 30A

- Maximum fuse rating of 30A
- Fuse tap add-on 25A



PART NO.	DESCRIPTION	QTY
0-376-89	FuseTap	5
0-376-91	Splash proof	5

CABLE & WIRING ACCESSORIES CIRCUIT PROTECTION FUSE HOLDERS

IN-LINE FUSE HOLDERS

FOR 32MM FUSES



- Moulded in white nylon
- Cable connections to 6.3mm terminals on 2.00mm² cable
- Supplied without fuse

PART NO.	QTY
0-584-00	5



- Moulded in black phenol
- Screw terminal cable connections
- Supplied with 35A fuse

PART NO.	QTY
0-591-00	5



- Splash proof - protected to IP66
- For fuses up to 10A rating
- Moulded in polybutylene with PVC grommets and a nitrile "O" ring
- Nickel plated brass screw terminal cable connection

PART NO.	QTY
0-584-90	5

FOR 20MM RADIO FUSES



- Moulded black phenol
- Bayonet fixing, with cable connections to screw terminals
- Supplied with 2A rated fuse

PART NO.	QTY
0-584-02	5

PANEL MOUNTED FUSE HOLDERS

FOR 32MM FUSES



- For fuses up to 10A rating
- For mounting into Ø 13mm hole
- Bayonet retaining cap for fuse
- 6.3mm blade terminal cable connections
- Length 60mm

PART NO.	QTY
0-591-50	5
5-591-50	1

CABLE & WIRING ACCESSORIES CIRCUIT PROTECTION FUSES BOXES

BLADE TYPE FUSE BOXES

BOTTOM CABLE ENTRY

- 6.3mm blade terminal cable connections with 2 hole fixing
- Supplied without fuses

 Cable entry from underneath.



PART NO.	DESCRIPTION	QTY
0-234-14	4-way fuse	1
0-234-16	6-way fuse	1

SIDE CABLE ENTRY

- 6.3mm blade terminal cable connections with 2 hole fixing
- Supplied without fuses



PART NO.	DESCRIPTION	QTY
0-234-24	4-way fuse	1
0-234-26	6-way fuse	1
0-234-28	8-way fuse	1

FUSE BOX, 8-WAY



- Blade fuse box, through panel mounting
- 6.3mm blade terminals cable connections
- Supplied without fuses
- Cable entry from underneath

PART NO.	DESCRIPTION	QTY
0-234-18	8-way	1

FUSE BOX, 10-WAY



- Splash proof blade fuse box with LED indicators, max 25A per fuse, 150A total fuse box

PART NO.	DESCRIPTION	QTY
0-234-60	10-way	1

FUSE HOLDER, 16-WAY



- 16-way blade fuse holder
- Supplied complete with terminals with removable mounting feet

PART NO.	DESCRIPTION	QTY
0-234-66	16-way	1

BUSBAR FUSE BOXES - MINI BLADE



- For mini blade type fuses
- Common busbar for input with M5 stud and 6.3mm blade terminal outputs
- Maximum load 100A

PART NO.	DESCRIPTION	QTY
0-234-34	4-way fuse	1
0-234-36	6-way fuse	1
0-234-30	10-way fuse	1

BUSBAR FUSE BOXES - BLADE



- For blade type fuse
- Common busbar for input with M5 stud and 6.3mm blade terminal outputs
- Maximum busbar load 100A

PART NO.	DESCRIPTION	QTY
0-234-44	4-way fuse	1
0-234-46	6-way fuse	1
0-234-40	10-way fuse	1

LED FUSE BOXES AND BUSBARS



LOOKING FOR RELAY BOXES?

0-729-05 & 0-729-06 | [SEE PAGE 254.](#)

LED FUSE BOX, 6-WAY



- 32V
- 100A max
- 6-Way fuse box for input with M5 stud
- Wire input #4-6AWG, Output #12-16AWG
- Output terminal 30A max per circuit

PART NO.	DESCRIPTION	QTY
0-234-56	6-way	1

LED FUSE BOX, 10-WAY



- 32V
- 100A max
- 10-Way fuse box for input with M5 stud
- Wire input #4-6AWG, Output #12-16AWG
- Output terminal 30A max per circuit

PART NO.	DESCRIPTION	QTY
0-234-50	10-way	1

LED FUSE BOX & BUSBAR



- 32V
- 100A max
- 6-Way LED fuse box & bus bar
- M4 & M5 stud
- Output terminal 30A max per circuit

PART NO.	DESCRIPTION	QTY
0-234-76	6-way	1

LED FUSE BOX & BUSBAR



- 32V
- 100A max
- 12-Way LED fuse box & bus bar
- M4 & M5 stud
- Output terminal 30A max per circuit

PART NO.	DESCRIPTION	QTY
0-234-82	12-way	1

LUCAS REPLICA

4-WAY, THROUGH PANEL MOUNT



- Storage for 2 spare fuses
- Through panel mounting, 6.3mm blade terminals
- Supplied without fuses
- Replaces 6FJ, 37409 and 37564
- For 29mm glass fuses

 Lucas Replica.

PART NO.	DESCRIPTION	QTY
0-237-06	4-way	1

4-WAY SURFACE MOUNT



- Surface mounting with screw terminals
- Supplied without fuses
- Replaces 54038067, SF4
- For 29mm glass fuses

 Lucas Replica.

PART NO.	DESCRIPTION	QTY
0-237-01	4-way	1

CONTINENTAL BOX

8A CONTINENTAL FUSES



- Continental type fuse box with screw terminals
- Supplied with 8A continental fuses

PART NO.	DESCRIPTION	QTY
0-234-00	4-way fuse	1

ASSORTMENT BOXES

ASSORTED PRE-INSULATED TERMINALS

RED PRE-INSULATED TERMINALS




- Suitable for cables 0.5-1.0mm²

PART NO. **PCS**

0-203-01 260

BLUE PRE-INSULATED TERMINALS



- Suitable for cables 1.5-2.5mm²

PART NO. **PCS**

0-203-02 280

YELLOW PRE-INSULATED TERMINALS



- Suitable for cables 3.0-6.0mm²

PART NO. **PCS**

0-203-03 110

PUSH-ON ASSORTED PRE-INSULATED TERMINALS



- Suitable for cables 0.5-6.0mm²

PART NO. **PCS**

0-203-04 221

RING & FORK ASSORTED PRE-INSULATED TERMINALS



- Suitable for cables 0.5-6.0mm²

PART NO. **PCS**

0-203-05 205

ASSORTED PRE-INSULATED TERMINALS



- Suitable for cables 0.5-6.0mm²

PART NO. **PCS**

0-203-06 365

HEATSHRINK PRE-INSULATED TERMINALS



PART NO. **PCS**

0-203-07 160

ASSORTED GROMMETS

ASSORTED SIZED WIRING GROMMETS



- Wiring grommets in a sectionalised plastic box, 280 piece comprises of:
0-447-36 x 50, 0-447-39 x 50,
0-447-42 x 50, 0-447-46 x 50,
0-447-50 x 50, 0-447-55 x 30

PART NO.	PCS
0-447-30	280

ASSORTED SIZED BLANKING GROMMETS



- Blanking grommets in a sectionalised plastic box, 280 piece comprises of:
0-452-36 x 50, 0-452-39 x 50,
0-452-42 x 50, 0-452-46 x 50,
0-452-50 x 50, 0-452-55 x 30

PART NO.	PCS
0-452-30	280

ASSORTED CONNECTOR BOXES

ASSORTED SUPERSEAL CONNECTORS

- Assorted superseal connectors, in a sectional plastic box, 180 pieces comprises of:
3-011-62 x 5, 3-011-63 x 2, 3-011-64 x 1,
3-011-65 x 1, 3-011-66 x 1, 3-011-60 x 40,
3-011-60 x 40, 3-011-52 x 5, 3-011-53 x
2, 3-011-54 x 1, 3-011-55 x 1, 3-011-56 x 1,
3-011-50 x 40, 3-011-50 x 40.



PART NO.	PCS
0-011-69	180

ASSORTED DEUTSCH DT CONNECTORS

- Assorted Deutsch DT connectors, in a sectional plastic box., 152 pieces comprises of:
3-011-42 & 3-11-42 x 5, 3-011-43 & 3-11-43 x 2, 3-011-44
& 3-11-44 x 4, 3-011-46 & 3-11-46 x 1, 3-011-48 &
3-11-48 x 1, 3-011-96 x 50, 3-001-32 & 3-11-32 x 5,
3-011-33 & 3-11-33 x 2, 3-011-34 & 3-11-34 x 4, 3-011-36
& 3-11-36 x 1, 3-011-38 & 3-11-38 x 1, 3-011-95 x 50.



PART NO.	PCS
0-011-30	152

ASSORTED BLADE MULTIPLE CONNECTORS

- Assorted blade multi connectors, in a sectional plastic box, 286 pieces comprises of:
0-011-16 x 2, 0-011-15 x 2, 0-011-14 x 4, 0-011-13 x
5, 0-011-12 x 5, 0-011-10 x 5, 0-011-23 x 60, 0-011-
24 x 60, 0-011-06 x 2, 0-011-05 x 2, 0-011-04 x 4,
0-011-03 x 5, 0-011-02 x 5, 0-011-01 x 5, 0-011-21
x 60, 0-011-22 x 60.



PART NO.	PCS
0-011-00	286

ASSORTED MATE-N-LOCK CONNECTORS

- Assorted mate-n-lock connectors, in a sectional plastic box, 226 pieces comprises of:
0-013-12 x 4, 0-013-13 x 3, 0-013-14 x 2, 0-013-16 x 2,
0-013-17 x 2, 0-013-23 x 100, 0-013-02 x 4,
0-013-03 x 3, 0-013-04 x 2, 0-013-06 x 2, 0-013-07 x 2,
0-013-21 x 100



PART NO.	PCS
0-013-00	226

CABLE & WIRING ACCESSORIES CIRCUIT PROTECTION ASSORTMENT BOXES

ASSORTED HEATSHRINK BOXES

ADHESIVE LINED HEATSHRINK ASSORTMENT

- Contents: 0-329-09 x 15, 0-329-06 x 12, 0-329-04 x 25, 0-329-03 x 30, 0-329-12 x 15, 0-329-19 x 10
- Suitable for cables with inside Ø 3.2-19.0mm



PART NO.	PCS
0-329-00	175

HEATSHRINK ASSORTMENT

- Contents: 0-333-03 x 30, 0-333-04 x 30, 0-333-06 x 50, 0-333-09 x 25, 0-333-19 x 20, 0-333-12 x 20
- Suitable for cables with inside Ø 3.0-19.1mm



PART NO.	PCS
0-333-00	175

ASSORTED FUSE KITS

MINI, BLADE & MAXI FUSE KIT

- 3A-60A
- Mini, blade & maxi fuse kit in a sectionalised plastic box contents:
0-372-05 x 15, 0-372-10 x 15, 0-372-15 x 15, 0-372-20 x 15, 0-372-30 x 15, 0-375-03 x 10, 0-375-05 x 20, 0-375-07 x 10, 0-375-10 x 20, 0-375-15 x 20, 0-375-20 x 20, 0-375-30 x 10, 0-377-30 x 3, 0-377-40 x 3, 0-377-50 x 3, 0-377-60 x 3



PART NO.	PCS
0-235-01	197

ASSORTED MICRO 2, MICRO 3 & M-CASE FUSES

- Assorted Micro 2, Micro 3 & M-case fuses, in a sectional plastic box, 89 pieces comprises of:
0-376-67 x 8, 0-376-75 x 8, 0-376-82 x 8, 0-371-55 x 5, 0-371-60 x 5, 0-379-08 x 2, 0-379-10 x 2, 0-379-12 x 2, 0-376-65 x 8, 0-376-70 x 8, 0-376-80 x 8, 0-376-83 x 8, 0-371-58 x 5, 0-371-65 x 5, 0-379-09 x 2, 0-379-11 x 2



PART NO.	PCS
0-235-05	86

MIDI, MEGA & STRIPLINK FUSE KIT

- 30A-250A
- Midi, mega & striplink fuse kit in a sectionalised plastic box contents:
0-376-10 x 3, 0-376-15 x 3, 0-376-20 x 3, 0-376-25 x 3, 0-378-13 x 5, 0-378-14 x 5, 0-378-15 x 5, 0-378-16 x 5, 0-378-20 x 5, 0-378-30 x 10, 0-378-40 x 10, 0-378-50 x 10



PART NO.	PCS
0-235-04	67

J-CASE & PAL FUSE KIT

- 20A-120A
- J-Case & PAL fuse kit in a sectionalised plastic box contents:
0-379-32 x 4, 0-379-33 x 4, 0-379-34 x 4, 0-379-36 x 4, 0-379-15 x 4, 0-379-17 x 4, 0-379-18 x 4, 0-379-20 x 4, 0-379-58 x 2, 0-379-60 x 2, 0-379-62 x 2, 0-379-03 x 2, 0-379-04 x 2, 0-379-44 x 2, 0-379-05 x 2, 0-379-06 x 2



PART NO.	PCS
0-235-02	48

CABLE & WIRING ACCESSORIES CIRCUIT PROTECTION ASSORTMENT BOXES

20MM, 32MM GLASS & CONTINENTAL FUSE KIT



- 1A-25A
- 20mm, 32mm Glass & continental fuse kit in a sectionalised plastic box contents: 0-230-05 x 20, 0-230-08 x 20, 0-230-16 x 20, 0-230-25 x 20, 0-373-01 x 20, 0-373-02 x 20, 0-373-03 x 20, 0-373-05 x 20, 0-373-08 x 20, 0-373-15 x 20, 0-374-05 x 10, 0-374-10 x 10, 0-374-15 x 10, 0-374-25 x 10, 0-374-35 x 10, 0-374-50 x 10

PART NO.	PCS
----------	-----

0-235-03	260
----------	-----

ASSORTED COPPER TUBE BOXES

ASSORTED COPPER BUTT CONNECTORS



- For cables 10-95mm².
- Assorted copper butt connectors in a sectionalised plastic box, 100 pieces comprises of: 0-008-20 x 20, 0-008-30 x 30, 0-008-40 x 30, 0-008-50 x 5, 0-008-60 x 5, 0-008-70 x 5, 0-008-80 x 5

PART NO.	PCS
----------	-----

0-008-10	100
----------	-----

ASSORTED COPPER TUBE TERMINALS



- For cables 10mm²-95mm²
- Assorted copper tube terminals in a sectionalised plastic box, 78 pieces comprises of: 0-008-22 x 8, 0-008-23 x 8, 0-008-32 x 8, 0-008-33 x 8, 0-008-32 x 8, 0-008-43 x 5, 0-008-44 x 5, 0-008-53 x 5, 0-008-54 x 5, 0-008-63 x 5, 0-008-64 x 5, 0-008-74 x 4, 0-008-75 x 4.

PART NO.	PCS
----------	-----

0-008-15	78
----------	----

ASSORTMENT BOX STAND

ASSORTMENT BOX STAND



- H 470 x W 295 x D 220mm
- Holds up to 10 assortment kit boxes

PART NO.	QTY
----------	-----

STAND10	1
---------	---

05

POWER CONVERSION



MODIFIED WAVE INVERTERS 198

SINE WAVE INVERTERS.....200

VOLTAGE CONVERTERS.....206

**OVER 45 MODELS TO
CHOOSE FROM. GET
POWER ANYWHERE,
ANYTIME!**



POWER INVERTERS

A power inverter converts DC Battery power to Mains AC power. This enables anyone to power electrical devices remotely. Power inverters are commonly used in both the commercial and the leisure markets.

“ Get AC power
anywhere, anytime. ”

MODIFIED WAVE OR SINE WAVE?



MODIFIED

- ✓ Economical option
- ✓ Ideal for simpler current loads such as lighting and motors
- ✓ Works with most equipment
- ✓ An approximate reproduction of Mains power




SINE

- ✓ Suitable for all applications
- ✓ Ideal for sensitive electronic devices such as laptops and TVs
- ✓ An exact reproduction of Mains power

MODIFIED WAVE INVERTERS

COMPACT MODIFIED WAVE INVERTERS

- 110VAC or 230VAC output
- Suitable for smart charging vehicles
- Fast USB charging 2.1A output
- Protected against overload, over temperature, low battery & short-circuits with warning light
- 230VAC inverters are supplied with 2 x standard 3-pin BS1363 UK socket outlet, on/off/remote switch. (Only 1 socket on 140W model)
- 110VAC inverter supplied with 1 x IEC 60909-2 socket, rated 32A and on/off/remote switch (Supports EURO 6 Requirements)
- E-Marked, EMC, R10 approved

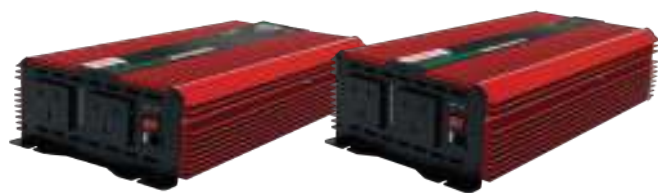


3000W

2000W



1500W

1000W

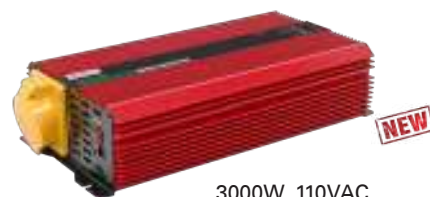

3000W, 110VAC



140W

	PART NO.	WATTS	QUIESCENT CURRENT	VAC	QTY
12V	0-856-00	140W	<0.45A	230VAC	1
	0-856-20	1000W	<0.35A	230VAC	1
	0-856-25	1500W	<0.4A	230VAC	1
	0-856-26	2000W	<0.5A	230VAC	1
	0-856-40	3000W	<0.6A	230VAC	1
	0-856-41	3000W	<0.5A	110VAC	1
24V	0-856-70	1000W	<0.35A	230VAC	1
	0-856-75	1500W	<0.4A	230VAC	1
	0-856-76	2000W	<0.5A	230VAC	1



Smaller in size & more
economical



Fast USB Charging

FULL TECHNICAL SPECIFICATIONS CAN BE FOUND ON PAGES 202–203.

POWER CONVERSION MODIFIED WAVE INVERTERS


APPLICATIONS

	125W	250W	500W	1000W	1500W	2000W	2500W	3000W
Radio Laptop Phone charger	✓	✓	✓	✓	✓	✓	✓	✓
Television DVD player		✓	✓	✓	✓	✓	✓	✓
Electric drills Work lights			✓	✓	✓	✓	✓	✓
Power tools Coffee maker				✓	✓	✓	✓	✓
Microwave (>600W) Kettle					✓	✓	✓	✓
Large power tool Combination of appliances						✓	✓	✓
Small fridge Freezer Combination of appliances							✓	✓
Electric heaters Combination of appliances								✓

HEAVY-DUTY MODIFIED WAVE INVERTERS

- Input 10-16VDC or 22-33VDC to 230VAC 50Hz output
- Protected against over load, over temperature, low battery and short circuit
- Supplied with 1 or 2 standard UK 3-pin socket outlets, on/off switch

	PART NO.	WATTS	VAC	QUIESCENT CURRENT	QTY
12V	0-856-01	125W	230VAC	<0.25A	1
	0-856-02	250W	230VAC	<0.65A	1
	0-856-05	500W	230VAC	<0.95A	1
	0-856-10	1000W	230VAC	<0.45A	1
	0-856-16	1500W	110VAC	<0.40A	1
	0-856-15	1500W	230VAC	<0.60A	1
	0-856-22	2200W	230VAC	<1.2A	1
	0-856-30	3000W	230VAC	<1.0A	1
24V	0-856-51	125W	230VAC	<0.25A	1
	0-856-52	250W	230VAC	<0.65A	1
	0-856-55	500W	230VAC	<0.95A	1
	0-856-60	1000W	230VAC	<0.30A	1
	0-856-66	1500W	110VAC	<0.35A	1
	0-856-65	1500W	230VAC	<0.30A	1
	0-856-72	2200W	230VAC	<0.70A	1
	0-856-80	3000W	230VAC	<0.90A	1

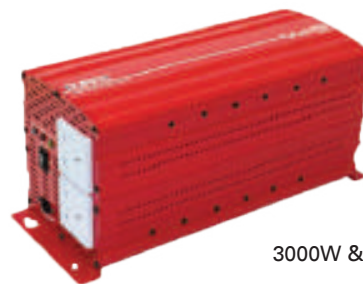

3000W & 2200W



1500W



1500W, 110VAC



1000W



500W



250W



125W



Remote control with 6m cable (0-856-97), with 5m cable (0-856-98) for 24V modified wave inverters.

SINE WAVE INVERTERS

COMPACT SINE WAVE INVERTER

ROBUST & POWERFUL

- 230VAC output
- LCD Panel Display with fault code reader / diagnostics (2000W, 2500W & 3000W only)
- 11-15.5VDC (Supports EURO 6 Requirements)
- Protected against overload, over temperature, low battery & short-circuits with warning light
- Fast USB charging 2.1A output
- Supplied with 2 x standard 3-pin BS1363 UK socket outlets, on/off/remote switch and remote control
- E-Marked, EMC, R10.05 approved



Light & compact



USB fast charging



High peak capacity for start-up demands



600W, 1000W, 1500W, 2000W, 2500W, 3000W



LCD display (excl. 600W)

PART NO.	WATTS	QUIESCENT CURRENT	VOLTAGE	QTY
0-857-60	600W	<0.85A	12V	1
0-857-10	1000W	≤1.0A	12V	1
0-857-16	1500W	≤1.0A	12V	1
0-857-20	2000W	≤1.0A	12V	1
0-857-25	2500W	≤1.5A	12V	1
0-857-30	3000W	≤1.5A	12V	1
0-857-66	1500W	≤0.7A	24V	1
0-857-75	2500W	≤1.0A	24V	1



2000W, 2500W & 3000W display



24V display



1000W & 1500W display



3000W, 2500W, 2000W



1500W, 2500W (24V)



1500W



1000W



600W

FULL TECHNICAL SPECIFICATIONS CAN BE FOUND ON PAGES 204–205.

HEAVY-DUTY SINE WAVE INVERTERS

- Range from 125W to 2700W
- Protected against overload, over temperature, low battery & short-circuits with warning light
- Supplied with up to 2 x standard 3-pin BS1363 UK socket outlet, on/off/remote switch
- E-Marked, EMC, R10 approved



PART NO.	WATTS	QUIESCENT CURRENT	VOLTAGE	CIGARETTE LIGHTER PLUG	QTY
0-857-01	125W	<0.6A	12V	Yes	1
0-857-02	250W	<0.8A	12V	-	1
0-857-05	500W	<0.9A	12V	-	1
0-857-08	800W	<1.3A	12V	-	1
0-857-15	1500W	<1.3A	12V	-	1
0-857-22	2200W	<1.5A	12V	-	1
0-857-27	2700W	<2A	12V	-	1
0-857-51	125W	<0.5A	24V	Yes	1
0-857-52	250W	<0.6A	24V	-	1
0-857-58	800W	<0.7A	24V	-	1
0-857-65	1500W	<0.7A	24V	-	1
0-857-72	2200W	<1.0A	24V	-	1
0-857-77	2700W	<1.5A	24V	-	1



2700W



2200W



1500W



800W



500W



250W



125W

POWER CONVERSION MODIFIED WAVE INVERTERS SPECIFICATIONS

12V MODIFIED WAVE INVERTERS SPECIFICATIONS

	0-856-01 (12V)	0-856-00 (12V)	0-856-02 (12V)	0-856-05 (12V)	0-856-10 (12V)	0-856-20 (12V)	0-856-16 (12V)
	Heavy-duty	Compact	Heavy-duty	Heavy-duty	Heavy-duty	Compact	Heavy-duty
OUTPUT POWER	125W	140W	250W	500W	1000W	1000W	1500W
OUTPUT SURGE (5 SEC)	450W	280W	1000W	1500W	2000W	2000W	3000W
AC OUTPUT V	230V	230V	230V	230V	230V	230V	110V
REGULATION	±10%	±5%	±10%	±10%	±5%	±10%	±5%
OUTPUT WAVEFORM	Modified	Modified	Modified	Modified	Modified	Modified	Modified
DC INPUT V	12-15V	10-15V	12-15V	12-15V	12-15V	11-15.5V	12-15V
LOW BATTERY ALARM	10.5V ± 0.5V	10V ± 0.5V	10.5V ± 0.5V	10.5V ± 0.5V	10.5V ± 0.5V	10.2V - 10.8V	10.5V ± 0.5V
LOW V SHUTDOWN	10V ± 0.5V	9.5V ± 0.5V	10V ± 0.5V	10V ± 0.5V	10V ± 0.5V	9.2V - 9.8V	10V ± 0.5V
FREQUENCY ±1%	50Hz	50Hz	50Hz	50Hz	50Hz	50Hz ± 3Hz	50Hz
EFFICIENCY	90%	85%	90%	90%	90%	85% Max	90%
NO-LOAD CURRENT	< 0.25A	< 0.45A	< 0.65A	< 0.95A	< 0.45A	< 0.35A	< 0.4A
OVERTEMP PROTECTION	55°C ± 5°C	60° ± 10°C	55°C ± 5°C	55°C ± 5°C	55°C ± 5°C	60° ± 5°C	55°C ± 5°C
COOLING FAN	No	No	Yes	Yes	Yes	Yes	Yes
OVERLOAD PROTECTION	Yes	Yes	Yes	Yes	Yes	Yes	Yes
SHORT CIRCUIT PROTECTION	Yes	Yes	Yes	Yes	Yes	Yes	Yes
DIMENSIONS (L X W X H)	138 x 240 x 76mm	160 x 70 x 70mm	158 x 240 x 76mm	303 x 240 x 76mm	363 x 240 x 76mm	238 x 165 x 69mm	408 x 240 x 76mm
NET WEIGHT	1.5Kg	0.428Kg	1.77Kg	3.16Kg	3.84Kg	1.701Kg	4.6Kg
APPROVALS	E-Marked	CE Marked, EMC	E-Marked	E-Marked	E-Marked	CE Marked, EMC, R10	E-Marked

	0-856-15 (12V)	0-856-25 (12V)	0-856-26 (12V)	0-856-41 (12V)	0-856-22 (12V)	0-856-30 (12V)	0-856-40 (12V)
	Heavy-duty	Compact	Compact	Compact	Heavy-duty	Heavy-duty	Compact
OUTPUT POWER	1500W	1500W	2000W	3000W	2200W	3000W	3000W
OUTPUT SURGE (5 SEC)	3000W	3000W	4000W	6000W	4400W	6000W	6000W
AC OUTPUT V	230V	230V	230V	110V	230V	230V	230V
REGULATION	±5%	±10%	±10%	±10%	±5%	±5%	±5%
OUTPUT WAVEFORM	Modified	Modified	Modified	Modified	Modified	Modified	Modified
DC INPUT V	12-15V	11-15.5V	11-15.5V	11-15V	10-16V	12-15V	11-15.5V
LOW BATTERY ALARM	10.5V ± 0.5V	10.2V - 10.8V	10.2V - 10.8V	10.5V ± 0.3V	11V ± 0.5V	11V ± 0.5V	10.2V - 10.8V
LOW V SHUTDOWN	10V ± 0.5V	9.2V - 9.8V	9.2V - 9.8V	9.5V ± 0.3V	10.5V ± 0.5V	10V ± 0.5V	9.2V - 9.8V
FREQUENCY ±1%	50Hz	50Hz ± 3Hz	50Hz	50Hz ± 3Hz	50Hz	50Hz	50Hz ± 3Hz
EFFICIENCY	90%	85% Max	85%	85%	90%	90%	85%
NO-LOAD CURRENT	< 0.6A	< 0.4A	< 0.5A	< 0.5A	< 1.2A	< 1A	< 0.6A
OVERTEMP PROTECTION	55°C ± 5°C	60° ± 5°C	60° ± 5°C	60° ± 5°C	55°C ± 5°C	55°C ± 5°C	60° ± 5°C
COOLING FAN	Yes	Yes	Yes	Yes	Yes	Yes	Yes
OVERLOAD PROTECTION	Yes	Yes	Yes	Yes	Yes	Yes	Yes
SHORT CIRCUIT PROTECTION	Yes	Yes	Yes	Yes	Yes	Yes	Yes
DIMENSIONS (L X W X H)	408 x 240 x 76mm	261 x 165 x 69mm	375 x 218 x 100mm	455 x 220 x 100mm	470 x 203 x 116mm	400 x 135 x 148mm	415 x 218 x 100mm
NET WEIGHT	4.6Kg	2.153Kg	5.375Kg	6.1Kg	4.9Kg	5.9Kg	6.1Kg
APPROVALS	E-Marked	CE Marked, EMC, R10	CE Marked, EMC, R10	RoHS	CE Marked, EMC	CE Marked, EMC	CE Marked, EMC, R10

POWER CONVERSION MODIFIED WAVE INVERTERS SPECIFICATIONS

24V MODIFIED WAVE INVERTERS SPECIFICATIONS

	0-856-51 (24V)	0-856-52 (24V)	0-856-55 (24V)	0-856-60 (24V)	0-856-70 (24V)	0-856-66 (24V)	0-856-65 (24V)
	Heavy-duty	Heavy-duty	Heavy-duty	Heavy-duty	Compact	Heavy-duty	Heavy-duty
OUTPUT POWER	125W	250W	500W	1000W	1000W	1500W	1500W
OUTPUT SURGE (5 SEC)	450W	1000W	1500W	2000W	2000W	3000W	3000W
AC OUTPUT V	230V	230V	230V	230V	230V	110V	230V
REGULATION	±10%	±10%	±10%	±5%	±10%	±5%	±5%
OUTPUT WAVEFORM	Modified	Modified	Modified	Modified	Modified	Modified	Modified
DC INPUT V	20-33V	20-33V	20-33V	20-33V	22-32.5V	20-33V	20-33V
LOW BATTERY ALARM	21V ± 1.0V	21V ± 1.0V	21V ± 1.0V	21V ± 1.0V	20.4V - 21.6V	21V ± 1.0V	21V ± 1.0V
LOW V SHUTDOWN	20V ± 1.0V	20V ± 1.0V	20V ± 1.0V	20V ± 1.0V	18.4V - 19.6V	20V ± 1.0V	20V ± 1.0V
FREQUENCY ±1%	50Hz	50Hz	50Hz	50Hz	50Hz ± 3Hz	50Hz	50Hz
EFFICIENCY	90%	90%	90%	90%	85% Max	90%	90%
NO-LOAD CURRENT	< 0.25A	< 0.65A	< 0.95A	< 0.3A	< 0.35A	< 0.35A	< 0.30A
OVERTEMP PROTECTION	55°C ± 5°C	55°C ± 5°C	55°C ± 5°C	55°C ± 5°C	60° ± 5°C	55°C ± 5°C	55°C ± 5°C
COOLING FAN	No	Yes	Yes	Yes	Yes	Yes	Yes
OVERLOAD PROTECTION	Yes	Yes	Yes	Yes	Yes	Yes	Yes
SHORT CIRCUIT PROTECTION	Yes	Yes	Yes	Yes	Yes	Yes	Yes
DIMENSIONS (L X W X H)	138 x 240 x 76mm	158 x 240 x 76mm	303 x 240 x 76mm	363 x 240 x 76mm	238 x 165 x 69mm	408 x 240 x 76mm	408 x 240 x 76mm
NET WEIGHT	1.5Kg	1.77Kg	3.16Kg	3.84Kg	1.686Kg	4.6Kg	4.6Kg
APPROVALS	E-Marked	E-Marked	E-Marked	E-Marked	CE Marked, EMC	E-Marked	E-Marked

	0-856-75 (24V)	0-856-76 (24V)	0-856-72 (24V)	0-856-80 (24V)
	Compact	Compact	Heavy-duty	Heavy-duty
OUTPUT POWER	1500W	2000W	2200W	3000W
OUTPUT SURGE (5 SEC)	3000W	4000W	4400W	6000W
AC OUTPUT V	230V	230V	230V	230V
REGULATION	± 10%	± 10%	± 5%	± 5%
OUTPUT WAVEFORM	Modified	Modified	Modified	Modified
DC INPUT V	22-32.5V	22-30V	20-33V	20-33V
LOW BATTERY ALARM	20.4V - 21.6V	20.4V - 21.6V	21V ± 1V	21V ± 1V
LOW V SHUTDOWN	18.4V - 19.6V	18.4V - 19.6V	20V ± 1V	20V ± 1V
FREQUENCY ±1%	50Hz ± 3Hz	50Hz ± 3Hz	50Hz	50Hz
EFFICIENCY	85% Max	85% Max	90%	90%
NO-LOAD CURRENT	< 0.4A	<0.5A	< 0.7A	< 0.9A
OVERTEMP PROTECTION	60° ± 5°C	60° ± 5°C	55°C ± 5°C	55°C ± 5°C
COOLING FAN	Yes	Yes	Yes	Yes
OVERLOAD PROTECTION	Yes	Yes	Yes	Yes
SHORT CIRCUIT PROTECTION	Yes	Yes	Yes	Yes
DIMENSIONS (L X W X H)	261 x 165 x 69mm	375 x 218 x 100mm	470 x 203 x 116mm	400 x 135 x 148mm
NET WEIGHT	2.133Kg	5.375Kg	4.9Kg	5.9Kg
APPROVALS	CE Marked, EMC	E-Marked	CE Marked, EMC	CE Marked, EMC

POWER CONVERSION SINE WAVE INVERTERS SPECIFICATIONS

12V SINE WAVE INVERTERS SPECIFICATIONS

	0-857-01 (12V) Heavy-duty	0-857-02 (12V) Heavy-duty	0-857-05 (12V) Heavy-duty	0-857-60 (12V) Compact	0-857-08 (12V) Heavy-duty	0-857-10 (12V) Compact	0-857-15 (12V) Heavy-duty
OUTPUT POWER	125W	250W	500W	600W	800W	1000W	1500W
OUTPUT SURGE (5 SEC)	375W	750W	1500W	1200W	1600W	2000W	3000W
AC OUTPUT V	230V	230V	230V	230V	230V	230V	230V
REGULATION	±3%	±3%	±3%	±10%	5%	±10%	±5%
OUTPUT WAVEFORM	Pure sine	Pure sine	Pure sine	Pure sine	Pure sine	Pure sine	Pure sine
DC INPUT V	12-15V	12-15V	12-15V	11-15.5V	10-16V	11V-15V	10-16.5V
LOW BATTERY ALARM	10.5V ± 0.5V	10.5V ± 0.5V	10.5V ± 0.5V	10.2V - 0.8V	10.5V ± 0.5V	10.5V ± 0.3V	10.5V ± 0.5V
LOW V SHUTDOWN	10V ± 0.5V	10V ± 0.5V	10V ± 0.5V	9.2V - 9.8V	10V ± 0.5V	9.5V ± 0.3V	10V ± 0.5V
HIGH V SHUTDOWN	16V ± 0.5V	16V ± 0.5V	16V ± 0.5V	16V ± 0.5V	16.0V ± 0.5V	15.5V ± 0.5V	16V ± 0.5V
FREQUENCY ±1%	50Hz	50Hz	50Hz	50Hz ±0.5Hz	50Hz	50Hz ± 1Hz	50Hz
EFFICIENCY	85%	85%	85%	85% Max	85%	85% Max	85%
NO-LOAD CURRENT	< 0.6A	< 0.8A	< 0.9A	< 0.85A	< 1.3A	≤1A	<1.3A
OVERTEMP PROTECTION	60°C ± 10°C	60°C ± 10°C	60°C ± 10°C	60°C ± 5°C	60°C ± 10°C	60°C ± 10°C	60°C ± 10°C
COOLING FAN	No	Yes	Yes	Yes	Yes	Yes	Yes
OVERLOAD ALARM	> 150W	> 300W	> 600W	> 690W	> 960W	Yes	> 1500W
OVERLOAD SHUTDOWN	150 ~ 195W	300 ~ 390W	600 ~ 780W	690W ~ 755W	960W ~ 1280W	1100W ~ 1350W	1500W ~ 1700W
RESET	1 ~ 5 sec	1 ~ 5 sec	1 ~ 5 sec	1 ~ 2 sec	1 ~ 5 sec	1 ~ 5 sec	1 ~ 5 sec
SHORT CIRCUIT PROTECTED	Yes	Yes	Yes	Yes	Yes	Yes	Yes
DIMENSIONS (L X W X H)	230 x 170 x 76mm	300 x 170 x 76mm	375 x 170 x 76mm	245 x 201 x 93.9mm	390 x 223 x 103mm	290 x 201 x 92.7mm	420 x 223 x 103mm
NET WEIGHT	1.91Kg	2.35Kg	3.12Kg	2.196Kg	6.18Kg	3.93Kg	6.2Kg
APPROVALS	CE EMC	CE EMC	CE EMC R10	CE EMC R10	CE EMC	CE EMC R10.05	CE EMC R10

	0-857-16 (12V) Compact	0-857-20 (12V) Compact	0-857-22 (12V) Heavy-duty	0-857-25 (12V) Compact	0-857-27 (12V) Heavy-duty	0-857-30 (12V) Compact
OUTPUT POWER	1500W	2000W	2200W	2500W	2700W	3000W
OUTPUT SURGE (5 SEC)	3000W	4000W	4400W	5000W	5400W	6000W
AC OUTPUT V	230V	230V	230V	230V	230V	230V
REGULATION	±10%	±10%	5%	±10%	5%	±10%
OUTPUT WAVEFORM	Pure sine	Pure sine	Pure sine	Pure sine	Pure sine	Pure sine
DC INPUT V	11V-15V	11V-15V	10-16V	11V-15V	10-15V	11V-15V
LOW BATTERY ALARM	10.5V ± 0.3V	10.5V ± 0.3V	10.5V ± 0.5V	10.5V ± 0.3V	10.5V ± 0.5V	10.5V ± 0.3V
LOW V SHUTDOWN	9.5V ± 0.3V	9.5V ± 0.3V	10V ± 0.5V	9.5V ± 0.3V	10V ± 0.5V	9.5V ± 0.3V
HIGH V SHUTDOWN	15.5V ± 0.5V	16V ± 0.3V	16V ± 0.5V	16V ± 0.3V	16V ± 0.5V	16V ± 0.3V
FREQUENCY ±1%	50Hz ±1Hz	50Hz ± 0.5Hz	50Hz	50Hz ± 0.5Hz	50Hz	50Hz ± 0.5Hz
EFFICIENCY	85% Max	85% Max	85%	85% Max	85%	85% Max
NO-LOAD CURRENT	≤1A	≤1A	< 1.5A	≤1.5A	< 2.0A	≤1.5A
OVERTEMP PROTECTION	60°C ± 10°C	60°C ± 10°C	60°C ± 10°C	60°C ± 10°C	60°C ± 10°C	60°C ± 10°C
COOLING FAN	Yes	Yes	Yes	Yes	Yes	Yes
OVERLOAD ALARM	Yes	Yes	> 2640W	Yes	> 3240W	Yes
OVERLOAD SHUTDOWN	1550W ~ 1700W	2050W ~ 2100W	2640W ~ 3540W	2550W ~ 2600W	3240W ~ 4320W	3050W ~ 3100W
RESET	1 ~ 5 sec	1 ~ 5 sec	1 ~ 5 sec	1 ~ 5 sec	1 ~ 5 sec	1 ~ 5 sec
SHORT CIRCUIT PROTECTED	Yes	Yes	Yes	Yes	Yes	Yes
DIMENSIONS (L X W X H)	325.8 x 201 x 92.7mm	495 x 270 x 139mm	480 x 289 x 100mm	495 x 270 x 139mm	540 x 289 x 100mm	495 x 270 x 139mm
NET WEIGHT	4.08Kg	9.70Kg	9.41Kg	10.57Kg	10.4Kg	10.55Kg
APPROVALS	CE EMC R10.05	CE EMC R10.05	CE EMC	CE EMC R10.05	CE EMC	CE EMC R10.05

POWER CONVERSION SINE WAVE INVERTERS SPECIFICATIONS

24V SINE WAVE INVERTERS SPECIFICATIONS

	0-857-51 (24V)	0-857-52 (24V)	0-857-58 (24V)	0-857-65 (24V)	0-857-66 (24V)	0-857-72 (24V)	0-857-75 (24V)
	Heavy-duty	Heavy-duty	Heavy-duty	Heavy-duty	Compact	Heavy-duty	Compact
OUTPUT POWER	125W	250W	800W	1500W	1500W	2200W	2500W
OUTPUT SURGE (5 SEC)	375W	750W	1600W	3000W	3000W	4400W	5000W
AC OUTPUT V	230V	230V	230V	230V	230V	230V	230V
REGULATION	±3%	±3%	5%	±5%	±10%	5%	±10%
OUTPUT WAVEFORM	Pure sine	Pure sine	Pure sine	Pure sine	Pure sine	Pure sine	Pure sine
DC INPUT V	20-33V	20-33V	20-33V	20-33V	22-30V	20-33V	22V-30V
LOW BATTERY ALARM	20.5V ± 1.0V	21V ± 1V	21V ± 1V	21V ± 1V	21V ± 0.4V	21V ± 1V	21V ± 0.4V
LOW V SHUTDOWN	20V ± 1.0V	20V ± 1V	20V ± 1V	20V ± 1V	19V ± 0.4V	20V ± 1V	19V ± 0.4V
HIGH V SHUTDOWN	32.V ± 1.0V	32V ± 1V	32V ± 1V	32V ± 1V	32V ± 0.4V	32V ± 1V	32V ± 0.4V
FREQUENCY ±1%	50Hz	50Hz	50Hz	50Hz	50Hz	50Hz	50Hz
EFFICIENCY	85%	85%	85%	85%	85%	85%	85%
NO-LOAD CURRENT	< 0.5A	< 0.6A	< 0.7A	0.7A	0.7A	< 1.0A	< 1.0A
OVERTEMP PROTECTION	60°C ± 10°C	60°C ± 10°C	60°C ± 10°C	60°C ± 10°C	60°C ± 10°C	60°C ± 10°C	60°C ± 10°C
COOLING FAN	No	Yes	Yes	Yes	Yes	Yes	Yes
OVERLOAD ALARM	> 150W	> 300W	> 960W	> 1500W	> 1500W	> 2640W	> 2500W
OVERLOAD SHUTDOWN	150 ~ 195W	300 ~ 390W	960W ~ 1280W	1500W ~ 1700W	1500W ~ 1800W	2640W ~ 3540W	2660W ~ 2850W
RESET	1 ~ 5 sec	1 ~ 5 sec	1 ~ 5 sec	1 ~ 5 sec	1 ~ 5 sec	1 ~ 5 sec	1 ~ 5 sec
SHORT CIRCUIT PROTECTED	Yes	Yes	Yes	Yes	Yes	Yes	Yes
DIMENSIONS (L X W X H)	230 x 170 x 76mm	300 x 170 x 76mm	390 x 223 x 103mm	420 x 223 x 103mm	374 x 210 x 101mm	480 x 289 x 100mm	495 x 270 x 139mm
NET WEIGHT	1.91Kg	2.35Kg	6.18Kg	6.2Kg	4.5Kg	9.4Kg	10.6Kg
APPROVALS	CE EMC	CE EMC	CE EMC	CE EMC R10	E-Marked EMC R10.06	CE EMC	E-Marked EMC R10.06

	0-857-77 (24V)
	Heavy-duty
OUTPUT POWER	2700W
OUTPUT SURGE (5 SEC)	5400W
AC OUTPUT V	230V
REGULATION	5%
OUTPUT WAVEFORM	Pure sine
DC INPUT V	20-33V
LOW BATTERY ALARM	21V ± 1V
LOW V SHUTDOWN	20V ± 1V
HIGH V SHUTDOWN	32V ± 1V
FREQUENCY ±1%	50Hz
EFFICIENCY	85%
NO-LOAD CURRENT	< 1.5A
OVERTEMP PROTECTION	60°C ± 10°C
COOLING FAN	Yes
OVERLOAD ALARM	> 3240W
OVERLOAD SHUTDOWN	3240W ~ 4320W
RESET	1 ~ 5 sec
SHORT CIRCUIT PROTECTED	Yes
DIMENSIONS (L X W X H)	540 x 289 x 100mm
NET WEIGHT	10.4Kg
APPROVALS	CE EMC

VOLTAGE CONVERTERS

24V TO 12V

A range of 24V to 12V voltage converters featuring silicon encapsulated components in a proven design, for reliability and low quiescent current. Type approved to 72/245/EEC as amended by 95/54/EEC, e11.

1.5A CONTINUOUS, 2A INTERMITTENT LOAD



- For radio
- Linear construction

PART NO.	DESCRIPTION	QTY
0-578-00	Non-isolated return switch mode	1

5A CONTINUOUS, 7A INTERMITTENT LOAD



- For radios & phones

PART NO.	DESCRIPTION	QTY
0-578-05	Isolated return switch mode	1
0-578-55	40mA output Isolated return switch mode	1

10A CONTINUOUS, 15A INTERMITTENT LOAD



- For most applications including heavy-duty communications

PART NO.	DESCRIPTION	QTY
0-578-10	Isolated return switch mode	1

22A CONTINUOUS, 28A INTERMITTENT LOAD



- For most applications including heavy-duty communications

PART NO.	DESCRIPTION	QTY
0-578-22	Isolated return switch mode	1

12V TO 24V

12V to 24V voltage converter featuring silicon encapsulated components in a proven design, for reliability and low quiescent current. Type approved to 72/245/EEC as amended by 95/54/EEC.

10A CONTINUOUS, 15A INTERMITTENT



- Quiescent current consumption 190mA
- L 150 x W 85 x H 38mm

PART NO.	DESCRIPTION	QTY
0-578-20	Non-isolated return switch mode	1

POWER CONVERSION VOLTAGE CONVERTERS 12V TO 24V & 24V TO 12V

24V TO 12V

A range of 24 to 12V voltage converters of a reliable established design, featuring the latest technology to give high conversion efficiency, typically greater than 85%, low quiescent current, and excellent reliability. Installed with a single, clip-on bracket. CE, EMC, e11, e13 and ISO approved for automotive applications.

3A CONTINUOUS, 6A INTERMITTENT LOAD

- For radios, CD players and mobile telephones



PART NO.	DESCRIPTION	QTY
0-578-03	Non-isolated return switch mode	1

6A CONTINUOUS, 10A INTERMITTENT LOAD

- For radio, CD players and mobile telephones



PART NO.	DESCRIPTION	QTY
0-578-06	Non-isolated return switch mode	1
0-578-56	Isolated return version switch mode	1

12A CONTINUOUS, 18A INTERMITTENT LOAD

- Switch mode non-isolated return
- For multiple applications or some high power audio systems

PART NO.	DESCRIPTION	QTY
0-578-12	Non-isolated return switch mode	1



18A CONTINUOUS, 21A INTERMITTENT LOAD

- For multiple applications or high power audio systems



PART NO.	DESCRIPTION	QTY
0-578-18	Non-isolated return switch mode	1

24A CONTINUOUS, 30A INTERMITTENT LOAD

- For high power audio systems and high frequency radio transmission
- Meeting Petroleum Institute recommendations



PART NO.	DESCRIPTION	QTY
0-578-24	Non-isolated return switch mode	1
0-578-74	Isolated return version switch mode	1



@ WWW.DURITE.CO.UK

+44 (0) 1255 555 200

✉ SALES@DURITE.CO.UK

POWER CONVERSION VOLTAGE CONVERTERS 24V TO 12V & SPECIFICATIONS

VOLTAGE CONVERTERS SPECIFICATIONS

	MODEL 0-578-XX	00	05	55	10	22	20	03	06	12	18	24	56	74
TYPE	LINEAR, NON-ISOLATED RETURN	•												
	SWITCH MODE, ISOLATED RETURN		•	•	•	•							•	•
	SWITCH MODE, NON-ISOLATED RETURN						•	•	•	•	•	•		
LOAD	CONTINUOUS A	1.5	5	5	10	22	10	3	6	12	18	24	6	24
	INTERMITTENT A	2	7	7	15	28	15	6	10	18	21	30	10	30
QUIESCENT CURRENT MILLI-AMPS		6	100	350	100	120	110	15	15	15	15	15	15	15
INPUT VOLTAGE VDC		20-32 VDC												
OUTPUT VOLTAGE VDC		½ THE INPUT VOLTAGE					24V ±5%	13.6 VDC +15% -20% REGULATED						
EMC		TYPE APPROVED TO 72/245/EEC AS AMENDED IN 95/94/EC, e11						CE, e11, e13, 2006/96/EC, 2004/108/EC, 93/68/EEC, VIDG5 AES						
PROTECTION	OVERCURRENT	•	•	•	•	•	•	•	•	•	•	•	•	•
	OVERHEAT	•	•	•	•	•	•	•	•	•	•	•	•	•
	OVERVOLTAGE							•	•	•	•	•	•	•
	TRANSIENTS	•	•	•	•	•	•	•	•	•	•	•	•	•
	REVERSE CONNECTION							•	•	•	•	•	•	•
DIMENSIONS	LENGTH (MM)	85	95	95	150	180	150	68	88	126	166	166	126	218
	WIDTH (MM)	100	85	85	85	123	85	87	87	87	87	87	87	87
	HEIGHT (MM)	30	46	46	46	46	38	50	50	50	50	50	50	50
	WEIGHT (G)	220	465	465	726	1240	520	205	260	410	600	600	500	600

06

EQUIPMENT & ACCESSORIES



**VAST RANGE OF
ACCESSORIES
COVERING 12V AND
24V APPLICATIONS.**

SPLIT CHARGING	210
POWER PLUGS & SOCKETS.....	214
TRAILER PLUGS.....	217
GAUGES	222
RETRACTABLE CABLES.....	227
WIPER BLADES & EQUIPMENT.....	230
HORNS	236
FANS	238
SPEAKERS	239
AERIALS.....	239
OIL & FUEL PUMPS.....	240

SPLIT CHARGING VOLTAGE SENSITIVE RELAYS

VOLTAGE SENSITIVE RELAY

PROGRAMMABLE, 12V, 200A



9 programmes



LED programme
indication



12V



“ 200A smart relay. ”




12V, 200A



Suitable for split charging

SMART CAPABILITIES NOW ALLOW FOR USE WITH THE LATEST RANGE OF VEHICLES FITTED WITH SMART ALTERNATORS AND REGENERATIVE BRAKING SYSTEMS

- 12V, 200A capacity
- Microprocessor control with 9 available programmes
- Manual override function
- Suitable for split charging or battery saving duties
- L 45.9 x W 45.9 x H 77.6mm

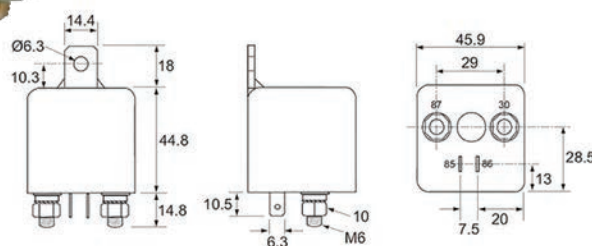


PART NO.	DESCRIPTION	QTY
0-727-43	12V	1

VOLTAGE SENSITIVE RELAY, 140A WITH RED LED INDICATOR



The Durite Voltage Sensitive relay allows split charging of second battery bank without discharging the primary/start battery. They are available in both 12V and 24V.

- 12V sensitive relay. Relay makes at 13.3V and breaks at 12.65V
- 24V sensitive relay. Relay makes at 27.4V and breaks at 25.6V
- L 68 x W 54 x H 68mm
- CE approved

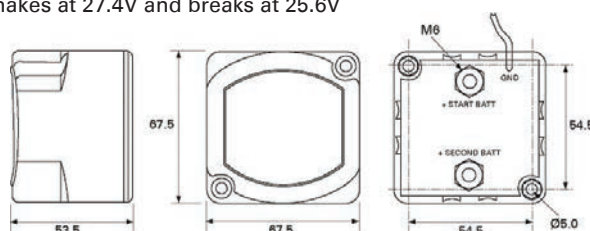

PART NO.	DESCRIPTION	QTY
0-727-33	12V	1
0-727-83	24V	1

 Additional information:

A 5 second delay operates when the voltage falls below the cut-out voltage to prevent nuisance cut-out due to high intermittent loads on the battery. Supplied with self tapping screws and ring crimp terminal for ground lead.


EQUIPMENT & ACCESSORIES SPLIT CHARGING ELECTRONIC SPLIT CHARGERS

SPLIT CHARGE RELAYS

70/20A SPLIT CHARGE RELAY

- 12V, 70/20A. Isolates fridge circuit separately
- 2 x 2.8mm, 1 x 6.3mm and 2 x 9.5mm terminals
- Replaces Lucas SRB 630

PART NO.	QTY
0-727-23	1



ELECTRONIC SPLIT CHARGERS

“
Designed to work
with stop-start
technology.
”

UNIVERSAL SPLIT CHARGERS

12VDC TO 12VDC
OR 24VDC TO 12VDC, 30A



12VDC to 12VDC or
24VDC to 12VDC



30A



3 stage micro
processor



Compatible



**USING INTELLIGENT SOFTWARE TO
CONTROL THE MICROPROCESSOR, THE
DURITE UNIVERSAL SPLIT CHARGER
AUTOMATICALLY CONTROLS THE CHARGING
OF A SECONDARY OR AUXILIARY BATTERY.**

- Monitor the voltage and ensure the battery is charged in the most efficient manner once the main battery is fully charged
- Designed to be compatible with EURO6 vehicles and all those fitted with smart alternators
- Supplied with 500mm flying leads
- CE, EMC R10

PART NO.	DESCRIPTION	QTY
0-852-62	12VDC to 12VDC 30A split charger	1
0-852-72	24VDC to 12VDC 30A split charger	1

EQUIPMENT & ACCESSORIES SPLIT CHARGING ELECTRONIC SPLIT CHARGERS

ELECTRONIC SPLIT CHARGER

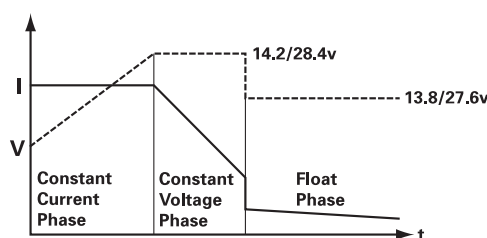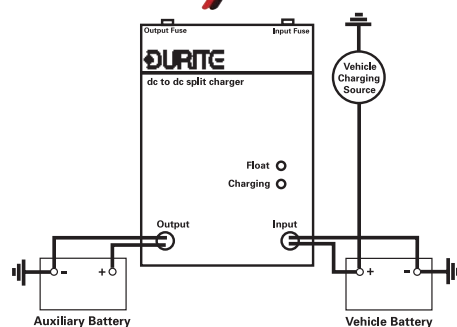

The Durite electronic split charger uses the latest technology to produce a split charging capability that allows an auxiliary battery system to be independently charged from a vehicle system.

- Microprocessor controlled
- Automatic 3 stage charging:
Constant current, constant voltage and float
- Charge status LED indication
- Reverse polarity protection
- Short circuit protection
- Auto cut in and drop out
- Isolates different voltage systems
- Output controlled to maximum current
- Can be permanently connected
- Will not discharge the vehicles batteries

🔧 For Euro 6 vehicles see part no. 0-852-62, 0-852-72.

PART NO.	DESCRIPTION	QTY
0-852-50	24VDC to 12VDC 20A split charger	1
0-852-51	12VDC to 24VDC 10A split charger. Will not charge the 24V battery until the 12V batteries are charged or being charged	1
0-852-52	12VDC to 12VDC 20A split charger	1
0-852-53	24VDC to 24VDC 10A split charger	1

BATTERY ISOLATORS

VOLTAGE SENSITIVE BATTERY ISOLATOR RELAY, 12V 80A WITH RED LED INDICATOR



Voltage sensitive battery isolator relay, with red LED indicator.
Automatically disconnects non essential loads from the battery to prevent start battery being discharged, can be manually overridden.

PART NO.	DESCRIPTION	QTY
0-727-35	12V 80A. Relay makes at 12.8V and breaks at 11.0V. Current draw, contact open 8mA, contacts closed 320mA. L 68 x W 54 x H 68mm. CE approved.	1

EQUIPMENT & ACCESSORIES SPLIT CHARGING BATTERY ISOLATORS

12/24V, SOLID STATE BATTERY GUARD



12/24V, solid state battery guard, monitors the battery voltage and disconnect load when the battery voltage reaches a pre-determined level. The voltage level at which the device operates to disconnect or reconnect the load to the battery can be set to one of 10 different programmes by the installer using a simple bridge and integral LED indicator. The unit also has an alarm circuit to power an audio and/or visual indicator to warn of imminent disconnect, allowing the operator 50 secs to rectify the situation before disconnecting. A 10 second delay is built in prior to an alarm, to prevent spurious warnings. The alarm circuit is limited to 500mA maximum, if a higher current is required a relay with a diode must be used, 0-727-14 for 12V and 0-727-26 for 24V.

- Quiescent current is below 10mA for all versions
- Appropriate terminals and insulating covers are provided with each unit
- Protected to IP65
- ECE and CE approved


Pre-programmed voltage settings:

12V		24V	
DISCONNECT	CONNECT	DISCONNECT	CONNECT
10.5V	12.0V	21.0V	24.0V
10.0V	11.5V	20.0V	23.0V
9.5V	11.5V	19.0V	23.0V
11.0V	13.5V	22.5V	26.5V
11.5V	13.5V	23.0V	27.5V
10.5V	12.5V	21.0V	25.0V
11.5V	12.5V	23.0V	25.5V
11.0V	12.5V	23.5V	25.5V
12.0V	13.0V	24.0V	26.0V
10.0V	13.0V	20.0V	26.5V

PART NO.	DESCRIPTION	QTY
0-852-02	20A in-line version, L 155 x W 30 x H 15mm	1
0-852-04	40A version, with provision for external on/off switch L 76 x W 78 x H 33mm	1
0-852-10	100A version with provision for external on/off switch and override switch L 124 x W 97 x H 51mm	1



FOR MORE INFO, VISIT WWW.DURITE.CO.UK
OR CONTACT INFO@DURITE.CO.UK



PLUGS & SOCKETS

POWER PLUGS

VOLTMETER & TRIPLE USB PORT



- 12/24V
- Quick charge 3.0, 5V
- 2x 2.1A ports and 1x 3A QC port

PART NO.	DESCRIPTION	QTY
0-601-12	3-port 2.1A USB with voltmeter	1

TRIPLE USB PORT



- 12/24V
- Quick charge 3.0, 5V
- 2x 2.4A ports and 1x 3.0A QC port

PART NO.	DESCRIPTION	QTY
0-601-13	USB port socket	1

USB PORT & DOUBLE ADAPTOR



- 12V
- 4 LED supply voltage indication
- Internal 10A fuse

PART NO.	QTY
0-601-92	1

12V PLUG - DOUBLE ADAPTOR



- Plug supplying a double socket
- 10A maximum at 12V

PART NO.	QTY
0-601-90	1

DIN PLUG/ANGLED DIN PLUG



- 16A maximum

PART NO.	DESCRIPTION	QTY
0-601-26	DIN plug	1
0-601-27	Angled DIN plug	1

PLUG WITH GREEN LED INDICATOR



- Fits most cigarette lighter sockets with red adapter, or DIN socket with the red adapter removed
- Internal 8A fuse

PART NO.	QTY
0-601-16	1

ILLUMINATED CIGARETTE PLUG



- Fits 28mm diameter hole
- Supplied with bulb

PART NO.	DESCRIPTION	QTY
0-601-00	12V, amber	1
0-601-24	24V, green	1

RETRACTABLE CABLE - 1 PLUG



- Rated at 5A, 12V for continuous use
- 2.45m

PART NO.	QTY
0-601-50	1

RETRACTABLE CABLE - PLUG & SOCKET



- Rated at 5A, 12V for continuous use
- 2.45m

PART NO.	QTY
0-601-55	1

EQUIPMENT & ACCESSORIES CIGARETTE LIGHTERS POWER SOCKETS & ACCESSORIES

POWER SOCKETS

VOLTMETER ILLUMINATED, 28MM

- Voltmeter
- LCD Display
- Fits 28mm panel socket



PART NO.	DESCRIPTION	QTY
0-534-10	Single 6-30V	1
0-534-05	Dual 12/24/48V	1

USB PORT FOR PANEL MOUNT

- 12/24V
- Voltmeter
- 3.0 USB
- 1x 3.0A QC port and 1x C type charge port
- Black ABS plastic
- For 29.2mm diameter panel hole



PART NO.	QTY
0-534-15	1

USB PORT SOCKET 12/24V

- Two USB ports, output 5V 3.1ADC total
- Black ABS plastic
- For 28mm diameter panel hole



PART NO.	QTY
0-601-08	1

USB PORT SOCKET

- 12/24V
- 3.1A 5V USB socket
- Black ABS plastic
- 2 x 6.3mm male blade terminals



🔧 **Compatible with LED Modular Rocker Switches on page108.**

PART NO.	QTY
0-790-00	1

12V POWER SOCKET

- 36.5mm diameter
- For 28mm diameter panel hole



PART NO.	QTY
0-601-07	1

20A POWER SOCKET

- For 28mm panel hole
- 20A maximum



PART NO.	QTY
0-601-01	1

POWER SOCKET WITH BRACKET

- Power socket with cover and bracket
- 100mm flying leads
- 15A maximum



PART NO.	QTY
0-601-11	1

10A POWER SOCKET

- Power socket with cover
- For 28mm panel hole
- 100mm flying leads
- 10A maximum



PART NO.	QTY
0-601-03	1

12V CIGARETTE SOCKET

- For 28mm diameter panel hole
- 36.6mm diameter
- Black cover



PART NO.	QTY
0-601-09	1

SPRING LOADED CAP DIN SOCKET

- For 18mm diameter panel hole
- 16A maximum
- ISO 4165



PART NO.	QTY
0-601-29	1

DIN SOCKET

- For 18mm diameter panel hole
- 16A maximum
- ISO 4165



PART NO.	QTY
0-601-19	1

EQUIPMENT & ACCESSORIES PLUGS & SOCKETS POWER SOCKETS & ACCESSORIES

THREE DIN SOCKET PANEL



Three DIN sockets on a panel for dashboard installation into a panel hole 70 x 20mm.

- Supplied with fixing screws
- 16A maximum
- ISO 4165

PART NO. QTY

0-601-54	1
----------	---

SURFACE MOUNTING DIN SOCKET



- Supplied with two fixing screws
- 16A maximum
- ISO 4165

PART NO. QTY

0-601-69	1
----------	---

ACCESSORIES

RETRACTABLE CABLE



- 2.45 metres working length
- 2 x 24/0.20mm
- PVC insulated
- Sheathed in black polyethylene
- Rated at 6A, 12V for continuous use

PART NO. QTY

0-601-06	1
----------	---

ACCESSORY POWER SOCKET



- Accessory power socket with cigarette lighter socket
- 250mm cable and crocodile clips
- Rated at 5A at 12V for continuous use

PART NO. QTY

0-601-91	1
----------	---

BRACKETS



- Bracket for power sockets

PART NO. DESCRIPTION QTY

0-608-00	For 28mm sockets	1
0-608-01	For 18mm sockets	1

FRONT PANEL, 28MM HOLE



For fitments of 28mm diameter sockets.

PART NO. DESCRIPTION QTY

0-601-51	1-hole panel	1
0-601-57	2-hole panel	1

REAR PANEL, 28MM HOLE



For fitments of 28mm diameter sockets.

PART NO. DESCRIPTION QTY

0-601-52	1-hole panel	1
0-601-58	2-hole panel	1

MOUNTING HOUSING, 28MM



For fitments of 28mm diameter sockets.

PART NO. DESCRIPTION QTY

0-601-61	1-hole panel	1
0-601-62	2-hole panel	1

TRAILER PLUGS

12V PLUGS AND SOCKETS

ISO1724 7-PIN PLUGS & SOCKETS (12N)

Socket



N type connector:

Regular connector which supplies all trailer & caravan road lighting from 12V towing vehicle (excluding reverse).

- Complies with ISO1724
- Lighting connections between traction vehicle and trailer

Plug



METAL		
PART NO.	DESCRIPTION	QTY
0-692-16	7-pin plug	5
5-692-16	7-pin plug	1
0-692-19	Socket with cover	5
5-692-19	Socket with cover	1
0-692-09	Socket with fog lamp cut out	5
5-692-09	Socket with fog lamp cut out	1

PLASTIC		
PART NO.	DESCRIPTION	QTY
0-693-16	7-pin plug	5
5-693-16	7-pin plug	1
0-693-19	Socket with cover	5
5-693-19	Socket with cover	1
0-693-09	Socket with fog lamp cut out	5
5-693-09	Socket with fog lamp cut out	1
0-693-90	Trailing socket	1

ISO3732 7-PIN PLUGS & SOCKETS (12S)

Metal



S type connector:

Auxiliary connector which supplies all trailer & caravan power to 12V appliances (fridges, interior lights & charging systems) from towing vehicle.

- Complies with ISO3732
- Electrical connections between traction vehicle and trailer

Plastic



METAL		
PART NO.	DESCRIPTION	QTY
0-692-66	7-pin plug	5
5-692-66	7-pin plug	1

PLASTIC		
PART NO.	DESCRIPTION	QTY
0-693-66	7-pin plug	5
5-693-66	7-pin plug	1
0-693-69	Socket with cover	5
5-693-69	Socket with cover	1

3-PIN PLUG & SOCKET



- Complies with DIN 9680
- Suitable for use on agricultural vehicles

PART NO.	DESCRIPTION	QTY
0-365-16	Non-reversible plug	1
0-365-19	Non-reversible socket	1

ISO11446 13-PIN PLUGS & SOCKETS



Road lights & auxiliary connector which supplies all power to 12V caravan (charging batteries and road lights).

- Lighting & auxiliary connections between traction vehicle and caravan
- Splash protected to ISO4091
- Complies with ISO11446

PART NO.	DESCRIPTION	QTY
0-695-16	13-pin plug	1
0-695-19	Socket with cover	1
0-695-09	Socket with fog lamp cut out	1
0-695-90	Trailing Socket	1

EQUIPMENT & ACCESSORIES TRAILER PLUGS 12V & 24V PLUGS & SOCKETS

13-PIN ADAPTORS

7-pin socket (12N) to 13-pin plug.

- Splash protected to ISO4091

PART NO.	QTY
0-695-66	1



13-pin socket to 7-pin plug (12N).

PART NO.	QTY
0-695-69	1



13-pin plug to 2 x 7-pin sockets (12N + 12S), 400mm cable.

PART NO.	QTY
0-695-67	1



24V PLUGS AND SOCKETS

ISO1785 7-PIN PLUGS & SOCKETS (24N)

N type connector:

Regular connector which supplies all trailer road lighting from 24V towing vehicle (excluding reverse).

- Complies with ISO1185
- Lighting connections between traction vehicle and trailer



Clang Metal

PART NO.	DESCRIPTION	QTY
0-477-16	Plug with cover	1
0-477-19	Socket	1



Alloy

PART NO.	DESCRIPTION	QTY
0-477-86	Plug with cover	1
0-477-89	Socket	1



Plastic

PART NO.	DESCRIPTION	QTY
0-477-26	Plug with cover	1
0-477-29	Socket	1

ISO3731 7-PIN PLUGS & SOCKETS (24S)

S type connector:

Auxiliary connector which supplies all 24V trailer power to appliances & charging systems from towing vehicle.

- Complies with ISO3731
- Electrical connections between traction vehicle and trailer



Clang Metal

PART NO.	DESCRIPTION	QTY
0-477-66	Plug with cover	1
0-477-69	Socket	1



Alloy

PART NO.	DESCRIPTION	QTY
0-477-96	Plug with cover	1
0-477-99	Socket	1



Plastic

PART NO.	DESCRIPTION	QTY
0-477-76	Plug with cover	1
0-477-79	Socket	1

SINGLE PIN 24V PLUGS & SOCKETS

Clang single pin plugs and sockets.

Rated at 300A continuous for 3 hours or 400A intermittently. Passivated zinc alloy case, silver plated pins and socket tubes.



PART NO.	DESCRIPTION	QTY
0-477-39	Single pin socket	1



PART NO.	DESCRIPTION	QTY
0-477-36	Single pin plug	1



PART NO.	DESCRIPTION	QTY
0-477-56	Single pin plug	1



PART NO.	DESCRIPTION	QTY
0-477-59	Single pin socket	1

EQUIPMENT & ACCESSORIES TRAILER PLUGS 24V PLUGS & SOCKETS

3-PIN 24V PLUGS AND SOCKETS

Clang three pin heavy-duty plug and sockets.

Passivated zinc alloy case, nickel plated brass pins and socket tubes. Rated at 25A continuous and 45A intermittently.



PART NO.	DESCRIPTION	QTY
0-477-49	3-pin socket	1



PART NO.	DESCRIPTION	QTY
0-477-46	3-pin plug	1

Clang three pin plug and sockets.

Nickel plated brass case, self colour pins and socket tubes. Rated at 5A continuous.



PART NO.	DESCRIPTION	QTY
0-473-19	3-pin socket	1



PART NO.	DESCRIPTION	QTY
0-473-16	3-pin plug	1

5-PIN & 7-PIN 24V ABS AND EBS

Five or seven pin plugs and sockets for ABS and EBS systems.

Thermoplastic body, nickel plated brass pins and socket tubes with screw terminals and stainless steel locking clamp. ABS to ISO7638.



PART NO.	DESCRIPTION	QTY
0-478-19	5-pin socket	1
0-478-29	7-pin socket	1
0-478-16	5-pin plug	1
0-478-26	7-pin plug	1

10-PIN 24V PLUGS AND SOCKETS

Clang plugs and sockets for 24V trailers.

Passivated zinc alloy case, nickel plated brass pins and socket tubes.



PART NO.	DESCRIPTION	QTY
0-480-19	10-pin socket	1



PART NO.	DESCRIPTION	QTY
0-480-16	10-pin plug	1

7 AND 15-PIN 24V ADAPTERS



15-pin plug adapter, 15-pin socket to 2 x 7-pin plugs (24N and 24S) to ISO12098. Additional 3 data wires are installed but not connected.

PART NO.	QTY
0-479-67	1

15-PIN 24V PLUGS AND SOCKETS

Fifteen pin plugs and sockets for 24V trailers.

Thermoplastic body, nickel plated brass pins and socket tubes with screw terminals and stainless steel locking clamp to ISO12098.



PART NO.	DESCRIPTION	QTY
0-479-19	15-pin socket	1



PART NO.	DESCRIPTION	QTY
0-479-16	15-pin plug	1

24V TO 12V ADAPTERS

**Lighting adaptor.**

- Input 24V 7-pin plug (24N), Output 12V
- Max load 60W

PART NO.	DESCRIPTION	QTY
0-477-07	7-pin (12N) socket output	1
0-477-13	13-pin socket output	1

EQUIPMENT & ACCESSORIES TRAILER PLUGS

UNIVERSAL PLUGS AND SOCKETS

IP68 HEAVY-DUTY WATERPROOF PLUGS & SOCKETS 32A

Plug



Trailing socket



Surface mount socket



Connectors for cables between 7 and 15mm diameter.
Polyamide bodies with nickel plated brass contacts for cables between 7 and 15mm diameter.

- Screw terminals
- Rated at 32A at 600V AC or DC
- Supplied with cap

PLUG		
PART NO.	DESCRIPTION	QTY
0-462-26	2-pin	1
0-463-26	3-pin	1
0-464-26	4-pin	1
0-465-26	7-pin, 430V AC or DC	1

TRAILING SOCKET		
PART NO.	DESCRIPTION	QTY
0-462-29	2-pin	1
0-463-29	3-pin	1
0-464-29	4-pin	1
0-465-29	7-pin, 430V AC or DC	1

SURFACE MOUNT SOCKET		
PART NO.	DESCRIPTION	QTY
0-462-79	2-pin	1
0-463-79	3-pin	1
0-464-79	4-pin	1
0-465-79	7-pin, 430V AC or DC	1

IP68 WATERPROOF PLUGS & SOCKETS 10A

Plug



Trailing socket



Surface mount socket



Connectors for cables between 6 and 8mm diameter.
Glass filled polyamide bodies with nickel plated brass contacts for cables between 6 and 8mm diameter.

- Screw terminals

- Rated at 10A at 250V AC or DC for 2 and 3-pin products, 6A for 4-pin products and 3A for 7-pin products
- Supplied with covers (which doubles as an assembly tool)

PLUG		
PART NO.	DESCRIPTION	QTY
0-462-16	2-pin	1
0-463-16	3-pin	1
0-464-16	4-pin	1
0-465-16	7-pin	1
0-465-99	Cable gland for 7 - 9mm diameter, yellow	10

TRAILING SOCKET		
PART NO.	DESCRIPTION	QTY
0-462-19	2-pin	1
0-463-19	3-pin	1
0-464-19	4-pin	1
0-465-19	7-pin	1
0-465-99	Cable gland for 7 - 9mm diameter, yellow	10

SURFACE MOUNT SOCKET		
PART NO.	DESCRIPTION	QTY
0-462-69	2-pin	1
0-463-69	3-pin	1
0-464-69	4-pin	1
0-465-69	7-pin	1



Durite offers an extensive range of Equipment & Accessories. These include gauges, lighter, DIN, 12V and 24V plugs & sockets, windscreen wiper equipment, fans and horns.

EQUIPMENT & ACCESSORIES TRAILER PLUGS ACCESSORIES

ACCESSORIES

BRACKET ASSEMBLIES



Trailer socket bracket with 12V 7-pin socket and 1 metre of 7 core cable.

PART NO.	DESCRIPTION	QTY
0-289-00	Metal socket	1
0-289-01	Plastic socket	1



Trailer socket bracket with 12V 13-pin plastic socket and 1 metre of 13 core cable.

PART NO.	QTY
0-289-53	1



Nuts and bolts for trailer sockets. 2BA x 1.25" round head machine screws and nuts.

PART NO.	QTY
0-590-00	50

TRAILER SOCKET BRACKETS



16swg galvanised mild steel.

PART NO.	DESCRIPTION	QTY
0-521-00	7-pin single	1
0-521-03	13-pin single	1

ACCESSORIES FOR 12V RANGE



Caravan socket gasket for 7-pin sockets.

PART NO.	DESCRIPTION	QTY
0-693-99	Caravan 7-pin socket gasket	10
5-693-99	Single unit, as above	1



12V 13-pin Plug Holder/Centraliser. Splash protected to ISO 4091.

PART NO.	QTY
0-695-99	10



Caravan socket gasket for 13-pin sockets. For use with 0-692-19 & 0-692-09 & 0-692-69.

PART NO.	QTY
0-693-98	10
5-693-98	1

ACCESSORIES FOR 24V RANGE



PART NO.	DESCRIPTION	QTY
0-525-03	Cover for the rear of the Clang range of metal plugs	10
0-477-03	Cover for the rear of the plastic 24V plugs	10
0-474-00	Parking bracket for trailing plugs or sockets. Passivated steel	1

CABLE JOINER



PART NO.	DESCRIPTION	QTY
0-463-00	3-pin cable joiner, 16A rating	1
0-465-99	Gland for 7 - 9mm diameter yellow cable	10

GAUGES

RANGE 1 - SPORTS / PREMIUM

A range of illuminated 52mm electrical dashboard gauges. Matt black bezels and white figures. Bridge type fitting.

BATTERY CONDITION VOLTMETER, 90° SWEEP DIAL



PART NO.	DESCRIPTION	QTY
0-523-22	12V voltmeter	1
0-523-72	24V voltmeter, scale 18 - 32V	1

AMMETER, 90° SWEEP DIAL



PART NO.	DESCRIPTION	QTY
0-523-01	30-0-30A ammeter	1
0-523-51	60-0-60A ammeter	1

WATER TEMPERATURE GAUGE, 90° SWEEP DIAL



- Supplied with 1/8" NPTF sender

PART NO.	DESCRIPTION	QTY
0-523-23	12V gauge	1
0-523-73	24V gauge	1
0-523-93	Replacement sender	1

OIL TEMPERATURE GAUGE, 90° SWEEP DIAL



- Supplied with 1/8" NPTF sender

PART NO.	DESCRIPTION	QTY
0-523-15	12V gauge	1
0-523-65	24V gauge	1
0-523-95	Replacement sender	1

REPLACEMENT ILLUMINATION LAMP

Replacement 12V and 24V illumination lamp for:
0-523-22, 0-523-23, 0-523-15, 0-523-16,
0-523-06, 0-523-72, 0-523-73, 0-523-65
and 0-523-66.

PART NO.	DESCRIPTION	QTY
0-523-92	Replacement 24V illumination lamp	1
0-523-91	Replacement 12V illumination lamp	1

OIL PRESSURE GAUGE, 90° SWEEP DIAL



- Supplied with 1/8" NPTF sender

PART NO.	DESCRIPTION	QTY
0-523-17	12V gauge	1
0-523-67	24V gauge	1
0-523-89	Replacement sender	1

FUEL GAUGE, 90° SWEEP DIAL



- Supplied with adjustable sender

PART NO.	DESCRIPTION	QTY
0-523-06	12V gauge	1
0-523-56	24V gauge	1
0-523-96	Replacement sender	1

12/24V QUARTZ CLOCK



- Illuminated 52mm electrical dashboard gauge
- Bridge type fitting

PART NO.	DESCRIPTION	QTY
0-523-03	12/24V gauge	1

12V TACHOMETER 270° SWEEP DIAL



- 0 to 8,000rpm
- For 4-6-8 cylinder engines with coil ignition, negative earth vehicles

PART NO.	DESCRIPTION	QTY
0-523-20	52mm Ø tacho	1

EQUIPMENT & ACCESSORIES GAUGES

RANGE 2 - INDUSTRIAL / TRADITIONAL

A range of mechanical dashboard gauges for 52mm panel holes. Matt black bezels and white figures on an illuminated matt black background. Bridge type fitting. Supplied with 12 and 24V bulbs.

OIL PRESSURE GAUGE, 270° SWEEP DIAL



- Supplied with 1/8" NPTF union and 12' copper capillary

PART NO.	DESCRIPTION	QTY
0-533-16	Oil pressure gauge	1
0-533-98	12' capillary kit	1

AIR PRESSURE GAUGE, 270° SWEEP DIAL



- Supplied with 1/8" NPTF union and 12' copper capillary

PART NO.	DESCRIPTION	QTY
0-533-01	Air pressure gauge	1
0-533-98	12' capillary kit	1

OIL TEMPERATURE GAUGE, 270° SWEEP DIAL



- Supplied with 5/8" UNF union and 12' capillary

PART NO.	DESCRIPTION	QTY
0-533-15	Oil temperature gauge	1

WATER TEMPERATURE GAUGE, 270° SWEEP DIAL



- Supplied with 5/8" UNF union and 12' capillary

PART NO.	DESCRIPTION	QTY
0-533-23	Water temp. gauge	1
0-533-73	As above but 100-280° Fahrenheit	1

TURBO BOOST GAUGE, 270° SWEEP DIAL



- Supplied with 5/8" UNF union and 5' of PVC tubing
- Pressure -1 to +1.5 bar

PART NO.	DESCRIPTION	QTY
0-533-02	Turbo boost gauge	1

TACHOMETER, 270° DIAL



- For 86mm diameter panel hole
- 12 or 24V
- 270° dial
- Bridge fitting
- Programmable alternator pick-up

PART NO.	DESCRIPTION	QTY
0-523-78	86mm Ø tacho with hour meter. 0 to 4,000 rpm	1
0-523-70	86mm Ø tacho. 0 to 4,000 rpm	1

REPLACEMENT ILLUMINATION LAMP

Replacement 12V and 24V illumination lamp for:
0-523-01, 0-523-51, 0-533-16, 0-533-01
0-533-15, 0-533-23, 0-533-73, 0-533-02

PART NO.	DESCRIPTION	QTY
0-533-91	Replacement 12V illumination lamp	1
0-533-92	Replacement 24V illumination lamp	1

EQUIPMENT & ACCESSORIES GAUGES

RECTANGULAR ENGINE HOUR COUNTER



- For 37 x 24mm rectangular panel hole
- 8 - 32V
- Non-illuminated
- Bridge fitting 70mm deep

PART NO.	QTY
0-523-58	1

CIRCULAR ENGINE HOUR COUNTER



- 10 - 80VDC
- Non-illuminated
- Bridge fitting 75mm deep

PART NO.	QTY
0-523-08	1

DIGITAL LCD ENGINE HOUR COUNTER



- For 52mm diameter panel hole
- 10 - 36VDC
- Non-illuminated
- Bridge fitting 40mm deep

PART NO.	QTY
0-523-68	1

RANGE 3 - MARINE / WATERPROOF

A range of LED backlit, illuminated needle 52mm plastic cased electrical marine gauges. Matt black bezels and dials with white figures. Large screw collar type fitting.

12/24V 80-0-80A AMMETER, 90° SWEEP DIAL



- Uses inductive pick up coil

PART NO.	QTY
0-525-01	1

12/24V, 40° TO 120° C WATER TEMPERATURE GAUGE, 90° SWEEP DIAL

- Supplied with 1/8" NPTF sender

PART NO.	DESCRIPTION	QTY
0-525-23	12/24V gauge	1
0-525-85	Replacement sender	1



12/24V, 50° TO 150° C OIL TEMPERATURE GAUGE, 90° SWEEP DIAL

- Supplied with 1/8" NPTF sender

PART NO.	DESCRIPTION	QTY
0-525-15	Oil temperature gauge	1
0-525-85	Replacement sender	1



12/24V FUEL LEVEL GAUGE, 90° SWEEP DIAL



- Supplied without pole tank sender

PART NO.	DESCRIPTION	QTY
0-525-06	Fuel level gauge	1

12/24V, 0 TO 10 BAR OIL PRESSURE GAUGE, 90° SWEEP DIAL

- Supplied with 1/8" NPTF sender

PART NO.	DESCRIPTION	QTY
0-525-16	Oil pressure gauge	1
0-525-86	Replacement sender	1



EQUIPMENT & ACCESSORIES GAUGES

12/24V WATER LEVEL GAUGE,
90° SWEEP DIAL



- Supplied without pole tank sender

PART NO.	DESCRIPTION	QTY
0-525-12	Water level gauge	1

BATTERY CONDITION
VOLTMETER, 90° SWEEP DIAL



PART NO.	DESCRIPTION	QTY
0-525-22	12V, scale 8-16V	1
0-525-72	24V, scale 16 - 32V	1

STAINLESS STEEL POLE TANK
SENDER

PART NO.	DEPTH	QTY
0-525-92	250mm stainless steel pole tank sender	1
0-525-93	290mm stainless steel pole tank sender	1
0-525-94	350mm stainless steel pole tank sender	1
0-525-95	500mm stainless steel pole tank sender	1
0-525-96	600mm stainless steel pole tank sender	1

12/24V TACHOMETER 270° SWEEP DIAL



Bridge type fixing.



- Negative earth vehicles

PART NO.	DESCRIPTION	QTY
0-525-10	0 to 4,000rpm. Adjustable for alternator pick-up	1
0-525-20	0 to 8,000rpm. For 4-6-8-12 cylinder engines with coil ignition	1
0-525-80	85mm diameter, 0 to 8,000rpm. For 4-6-8-12 cylinder engines with coil ignition	1

DASHBOARD GAUGES

12/24V DUAL BATTERY VOLTAGE MONITOR

Can be set for high and low voltage warning levels on 2 battery circuits, warning is indicated by highlighting the voltage on the display and an integral buzzer can also be enabled. The warning is delayed 5 seconds to prevent spurious warnings. The monitor also has a clock function and automatic sleep functions.

- Panel Mount
- L 56 x W 20 x H 66mm



PART NO.	QTY
0-852-00	1

12-72V BATTERY FUEL HOUR METER GAUGE



- LED battery indicator and LCD hour counter
- ø60 x H 49mm

PART NO.	QTY
0-523-18	1

EQUIPMENT & ACCESSORIES GAUGES

ACCESSORIES

SOLID BRASS ADAPTORS FOR GAUGES AND SENDERS

PART NO.	DESCRIPTION	QTY
0-523-98	1/8" NPTF to M14 x 1.5, M16 x 1.5, M18 x 1.5	1
0-523-99	1/8" NPTF to 5/8 UNF, 3/8 NPTF, 1/8 BSP, 1/2 NPTF	1
0-533-99	5/8" UNF to M16 x 1.5, M18 x 1.5, 1/2 NPTF	1
0-523-97	'T' piece 1/8" NPTF	1



MATT BLACK STEEL PANELS FOR MOUNTING 52 MM GAUGES

Mounting panels for 52mm premium and traditional gauges.

NOTE: not for use with marine gauges.

PART NO.	DESCRIPTION	QTY
0-243-01	1 hole	1
0-243-02	2 hole	1
0-243-03	3 hole	1



GAUGE MOUNTING POD FOR 52MM GAUGES

Mounting pod for 52mm premium and traditional gauges.

Gauge mounting pod for 52mm gauges (except 0-523-08), made of black ABS plastic, designed for on or under dash mounting. Supplied with fixing screws and adhesive pad.

NOTE: not for use with marine gauges.

PART NO.	QTY
0-243-04	1



USB PORT SOCKETS AND USB PORT CIGARETTE LIGHTER PLUGS.
SEE PAGE 214 & 215.



RETRACTABLE CABLE

3 CORE RETRACTABLE CABLE



- Black hytrel sheathed
- 4.5 metre maximum working length
- 350 x 110mm closed coil
- 2 x 250mm plain tails
- 3 x 6.00mm² red, black and green rubber insulated cores

PART NO.	QTY
0-777-02	1



- Black rubber sheath
- 3 metre maximum working length
- 500 x 70mm closed coil, with 2 x moulded waterproof 3 pole sockets
- 3 x 6.00mm² black, green and red rubber insulated cores

PART NO.	QTY
0-733-10	1



- Black rubber sheathed
- 2 plain 150mm tails
- 3 x 0.75mm² blue, brown and green/yellow PVC insulated cores

PART NO.	DESCRIPTION	QTY
0-733-00	6m working length, 1200 x 35mm closed coil	1
0-733-01	3m working length, 600 x 35mm closed coil	1

5 CORE RETRACTABLE CABLE



- Black rubber sheathed. Grey (0-715-01)
- 2 plain 150mm tails
- 3 x 0.75mm² blue, brown and green/yellow PVC insulated cores

PART NO.	DESCRIPTION	QTY
0-715-00	6m working length, 1200 x 37mm diameter closed coil	1
0-715-01	3m working length, 600 x 37mm diameter closed coil	1






LOOKING FOR POWER CABLES? SEE PAGE 139 & 140.

7 CORE RETRACTABLE CABLE



- Black hytrel sheathed
- 3.3 metre maximum working length
- 220 x 85mm diameter closed coil
- 2 x 230mm plain tails
- 1 x 2.00mm² white + 6 x 1.00mm² blue, black, yellow, red, green and brown rubber insulated cores

PART NO.	QTY
0-777-00	1



- Black rubber sheathed
- 2 x 230mm plain tails
- 1 x 2.00mm² white, + 6 x 1.00mm² blue, black, yellow, red, green and brown PVC insulated cores

PART NO.	DESCRIPTION	QTY
0-717-00	6.6m working length, 1080 x 45mm closed coil	1
0-717-01	3m working length, 600 x 35mm closed coil	1

7 CORE RETRACTABLE CABLE WITH SOCKETS



- Black rubber sheath
- 3 metre maximum working length
- 450 x 55mm closed coil, with 1 x 230mm plain tail and 1 moulded waterproof socket to ISO1185(24N)
- 1 x 2.00mm² white + 6 x 1.00mm² black, brown, green, blue, red and yellow PVC insulated cores

PART NO.	DESCRIPTION	QTY
0-717-05	One socket	1
0-717-10	Two sockets	1



- Black hytrel sheath
- 3 metre maximum working length
- 200 x 85mm closed coil, with 1 x 230mm plain tail and 2 moulded waterproof sockets to ISO1185(24N)
- 1 x 2.00mm² white + 6 x 1.00mm² black, brown, green, blue, red and yellow rubber insulated cores

PART NO.	QTY
0-717-11	1



- Black rubber sheath
- 3 metre maximum working length
- 450 x 55mm closed coil, with 2 moulded waterproof socket to ISO3731(24S)
- 1 x 2.00mm² white + 6 x 1.00mm² black, brown, green, blue, red and yellow PVC insulated cores

PART NO.	QTY
0-717-13	1



- Green hytrel sheath
- 3 metre maximum working length
- 200 x 85mm closed coil, with 2 moulded waterproof socket to ISO3731(24S)
- 1 x 2.00mm² white + 6 x 1.00mm² black, brown, green, blue, red and yellow rubber insulated cores

PART NO.	QTY
0-717-12	1



- Black hytrel sheath
- 285 x 90mm closed coil, fitted with 2 x EBS sockets to ISO7638
- 2 x 4mm² + 5 x 1.5mm² PVC insulated cores

PART NO.	DESCRIPTION	QTY
0-715-13	4.5 metre maximum working length	1
0-715-14	3.5 metre maximum working length	1



- 24V
- "EBS" sockets to ISO7638-1
- 3 and 4m working lengths
- Black TPU outer-sheath
- 5 x 1.00mm² + 2 x 2.50mm² power cable

PART NO.	DESCRIPTION	QTY
0-715-23	3m with 2 x EBS connectors	1
0-715-24	4m with 2 x EBS connectors	1



- 24V
- 24 "N" TYPE connectors to ISO1185
- 3, 4, 4.5m working lengths
- Black TPU outer-sheath
- 6 x 1.00mm² 1 x 2mm² power cable
- Solid moulded connectors

PART NO.	DESCRIPTION	QTY
0-717-23	3m with 2 x N connectors	1
0-717-25	4.5m with 2 x N connectors	1



- 24V
- 24 "S" TYPE connectors to ISO3731
- 3 and 4m working lengths
- Black TPU outer-sheath
- 6 x 1.00mm² 1 x 2mm² power cable
- Solid moulded connectors

PART NO.	DESCRIPTION	QTY
0-717-33	3m with 2 x S connectors	1

EQUIPMENT & ACCESSORIES RETRACTABLE CABLE

10 CORE RETRACTABLE CABLE



- Black hytrel sheath
- 3.5 metre maximum working length, 260 x 85mm diameter closed coil, 2 x 230mm plain tails
- 1 x 2.00mm² white + 9 x 1.00mm² blue, black, yellow, red, green, brown, orange, grey, and pink PVC insulated cores

PART NO.	QTY
0-510-00	1

15-PIN TO 7-PIN 24V ADAPTOR CABLE



- 24V
- Water resistant
- 3 or 4m
- Black polyurethane cable

PART NO.	DESCRIPTION	QTY
0-777-23	3 metre 15-Pin to 24N & 24S	1
0-777-24	4 metre 15-Pin to 24N & 24S	1

15 CORE RETRACTABLE CABLE




- Black hytrel sheath
- 3 metre working length
- 3 x 2.50mm² white, orange, white/red, 10 x 1.50mm² yellow, green, blue, black, brown, red, pink, grey, white/black, white/blue, 2 x 1.50mm² white/green and white/brown twisted pair
- PVC insulated cores

PART NO.	QTY
0-777-15	1



WE'RE ON SOCIAL MEDIA FOLLOW US @DURITELIMITED

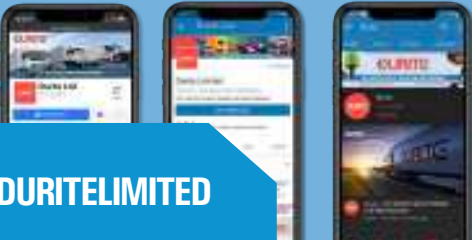

COMMERCIAL WIPER BLADES

COMPACT HEAVY-DUTY RANGE



Robust design



Easy install



Corrosion resistant

HIGH QUALITY REPLACEMENT COMMERCIAL VEHICLE WIPER BLADES

- ✓ Compact commercial vehicle range
- ✓ Quick and easy installation
- ✓ Stainless steel construction, corrosion resistant & graphite coated
- ✓ Heavy-duty riveted joints for extra strength & reduced noise
- ✓ 100% natural rubber injection moulded to correct length

PART NO.	SIZE	ARM FIXING & FITTING	QTY	
0-896-01	20" 510mm	Hook	1	1
0-896-02	22" 550mm	Bolt & Spacer	6	1
0-896-03	24" 600mm	Short Hook	3, 4, 8	1
0-896-04	24" 600mm	Washer Nozzle & Hook	2	1
0-896-05	26" 650mm	Bolt & Spacer	6	1
0-896-06	26" 650mm	Short Hook	3, 4, 8	1
0-896-07	26" 650mm	Hook	9	1
0-896-08	26" 650mm	Washer Nozzle & Hook	2	1
0-896-10	28" 700mm	Short Hook	3, 4, 8	1
0-896-11	28" 700mm	Bolt & Spacer	6	1
0-896-12	28" 700mm	Washer Nozzle & Short Hook	4, 8	1
0-896-13	32" 800mm	Bolt & Spacer	7	1
0-896-14	36" 900mm	Bolt & Spacer	7	1
0-896-15	36" 900mm	Hook	5	1
0-896-16	40" 1000mm	Bolt	7	1
0-896-17	40" 1000mm	Hook	5	1

“

Available from
20" up to 40."

”

FITTINGS GUIDE

1



MULTIFIT



9x3mm & 9x4mm Hook Arm

2



MULTIFIT



9x3mm & 9x4mm + SPRAY NOZZLE

3



9x4mm Hook



9x4mm Hook Arm

4



12x4mm Hook



12x4mm Hook Arm

5



16x6mm Hook



16x6mm Hook Arm

6



17mm Spacer



13mm & 17mm Saddle

7



22mm, 25mm & 27mm Spacer



22mm, 25mm & 27mm Saddle

8



9x4mm Short Hook



9x4mm Hook Arm

9



14x4mm Hook



14x4mm Hook Arm



STAND18, wall mounted & holds 60 wiper blades. See page 296.

WIPER EQUIPMENT

WINDSCREEN WIPER MOTORS

SWITCHED, SINGLE SHAFT, SINGLE SPEED

- Switched, single shaft, single speed 40 cycles per minute, without automatic park
- Starting torque 6Nm, running torque 0.9Nm
- M12 shaft and M6 bolt
- Tapered arm fixing to DIN 72783



PART NO.	ANGLE	VOLTS	ARM FIXING	SHAFT LENGTH	QTY
0-862-85	85°	12	A8 x M6	42mm	1
0-862-05	105°	12	A8 x M6	42mm	1
0-863-65	65°	12	A8 x M6	55mm	1
0-863-85	85°	12	A8 x M6	94mm	1
0-863-05	105°	12	A8 x M6	94mm	1
0-883-85	85°	24	A8 x M6	94mm	1

SWITCHED, TWIN SHAFT, SINGLE SPEED

- Switched, twin shaft, single speed 40 cycles per minute, without automatic park
- Starting torque 12Nm, running torque 1.8Nm
- M12 and M8 shafts with 57mm centres
- Tapered arm fixing to DIN 72783



PART NO.	ANGLE	VOLTS	ARM FIXING	SHAFT LENGTH	QTY
0-864-80	80°	12	A8 x M6 + M8	65mm	1
0-864-95	95°	12	A8 x M6 + M8	65mm	1
0-864-05	105°	12	A8 x M6 + M8	65mm	1
0-884-80	80°	24	A8 x M6 + M8	65mm	1
0-884-95	95°	24	A8 x M6 + M8	65mm	1
0-884-05	105°	24	A8 x M6 + M8	65mm	1

SWITCHED, TWIN SHAFT, SINGLE SPEED

- Switched, twin shaft, single speed 45 cycles per minute, with right hand automatic park
- Starting torque 10Nm, running torque 1.8Nm
- M12 and M8 shafts with 55 mm centres
- Tapered arm fixing to DIN 72783



PART NO.	ANGLE	VOLTS	ARM FIXING	SHAFT LENGTH	QTY
0-866-80	80°	12	A8 x M6 + M8	58mm	1
0-866-90	90°	12	A8 x M6 + M8	58mm	1
0-886-80	80°	24	A8 x M6 + M8	58mm	1
0-886-10	110°	24	A8 x M6 + M8	58mm	1

UNSWITCHED, TWIN SHAFT, SINGLE SPEED

- Unswitched slim line, twin shaft, single speed 42 cycles per minute, with automatic park



- Starting torque of 13Nm, running torque 2Nm
- Fitted with thermal cut-out.
- M16 and M8 shaft on 57mm centres.
- Tapered arm fixing to DIN 72783


PART NO.	ANGLE	VOLTS	ARM FIXING	SHAFT LENGTH	QTY
0-865-90	90°	12	A8 x M6 + M8	48mm	1
0-865-10	110°	12	A8 x M6 + M8	48mm	1
0-885-90	90°	24	A8 x M6 + M8	48mm	1
0-885-10	110°	24	A8 x M6 + M8	48mm	1

UNSWITCHED, TWIN SHAFT, TWO SPEEDS

- Unswitched, twin shaft, two speeds of 32 and 50 cycles per minute, with right hand automatic park

- Starting torque 28Nm, running torque 3.5Nm
- 2 x M20 shafts on 60mm centres
- Tapered arm fixing to DIN 72783

PART NO.	ANGLE	VOLTS	ARM FIXING	SHAFT LENGTH	QTY
0-867-00	60-70-80°	12	2 x A12 x M8	50mm	1
0-867-01	60-70-80°	12	2 x A12 x M8	80mm	1
0-887-00	60-70-80°	24	2 x A12 x M8	50mm	1
0-887-01	60-70-80°	24	2 x A12 x M8	80mm	1



EQUIPMENT & ACCESSORIES WIPER EQUIPMENT

WIPER ARMS

SINGLE ADJUSTABLE LENGTH ARM



- Matt black, powder coated steel
- Straight flat 8mm connection to the blade
- For single shaft motors or where a single arm is required on a two shaft motor
- Tapered A8 DIN 72783 shaft connection

PART NO.	LENGTH	BLADE FIXING	SHAFT FIXING	QTY
0-891-00	300 - 400mm	8 x 2.5mm	A8 x M6	1
0-891-01	400 - 500mm	8 x 2.5mm	A8 x M6	1

PANTOGRAPH, ADJUSTABLE LENGTH ARM



- Matt black, powder coated steel
- Two screw fixing connection to the blade
- For double shaft motors
- Tapered A8 DIN 72783 shaft connection

PART NO.	LENGTH	BLADE FIXING	SHAFT FIXING	QTY
0-892-00	400 - 500mm	2 screws	A8 x M6 + M8	1

STEEL ARM FOR TWIN SHAFT MOTORS



- Pantograph, matt black powder coated
- Steel arm for twin shaft motors
- 16.5mm pin connection
- Tapered A12 DIN 72783 shaft connections

PART NO.	LENGTH	BLADE FIXING	SHAFT FIXING	QTY
0-893-50	500mm	16.5mm/pin	2 x A12 x M8	1
0-893-60	600mm	16.5mm/pin	2 x A12 x M8	1
0-893-70	700mm	16.5mm/pin	2 x A12 x M8	1
0-893-80	800mm	16.5mm/pin	2 x A12 x M8	1

SINGLE ARM FLAT BLADES



- Matt black powder coated steel
- For single adjustable arms 0-891-xx and 0-892-00
- Two screw fixing

PART NO.	LENGTH	BLADE FIXING	QTY
0-890-30	300mm	8 x 2.5mm	1
0-890-35	350mm	8 x 2.5mm	1
0-890-40	400mm	8 x 2.5mm	1

SINGLE OR PANTOGRAPH SPRING BLADES



- Matt black powder coated steel
- For single or pantograph adjustable arms 0-891-xx and 0-892-00
- Two screw fixing

PART NO.	LENGTH	BLADE FIXING	QTY
0-894-30	300mm	8 x 2.5mm	1
0-894-40	400mm	8 x 2.5mm	1
0-894-50	500mm	8 x 2.5mm	1
0-894-60	600mm	8 x 2.5mm	1

PANTOGRAPH SPRING BLADES



- Matt black powder coated steel
- For pantograph arms 0-893-xx. 16.5mm channel and pin fixing

PART NO.	LENGTH	BLADE FIXING	QTY
0-895-50	500mm	16.5mm + pin	1
0-895-60	600mm	16.5mm + pin	1
0-895-70	700mm	16.5mm + pin	1
0-895-80	800mm	16.5mm + pin	1

EQUIPMENT & ACCESSORIES WIPER EQUIPMENT

N.B. Must not be run dry

WASHER PUMPS

VANE TYPE PUMP



- Universal fixing bracket



PART NO.	DESCRIPTION	QTY
0-593-12	12V Pump	1
0-593-24	24V Pump	1

VANE TYPE PUMP



- Metal fixing bracket
- Replaces Lucas WSB 100



PART NO.	DESCRIPTION	QTY
0-594-15	12V Pump	1
0-594-27	24V Pump	1

VANE TYPE PUMP



- Push fit into bottle
- Replacement for Durite washer bottle pump



PART NO.	DESCRIPTION	QTY
0-593-62	12V Pump	1
0-593-74	24V Pump	1

12V VANE, SINGLE OUTLET



- 12V
- Push fit into bottle
- Land Rover, Rover



PART NO.	DESCRIPTION	QTY
0-594-05	Single outlet pump	1

VANE TYPE, SINGLE OUTLET



- Metal bracket
- Audi, BMW, Mercedes, Porsche, Volkswagen and universal



PART NO.	DESCRIPTION	QTY
0-594-33	12V Pump	1
0-594-45	24V Pump	1

12V VANE, SINGLE OUTLET



- 12V
- Push fit into bottle
- Audi, Ford, Jaguar, Rover, Renault, Vauxhall, Volvo, Volkswagen



PART NO.	DESCRIPTION	QTY
0-594-36	Single outlet pump	1

VANE TYPE SINGLE OUTLET



- Metal bracket
- Fits Mercedes, Scania, Volvo



PART NO.	DESCRIPTION	QTY
0-594-46	24V Pump	1

VANE TYPE, SINGLE OUTLET



- Push fit into bottle
- Fits Saab, Volvo



PART NO.	DESCRIPTION	QTY
0-594-47	24V Pump	1

VANE TYPE PUMP



- Push fit into bottle
- Replaces 90045820, 1450156 for some popular Vauxhall/Opel cars



PART NO.	DESCRIPTION	QTY
0-594-53	12V Pump	1
0-594-59	24V Pump	1

VANE TYPE PUMP



- Push fit into bottle
- Replaces Lucas 6120440, 6156960, 6085824, 8269 for some popular Ford cars



PART NO.	DESCRIPTION	QTY
0-594-54	12V Pump	1
0-594-60	24V Pump	1

12V VANE TYPE PUMP



- 12V
- Push fit into bottle
- Replaces GWW130 for some Austin / Rover cars



PART NO.	DESCRIPTION	QTY
0-594-51	12V Pump	1

24V VANE, SINGLE OUTLET



- 24V
- Push fit into bottle
- Austin



PART NO.	DESCRIPTION	QTY
0-594-65	Single outlet pump	1

EQUIPMENT & ACCESSORIES WIPER EQUIPMENT WASHER PUMPS

N.B. Must not be run dry

24V VANE, SINGLE OUTLET



- 24V
- Push fit into bottle
- DAF, MAN, Scania, Volvo

PART NO.	DESCRIPTION	QTY
0-594-66	Single outlet pump	1

24V VANE, DUAL OUTLET



- 24V
- Push fit into bottle
- DAF, MAN, Scania

PART NO.	DESCRIPTION	QTY
0-594-68	Dual outlet pump	1

24V VANE, SINGLE OUTLET



- 24V
- Plastic bracket
- Scania, Volvo and universal

PART NO.	DESCRIPTION	QTY
0-594-69	Single outlet pump	1

24V VANE, SINGLE OUTLET



- 24V
- Plastic bracket
- Scania, Volvo and universal

PART NO.	DESCRIPTION	QTY
0-594-70	Single outlet pump	1

24V VANE, SINGLE OUTLET



- 24V
- Plastic bracket
- Scania, Volvo and universal

PART NO.	DESCRIPTION	QTY
0-594-71	Single outlet pump	1

24V VANE, SINGLE OUTLET



- 24V
- Push fit into bottle
- Scania, Volvo

PART NO.	DESCRIPTION	QTY
0-594-72	Single outlet pump	1

WINDSCREEN WASHER BOTTLES

1.2L PVC WASHER BOTTLE



- 1.2 litre
- PVC
- Mounting bracket
- L 104 x W 125 x H 195mm

PART NO.	DESCRIPTION	QTY
0-593-00	Bottle, 12V pump	1
0-593-01	Bottle, 24V pump	1

3.0L PVC WASHER BOTTLE



- 3.0 litre
- PVC
- L 104 x W 200 x H 195mm
- Single pump

PART NO.	DESCRIPTION	QTY
0-594-00	Bottle, 12V pump	1
0-594-01	Bottle, 24V pump	1

3.0L TWIN WASHER BOTTLE



- 3.0 litre
- PVC
- Twin pumps
- L 104 x W 200 x H 195mm

PART NO.	DESCRIPTION	QTY
0-594-02	Bottle, 12V pumps	1
0-594-03	Bottle, 24V pumps	1



Durite offers an extensive range of Equipment & Accessories. These include gauges, lighter, DIN, 12V and 24V plugs & sockets, windscreen wiper equipment, fans and horns.

EQUIPMENT & ACCESSORIES WIPER EQUIPMENT WASHER BOTTLES & COMPONENTS

WINDSCREEN WASHER COMPONENTS

LOW PROFILE SINGLE WASHER JET

- Low profile single, adjustable washer jet
- For 4mm windscreen washer tubing
- Through panel fitting by a back nut



PART NO.	DESCRIPTION	QTY
0-593-54	Washer jet	1

TWIN, ADJUSTABLE WASHER JET

- Twin, individually adjustable, washer jet
- For 4mm windscreen washer tubing
- Through panel fitting by a back nut



PART NO.	DESCRIPTION	QTY
0-593-56	Washer jet	1

LOW PROFILE TWIN WASHER JET

- Low profile twin, individually adjustable, washer jet
- For 4mm windscreen washer tubing
- Through panel fitting by a back nut



PART NO.	DESCRIPTION	QTY
0-593-53	Washer jet	1

TALL TWIN WASHER JET

- Tall twin, individually adjustable, washer jet
- For 4mm windscreen washer tubing
- Through panel fitting by a back nut



PART NO.	DESCRIPTION	QTY
0-593-51	Washer jet	1

WINDSCREEN WASHER NOZZLE

- Fitting 8mm windscreen wiper arms
- Windscreen washer nozzle with 3 individually adjustable jets
- For 4mm windscreen washer tubing



PART NO.	DESCRIPTION	QTY
0-593-55	Windscreen washer nozzle	1

BULKHEAD CONNECTOR

- Bulkhead connector for 4mm windscreen washer tubing
- Through panel fitting by a back nut



PART NO.	DESCRIPTION	QTY
0-593-05	Bulkhead connector	1

PLASTIC CLIP

- Plastic clip for securing 4mm rubber windscreen washer tubing to wiper arm type 0-891-xx and 0-892-xx



PART NO.	DESCRIPTION	QTY
0-593-06	Plastic clip	10

PLASTIC IN-LINE CONNECTOR

- Plastic in-line connector for 4mm diameter tubing



PART NO.	DESCRIPTION	QTY
0-593-03	In-line connector	10

PLASTIC T PIECE CONNECTOR

- Plastic T piece connector for 4mm diameter tubing



PART NO.	DESCRIPTION	QTY
0-593-04	T piece connector	10

PLASTIC IN-LINE NON-RETURN VALVE

- Plastic in-line non-return valve for 4mm diameter tubing



PART NO.	DESCRIPTION	QTY
0-593-07	In-line non-return valve	1

4MM DIAMETER PVC TUBING

- PVC
- Black or Clear rubber
- 4mm inside diameter



PART NO.	DESCRIPTION	QTY
0-593-16	Clear tubing	10m
0-593-18	Black tubing	10m
3-593-18	Black tubing	50m

HORNS

ELECTRIC HORNS

DISC HORN



- Disc horn, 2 pole, 114dB(A) at 2m
- Diaphragm type with passivated and painted steel body
- Supplied with mounting strap
- 91mm diameter
- ECE approved

PART NO.	DESCRIPTION	QTY
0-642-16	12V 430Hz high tone	1
0-642-17	12V 340Hz low tone	1
0-642-26	24V 430Hz high tone	1
0-642-27	24V 340Hz low tone	1
0-642-48	48V 430Hz high tone	1

TRUMPET HORN



- Trumpet horn, 2-pole
- 109dB(A) at 2m
- Black plastic body and red plastic cover
- Supplied with mounting strap
- 83mm diameter

PART NO.	DESCRIPTION	QTY
0-642-31	12V Electric trumpet horn. 500Hz high tone	1
0-642-33	24V version of the above	1
0-642-32	12V Electric trumpet horn. 420Hz low tone	1
0-642-34	24V version of the above	1

ELECTRONIC DISC HORN



- Disc horn, electronic, contactless 2 pole
- 110dB(A) at 2m
- Diaphragm type
- Passivated steel body
- Supplied with mounting strap
- 90mm diameter
- CE approved

PART NO.	DESCRIPTION	QTY
0-642-30	24-48V 410Hz high tone	1

COMPACT DISC HORN



- Compact disc horn, 2 pole
- 109dB(A) at 2m
- Diaphragm type
- Painted steel body
- Supplied with mounting strap, 71mm diameter
- ECE approved

PART NO.	DESCRIPTION	QTY
0-642-18	12V 430Hz high tone	1
0-642-19	12V 340Hz low tone	1

MARINE TRUMPET HORN



- Marine trumpet horn, 2 pole, high tone 109dB(A) and low tone 107dB(A) at 2m
- Diaphragm type with chromium plated brass body and ABS trumpet
- Stainless steel mounting bracket
- Pre-wired
- 110mm diameter
- ECE approved

PART NO.	DESCRIPTION	QTY
0-642-14	12V 475Hz high tone	1
0-642-15	12V 410Hz low tone	1
0-642-24	24V 475Hz high tone	1

EQUIPMENT & ACCESSORIES WIPER EQUIPMENT

MARINE ELECTRO-MAGNETIC TRUMPET HORNS

- Marine electro-magnetic trumpet horns 112dB(A).
- Chromium plated brass trumpets
- Stainless steel fittings
- Pre-wired for isolated return
- ECE approved



PART NO.	DESCRIPTION	QTY
0-642-52	12V 390Hz high tone, 430mm long	1
0-642-53	12V 340Hz low tone, 500mm long	1
0-642-66	24V 390Hz high tone, 430mm long	1
0-642-67	24V 340Hz low tone, 500mm long	1

TWIN ELECTRO-MAGNETIC TRUMPET HORNS



- Twin electro-magnetic trumpet horns, 113dB(A) at 2m
- Black ABS body and trumpet with steel bracket and red covers
- Pre-wired and supplied with relay
- ECE approved

PART NO.	DESCRIPTION	QTY
0-642-28	24V 340-380 Hz twin tone, 397mm long	1

ELECTRO-PNEUMATIC "OLD STYLE" HORN

- Electro-pneumatic "old style" trumpet horn, 12V
- Makes "Arrooooughaaa" sound
- Not ECE approved

Sound level 102dB(A) at 2m
Frequency 500 Hz

PART NO.	DESCRIPTION	QTY
0-642-01	Electro-pneumatic trumpet horn	1



AIR HORNS

SINGLE COMMERCIAL AIR HORN

- Single commercial air horn, chromium plated brass trumpet
- Supplied with hand valve/fixings
- ECE approval

PART NO.	DESCRIPTION	QTY
0-642-65	Commercial air horn	1
0-642-60	Shorter version	1
0-642-51	Dust cover	1

Length 770mm
Sound level 118dB(A)
Frequency 176Hz
Pressure 2-10bar

Shorter version
Length 700mm
Sound level 118dB(A)
Frequency 190Hz
Pressure 2-10bar




TWIN COMMERCIAL AIR HORN

- Twin commercial air horn, chromium plated brass trumpet
- Supplied with hand valve/fixings
- ECE approval

PART NO.	DESCRIPTION	QTY
0-642-55	Twin air horn	1
0-642-50	Shorter version	1

Length 630mm
Sound level 116dB(A)
Frequency 186/234Hz
Pressure 2-10bar

Shorter version
Length 440mm
Sound level 116dB(A)
Frequency 282/321Hz
Pressure 2-10bar

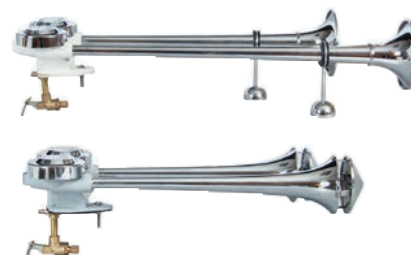

EQUIPMENT & ACCESSORIES HORNS ELECTRIC HORNS & AIR HORNS

COMMERCIAL DEEP LOW TONE AIR HORN



- Commercial deep low tone air horn, with moulded black body and trumpet
- Supplied with 24V electric solenoid valve and fixings
- DGM approved

Sound level 118dB(A) at 2m
Frequency 400Hz
Pressure 2-10bar

PART NO.	DESCRIPTION	QTY
0-642-70	Deep low tone air horn	1

TWIN TONE AIR HORNS



- Twin tone air horns 115dB(A) at 2m
- 750-800Hz
- Compact air compressor
- Relay, air pipe and fixing hardware

PART NO.	DESCRIPTION	QTY
0-642-00	12V Air horn	1
0-642-04	24V Air horn	1

ELECTRIC SOLENOID VALVE



- Electric solenoid valve, for use with commercial air horns
- Suitable for pressures from 2-10bar
- Uses 6mm tubing

PART NO.	DESCRIPTION	QTY
0-642-62	12V	1
0-642-74	24V	1

FANS

POWERFUL OSCILLATING FAN



- A powerful oscillating fan
- Supplied with a multi-angle swivel bracket and dual connection kit comprising, cigarette lighter plug with 1.1 metres of cable and on/off switch with 1.2 metres of cable
- CE approved

PART NO.	DESCRIPTION	QTY
0-210-62	12V, 8" Oscillating fan	1
0-210-74	24V, 8" Oscillating fan	1
0-210-32	12V, 6" Oscillating fan	1
0-210-44	24V, 6" Oscillating fan	1

6" ALL METAL FAN



- A 6" all metal fan, 12V, two speed
- Enclosed metal blades on a multi-angle swivel bracket with on/off switch
- CE approved

PART NO.	DESCRIPTION	QTY
0-210-82	Metal fan	1
0-210-94	24V version	1

SPEAKERS

DUALCONE POD LOUDSPEAKER



- 50W, 4Ω dualcone pod loudspeaker
- Suitable for mounting on a rear parcel shelf
- Speaker 100mm diameter
- Case 115 x 115mm

PART NO.	DESCRIPTION	QTY
0-315-53	Pod loudspeaker	1

DUALCONE DOOR LOUDSPEAKER



- 50W, 4Ω dualcone door loudspeaker with fixing screws
- Speaker 100mm diameter
- Case 108 x 108mm

PART NO.	DESCRIPTION	QTY
0-315-03	Door loudspeaker	2

INTERFERENCE CAPACITOR



- Interference capacitor rated at 110VDC
- 2.2μF black

PART NO.	DESCRIPTION	QTY
0-646-22	Interference capacitor	1

AERIALS

SINGLE SECTION

- Single section, black rubber
- 90° ball adjustment

Height400 mm
Cable 1200 mm

PART NO.	DESCRIPTION	QTY
0-735-00	Single section	1



2 SECTION, ROOF MOUNTED

- 2 section, roof mounted
- Adjustable angle

Closed470 mm
Extended800 mm
Cable2000 mm

PART NO.	DESCRIPTION	QTY
0-650-01	2 section	1



3 SECTION, WING MOUNTED

- 3 section, wing mounted
- Stainless steel spring
- 90° ball adjustment

Closed550 mm
Extended 1250 mm
Cable 1300 mm

PART NO.	DESCRIPTION	QTY
0-650-00	3 section	1



4 SECTION, LOCKING, WING MOUNTED

- 4 section, locking, wing mounted
- Fully retractable

Closed25mm
Extended980 mm
Cable 1200 mm
Underhang220 mm

PART NO.	DESCRIPTION	QTY
0-737-00	4 section	1



EQUIPMENT & ACCESSORIES OIL & FUEL PUMPS

AERIAL EXTENSION LEAD



PART NO.	DESCRIPTION	QTY
0-526-05	600mm aerial extension lead	1
0-526-00	3000mm aerial extension lead	1

12V ELECTRONIC WINDSCREEN



- Includes amplifier

Height 340 mm
Cable 2000 mm

PART NO.	DESCRIPTION	QTY
0-736-00	Electronic windscreen	1

OIL & FUEL PUMPS

DIAPHRAGM PRESSURE FUEL PUMP



- 12V diaphragm pressure fuel pump, electronically switched
- 125 litres per hour
- Pressure 0.30bar
- Suction -0.10bar
- Not suitable for bio-diesel
- ECE approved

PART NO.	DESCRIPTION	QTY
0-673-12	Pressure fuel pump	1
0-673-24	24V version of the above delivering 125 litres per hour	1
0-296-12	12V suction version of the above. 130 litres per hour. Pressure 0.15bar. Suction -0.20bar. ECE approved	1

SOLENOID VALVE FOR PETROL AND DIESEL



- Anti-theft 12V solenoid valve for petrol and diesel
- Cuts off fuel when not energised
- Bore of 3.5mm, pressure 0-3 bar, flow coefficient of 0.28. 8mm OD
- Protected to IP65

PART NO.	DESCRIPTION	QTY
0-129-12	Solenoid valve	1
0-129-62	Large bore version of the above with a bore of 6.0mm, flow coefficient of 0.60. 11mm OD	1
0-129-24	24V version of the above	1

TRANSFER PUMP FOR LUBRICATING OILS



- 12V self-priming up to 1.0m transfer pump for lubricating oils
- Helicoidal bronze gears and nickel-plated brass body
- Stainless steel shaft
- Supplied with 6mm and 8mm flexible suction pipes
- Flow rate from 20 to 60 litres/hr
- Ideal for removing oil from marine and plant engines where the sump is inaccessible

PART NO.	DESCRIPTION	QTY
0-673-65	12V transfer pump	1
0-673-77	24V transfer pump	1
0-673-66	12V version, self-priming up to 1.5m with flow rate from 25 to 75 litres per hour	1

TRANSFER PUMP FOR NON-FLAMMABLE LIQUIDS



- 12V self-priming up to 1.5m transfer pump for non-flammable liquids
- Stainless steel shaft
- 14mm pipes
- Stainless steel inlet filter
- Helicoidal bronze gears and nickel-plated brass body
- Flow rate up to 15 litres/min and pressure up to 2bar, allowing a maximum head of 20 metres

PART NO.	DESCRIPTION	QTY
0-673-63	12V transfer pump	1
0-673-75	24V transfer pump	1
0-673-64	12V version as above with 17mm pipes and flow rate up to 26 litres/min	1
0-673-76	24V version of the above	1

07

RELAYS & FLASHER UNITS



PROGRAMMABLE TIMER RELAYS.....	242
MAKE & BREAK RELAYS	243
CHANGE-OVER RELAYS.....	247
AFTERMARKET RANGE OF RELAYS	249
FLASHER UNITS	251
SOCKETS.....	254
RELAY BOXES.....	254


**RENOWNED FOR THEIR
HIGH PERFORMANCE,
OVERALL QUALITY
AND RELIABILITY.**



RELAYS

PROGRAMMABLE TIMER RELAYS

SELECT RELAY TYPE & SPECIFY TIMING



Programmed timer relays, individually programmed 'PIC' controlled timers with five basic functions: Delay on, delay off, pulse, timer off and flip-flop. Available in 12 and 24V versions. Individually programmed for your requirements.



PART NO. DESCRIPTION

0-740-XX	12V
0-741-XX	24V

SPECIFICATIONS:	12V	24V
VOLTAGE	9 - 16	18 - 32
CURRENT	20/25A	10/15A
TEMPERATURE	-40° to 80°C	-40° to 80°C
PROTECTION	IP54	IP54
DIMENSIONS	L 30 X W 30 X H 40mm	

A list of standard functions and timings are shown below. Please contact our technical department to discuss your requirements. Please note that these relays are programmed to order and are non returnable.



DELAY ON TIMER RELAY



"Delay on" timer relay; timing starts at application of input trigger.

Example timings in seconds: 0.1, 0.5, 1.5, 2.0, 3.0, 3.5, 4.0, 5.0, 8.0, 10.0, 15.0, 100, 180, 240, 600, 1200.



DELAY OFF TIMER RELAY



"Delay off" timer relay; timing starts after input trigger is removed.

Example timings in seconds: 0.2, 0.5, 1.0, 2.5, 3.0, 3.5, 5.0, 6.0, 10.0, 15.0, 30.0, 120, 300, 420, 600, 900, 1200, 1500, 1800, 3600, 7200, 14400.



PULSE TIMER RELAY



"Pulse timer" relay; pulse input triggers timed output.

Example timings in seconds: 0.6, 0.8, 1.3, 3.0, 3.5, 7.0, 9.0, 10.0, 15.0, 30.0, 60, 120, 420, 600, 1200, 2700, 3600.



TIMER OFF TIMER RELAY



"Timer off" timer relay; input triggers timed output, unless input is removed.

Example timings in seconds: 0.6, 0.8, 1.3, 3.0, 3.5, 7.0, 9.0, 10.0, 15.0, 30.0, 120, 420, 600, 2700.

FLIP FLOP TIMER RELAY



"Flip-Flop" timer relay; pulse input triggers output on and off (>100ms).

Input can be positive or negative.


RELAYS & FLASHER UNITS RELAYS TIMER RELAYS

TIMER RELAYS

INTERIOR LIGHT DELAY

Interior light delay, 12V. Four terminal connections. Gives 10 second delay to interior lights, universal application.



1 = door switch
2 = + feed
3 = - earth
5 = - side of lamp



PART NO.	DESCRIPTION	QTY
0-743-12	Interior light delay, 12V	1

ADJUSTABLE PROGRAMMABLE TIMER RELAY

Relay, adjustable programmable timer. 12V delay on or off 0.5 sec to 360 min.




PART NO.	DESCRIPTION	QTY
0-742-12	12V	1
0-742-24	24V	1

MAKE & BREAK RELAYS

MICRO MAKE & BREAK RELAYS

NORMALLY OPEN (NO) 4 x 6.3MM TERMINALS

	PACK 1	PACK 10	PACK 100
DESCRIPTION	PART NO.	PART NO.	PART NO.
12V, 30A, with bracket	0-727-12	2-727-12	3-727-12
24V, 20A, with bracket	0-727-24	2-727-24	3-727-24




LOOKING FOR VOLTAGE SENSITIVE RELAYS?
SEE PAGE 210.




RELAYS & FLASHER UNITS RELAYS MINI MAKE & BREAK RELAYS

2 x 6.3MM & 2 x 2.8MM TERMINALS



PART NO.	DESCRIPTION	QTY
0-727-19	12V, 25A, sealed, with diode	1
0-727-29	24V, 10A, sealed, with diode	1


2 x 6.3MM & 2 x 4.8MM TERMINALS



DESCRIPTION	PACK 1	PACK 100
	PART NO.	PART NO.
12V, 25A, sealed, with Diode	0-727-13	3-727-13
24V, 10A, sealed, with Diode	0-727-25	3-727-25
12V, 25A, sealed, with Resistor	0-727-11	-


MINI MAKE & BREAK RELAYS

NORMALLY CLOSED (NC) 4 x 6.3MM TERMINALS




PART NO.	DESCRIPTION	QTY
0-727-02	12V, 20A, with bracket	1

WITH RESISTOR (NO) 4 x 6.3MM TERMINALS




PART NO.	DESCRIPTION	QTY
0-727-15	12V, 30A, sealed with resistor and without bracket	1
0-727-27	24V, 20A, sealed with resistor and without bracket	1

WITH DIODE (NO) 4 x 6.3MM TERMINALS



DESCRIPTION	PACK 1	PACK 10
	PART NO.	PART NO.
12V, 40A, with diode and bracket	0-727-16	2-727-16
24V, 30A, with diode and bracket	0-727-28	-
12V, 30A, with diode and bracket	0-727-14	-
24V, 20A, with diode and bracket	0-727-26	-



4 X 6.3MM FUSED RELAY (NO)



PART NO.	DESCRIPTION	QTY
0-726-13	12V, 20A, with splash proof cover	1
0-726-25	24V, 15A, with splash proof cover	1



RELAYS & FLASHER UNITS RELAYS MINI MAKE & BREAK RELAYS

FUSED (NO) 4 x 6.3MM TERMINALS





DESCRIPTION	PACK 1	PACK 10
	PART NO.	PART NO.
6V, fused 30A, with bracket	0-726-06	-
12V, fused 20A, with bracket	0-726-12	2-726-12
24V, fused 15A, with bracket	0-726-24	2-726-24

4 x 6.3MM "A" TYPE TERMINALS (NO)





PART NO.	DESCRIPTION	QTY
0-727-62	12V, 30A, with bracket	1
0-727-74	24V, 20A, with bracket	1

TWIN (NO) 5 X 6.3MM TERMINALS



DESCRIPTION	PACK 1	PACK 10
	PART NO.	PART NO.
12V, 40A, with bracket	0-727-32	2-727-32
24V, 20A, with bracket	0-727-44	2-727-44

DOUBLE (NO) 5 X 6.3MM TERMINALS





PART NO.	DESCRIPTION	QTY
0-727-22	12V, 2 x 25A, with bracket	1
0-727-34	24V, 2 x 15A, with bracket	1

HEAVY-DUTY, NORMALLY OPEN

2 x 6.3mm and 2 x 9.5mm terminals.



DESCRIPTION	PACK 1	PACK 10	PACK 100
	PART NO.	PART NO.	PART NO.
12V, 70A, with bracket	0-727-70	2-727-70	3-727-70
24V, 40A, with bracket	0-727-40	2-727-40	-
24V, 70A, sealed with bracket	0-727-47	2-727-47	-



HEAVY-DUTY, WITH RESISTOR (NO)


2 x 6.3mm and 2 x 9.5mm terminals.

DESCRIPTION	PACK 1	PACK 10
	PART NO.	PART NO.
12V, 70A, sealed, with resistor, without bracket	0-727-71	2-727-71
12V, 100A, sealed, with resistor, without bracket	0-727-72	-
24V, 40A, sealed, with resistor, without bracket	0-727-41	-
24V, 50A, sealed, with resistor, without bracket	0-727-42	-




RELAYS & FLASHER UNITS RELAYS MINI MAKE & BREAK RELAYS

4 X 6.3MM "A" TYPE TERMINALS & DIODE (NO)

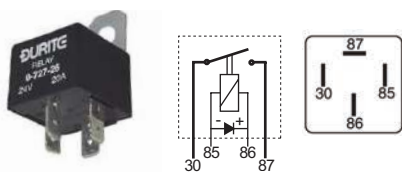

PART NO.	DESCRIPTION	QTY
0-727-64	12V, 40A, with diode and bracket	1
0-727-76	24V, 30A, with diode and bracket	1

4 X 6.3MM "A" TYPE TERMINALS & RESISTOR

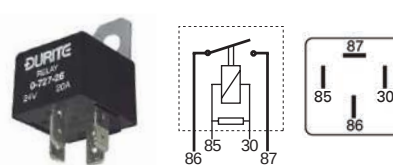


PART NO.	DESCRIPTION	QTY
0-727-63	12V, 30A, sealed, with resistor, without bracket	1

OTHER MAKE & BREAK RELAYS

HEAVY-DUTY, NORMALLY OPEN



2 x 6.3mm terminals
and 2 x M5 screws.




PART NO.	DESCRIPTION	QTY
0-727-07	12V, 75A, with bracket	1
0-727-17	24V, 50A, with bracket	1

EXTRA HEAVY-DUTY, VERTICAL TERMINALS



2 x 6.3mm terminals
and 2 x M6 stud.




PART NO.	DESCRIPTION	QTY
0-727-10	12V, 100A, with bracket	1
0-727-06	24V, 60A, with bracket	1

EXTRA HEAVY-DUTY, HORIZONTAL TERMINALS



2 x 6.3mm terminals and 2 x M6 stud.




	PACK 1	PACK 50	PACK 100
DESCRIPTION	PART NO.	PART NO.	PART NO.
12V, 120A, with bracket	0-727-18	2-727-18	3-727-18
12V, 120A, with diode & bracket	-	-	4-727-18
24V, 100A, with bracket	0-727-08	3-727-08	-

12V 200A EXTRA HEAVY-DUTY MAKE/BREAK



2 x 6.3mm terminals and 2 x M6 studs.




PART NO.	DESCRIPTION	QTY
0-727-09	12V, 200A	1

RELAYS & FLASHER UNITS RELAYS CHANGE-OVER RELAYS

6RA TYPE




Lucas replica.



5 x 6.3mm terminals, neoprene sealed. Replace SRB111, 113.

PART NO.	DESCRIPTION	QTY
0-727-20	12V, 30A, with bracket	1


EXTRA HEAVY-DUTY, NORMALLY OPEN



2 x M8 studs. Supplied with connector lead.

PART NO.	DESCRIPTION	QTY
0-727-68	12V, 200A continuous	1

JAPANESE TYPE (NO)





4 x 6.3mm terminals.

PART NO.	DESCRIPTION	QTY
0-727-50	12V, 30A, with bracket	1

CHANGE-OVER RELAYS



MINI CHANGE-OVER RELAYS

5 x 6.3MM TERMINALS




	PACK 1	PACK 10	PACK 100
DESCRIPTION	PART NO.	PART NO.	PART NO.
6V, 30/40A, with bracket	0-728-06	-	-
12V, 20/30A, with bracket	0-728-12	2-728-12	3-728-12
24V, 10/20A, with bracket	0-728-24	2-728-24	3-728-24

WITH DIODE 5 x 6.3MM TERMINALS





	PACK 1	PACK 10	PACK 500
DESCRIPTION	PART NO.	PART NO.	PART NO.
12V, 30/40A, with diode	0-728-14	2-728-14	4-728-14
24V, 10/20A, with diode	0-728-26	2-728-26	-

WITH RESISTOR 5 x 6.3MM TERMINALS



PART NO.	DESCRIPTION	QTY
0-728-15	12V, 20/30A, sealed with resistor, without bracket	1
2-728-15	12V, 20/30A, sealed with resistor, without bracket	10
3-728-15	12V, 20/30A, sealed with resistor, without bracket	100
0-728-27	24V, 10/20A, sealed with resistor, without bracket	1
2-728-27	24V, 10/20A, sealed with resistor, without bracket	10


5 x 6.3MM "A" TYPE TERMINALS



PART NO.	DESCRIPTION	QTY
0-728-62	12V, 20/30A, with bracket	1
0-728-74	24V, 10/20A, with bracket	1



RELAYS & FLASHER UNITS RELAYS CHANGE-OVER RELAYS

5 x 6.3MM "A" TYPE TERMINALS & RESISTOR





PART NO.	DESCRIPTION	QTY
0-728-63	12V, 20/30A, sealed, with resistor, without bracket	1
0-728-75	24V, 10/20A, sealed, with resistor, without bracket	1

HEAVY-DUTY 2 x 6.3MM & 3 x 9.5MM TERMINALS



PART NO.	DESCRIPTION	QTY
0-728-70	12V, 60/70A, with bracket	1
0-728-40	24V, 30/40A, with bracket	1



EXTRA HEAVY-DUTY 2 x 6.3MM & 3 x 9.5MM TERMINALS



PART NO.	DESCRIPTION	QTY
0-728-72	12V, 80/100A, sealed, without bracket	1
0-728-42	24V, 40/50A, sealed, without bracket	1

OTHER CHANGE-OVER RELAYS



6RA TYPE, 5 x 6.3MM TERMINALS



Neoprene sealed. Replaces SRB131, 143, 146.



PART NO.	DESCRIPTION	QTY
0-728-20	12V, 20/30A, with bracket	1

LATCHING, 5 x 6.3MM TERMINALS



PART NO.	DESCRIPTION	QTY
0-728-02	12V, 25A, with resistor	1
0-728-04	24V, 12A, with resistor	1

MICRO 3 x 4.8MM & 2 x 6.3MM TERMINALS



DESCRIPTION

	PACK 1	PACK 10	PACK 100
	PART NO.	PART NO.	PART NO.
12V, 15/25A sealed, with diode	0-728-13	2-728-13	3-728-13
24V, 10/15A, sealed, with diode	0-728-25	2-728-25	3-728-25
12V 15/25A, sealed, with resistor	0-728-16	-	-
24V 10/15A, sealed, with resistor	0-728-23	-	-


AFTERMARKET RANGE OF RELAYS

MICRO MAKE & BREAK

30A 12V SEALED WITH DIODE 2 x 6.3MM & 2 x 4.8MM TERMINALS


Relay micro make/break 30A 12V sealed with diode.

PART NO.	DESCRIPTION	QTY
0-727-51	12V, 30A, with diode	10
3-727-51	12V, 30A, with diode	100



MICRO CHANGE-OVER


20/30A 12V WITH DIODE 2 x 6.3MM & 3 x 4.8MM TERMINALS



Relay micro change-over 20/30A 12V with diode.

PART NO.	DESCRIPTION	QTY
0-728-31	12V, 20/30A, with diode	10
3-728-31	12V, 20/30A, with diode	100

10/20A 24V WITH DIODE 2 x 6.3MM & 3 x 4.8MM TERMINALS





Relay micro change-over 10/20A 24V with diode.

PART NO.	DESCRIPTION	QTY
0-728-30	24V, 10/20A, with diode	10
3-728-30	24V, 10/20A, with diode	100

MINI MAKE & BREAK



FUSED 15A 24V 4 x 6.3MM TERMINALS



Relay mini make/break fused 15A 24V.

PART NO.	DESCRIPTION	QTY
0-726-30	24V, 15A, fused	10
3-726-30	24V, 15A, fused	100



20A 24V 4 x 6.3MM TERMINALS



Relay mini make/break 20A 24V.

PART NO.	DESCRIPTION	QTY
0-727-52	24V, 20A	10
3-727-52	24V, 20A	100

40A 12V 4 x 6.3MM TERMINALS



Relay mini make/break 40A 12V.

PART NO.	DESCRIPTION	QTY
0-727-53	12V, 40A	10
3-727-53	12V, 40A	100




WE'RE ON SOCIAL MEDIA FOLLOW US @DURITELIMITED



RELAYS & FLASHER UNITS RELAYS AFTERMARKET RANGE OF RELAYS


40A 24V 2 X 6.3MM AND 2 X 9.5MM TERMINALS



Relay mini make/break 40A 24V.
2 x 6.3mm and 2 x 9.5mm terminals.

PART NO.	DESCRIPTION	QTY
0-727-54	24V, 40A	10
3-727-54	24V, 40A	100


40A 12V WITH DIODE 4 X 6.3MM TERMINALS



Relay mini make/break 40A 12V with diode.

PART NO.	DESCRIPTION	QTY
0-727-55	12V, 40A, with diode	10

TWIN 5 X 6.3MM TERMINAL 40A 12V




Relay mini make/break twin terminal 40A 12V.

PART NO.	DESCRIPTION	QTY
0-727-56	12V, 40A	10
3-727-56	12V, 40A	100

MINI HEAVY-DUTY MAKE & BREAK

70A 12V 2 X 6.3MM & 2 X 9.5MM TERMINALS

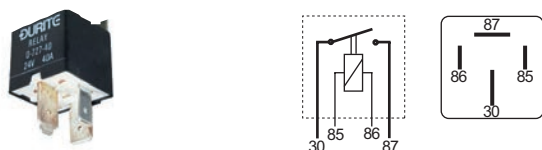

Relay mini heavy-duty make/break 70A 12V.

PART NO.	DESCRIPTION	QTY
0-727-57	12V, 70A	10
3-727-57	12V, 70A	100

SEALED 70A 24V 2 X 6.3MM & 2 X 9.5MM TERMINALS




Relay heavy-duty make/break sealed 70A 24V.

PART NO.	DESCRIPTION	QTY
0-727-58	24V, 70A	10
3-727-58	24V, 70A	100

MINI CHANGE-OVER


15/20A 24V 5 X 6.3MM TERMINALS

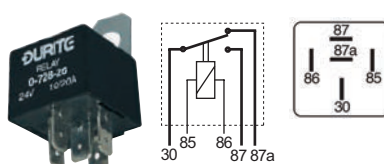

Relay mini change-over 15/20A 24V.

PART NO.	DESCRIPTION	QTY
0-728-32	24V, 15/20A	10
3-728-32	24V, 15/20A	100


30/40A 12V 5 X 6.3MM TERMINALS

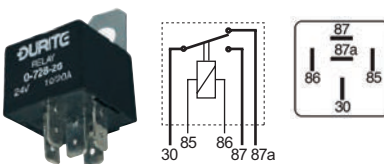

Relay mini change-over 30/40A 12V.

PART NO.	DESCRIPTION	QTY
0-728-33	12V, 30/40A	10
3-728-33	12V, 30/40A	100

30/40A 12V 5 X 6.3MM TERMINALS WITH DIODE

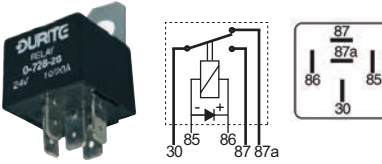


Relay mini change-over 30/40A 12V with diode.

PART NO.	DESCRIPTION	QTY
0-728-34	12V, 30/40A	10
3-728-34	12V, 30/40A	100

RELAYS & FLASHER UNITS RELAYS AFTERMARKET RANGE OF RELAYS

EXTRA HEAVY-DUTY MAKE & BREAK


100A 24V



Relay heavy-duty make/break 100A 24V.

PART NO.	DESCRIPTION	QTY
0-727-59	24V, 100A	1

120A 12V




Relay heavy-duty make/break 120A 12V.

PART NO.	DESCRIPTION	QTY
0-727-60	12V, 120A	1

FLASHER UNITS


UNIVERSAL FLASHER UNITS

Universal pulse generator, 12 or 24V, 1 to 8 x 21W. Negative earth only. There is no bulb failure indication on this unit.



PART NO.	DESCRIPTION	QTY
0-744-00	Universal flasher	1

Universal pulse generator, 12 or 24V, 1 to 8 x 21W. Negative earth only. There is no bulb failure indication on this unit.




PART NO.	DESCRIPTION	QTY
0-744-34	Universal flasher	1

12V FLASHER UNITS



12V 2 x 21 + 5W Popple flasher unit.

PART NO.	DESCRIPTION	QTY
0-606-12	12V, 2 x 21 + 5W	1



12V 2/4 x 21W hazard/flasher unit, low profile case.
Negative earth only.

PART NO.	DESCRIPTION	QTY
0-744-22	12V, 2/4 x 21W	1



12V 2/4 x 21W hazard/flasher unit for Rover vehicles.
Negative earth only.

PART NO.	DESCRIPTION	QTY
0-744-13	12V, 2/4 x 21W	1


RELAYS & FLASHER UNITS FLASHER UNITS 12V FLASHER UNITS

12V FLASHER UNITS

**12V 1-4 x 21W hazard/flasher unit.**


Negative earth only. There is no bulb failure indication on this unit.

PART NO.	DESCRIPTION	QTY
0-606-11	12V, 1-4 x 21W	1


**12V 2/4 x 21W hazard/flasher unit.**

Negative earth only.


PART NO.	DESCRIPTION	QTY
0-744-12	12V, 2/4 x 21W	1

**12V 2 + 1 + 1/8 x 21W hazard/flasher unit for tractors towing one or two trailers. Negative earth only.**

PART NO.	DESCRIPTION	QTY
0-744-16	12V, 2 + 1 + 1/8 x 21W	1


**12V 4 x 21 + 5W Popple hazard unit.**

PART NO.	DESCRIPTION	QTY
0-606-50	12V, 4 x 21 + 5W	1


**12V 1-6 x 21W hazard/flasher unit.**

Negative earth only. There is no bulb failure indication on this unit.


PART NO.	DESCRIPTION	QTY
0-744-11	12V, 1-6 x 21W	1

**12V 2/4 x 21 hazard/flasher unit. Electronic unit replacing hot wire type, without earth.**


PART NO.	DESCRIPTION	QTY
0-606-00	12V, 2/4 x 21	1

**12V 2/4 x 21W hazard/flasher unit. Negative earth only.**


PART NO.	DESCRIPTION	QTY
0-744-38	12V, 2/4 x 21W	1

**12V 2 + 1/6 x 21W caravan hazard/flasher unit. Negative earth only.**


PART NO.	DESCRIPTION	QTY
0-744-62	12V, 2 + 1/6 x 21W	1

**LED flasher unit 12V 0.02A - 20A.**

PART NO.	DESCRIPTION	QTY
0-744-10	12V, 0.02A-20A	1

**12V 2 + 1/6 x 21W caravan hazard/flasher unit. Negative earth only. C2 and 31 terminals on top.**


PART NO.	DESCRIPTION	QTY
0-744-37	12V, 2 + 1/6 x 21W	1

**12V 2 + 1/6 x 21W caravan hazard/flasher unit. Negative earth only.**

PART NO.	DESCRIPTION	QTY
0-744-36	12V, 2 + 1/6 x 21W	1


RELAYS & FLASHER UNITS FLASHER UNITS 12V FLASHER UNITS

24V FLASHER UNITS




24V 2/4 x 21W hazard/flasher unit.
Negative earth only.

PART NO.	DESCRIPTION	QTY
0-744-24	24V, 2/4 x 21W	1




24V 2+1/6 x 21W hazard/flasher unit.
Negative earth only.

PART NO.	DESCRIPTION	QTY
0-744-44	24V, 2+1/6 x 21W	1




24V 1-6 x 21W hazard/flasher unit.
Negative earth only. There is no bulb failure indication on this unit.

PART NO.	DESCRIPTION	QTY
0-744-23	24V, 1-6 x 21W	1



24V 3+1/8 x 21W hazard/flasher unit.
Negative earth only.

PART NO.	DESCRIPTION	QTY
0-744-54	24V, 3+1/8 x 21W	1



24V 2/4 x 21W hazard/flasher unit.
Negative earth only.

PART NO.	DESCRIPTION	QTY
0-744-25	24V, 2/4 x 21W	1



24V 2 + 1/6 x 21W hazard/flasher unit. Negative earth only.


PART NO.	DESCRIPTION	QTY
0-744-26	24V, 2 + 1/6 x 21W	1



Durite offers relays for both 12V and 24V vehicles, including "made-to-order" programmable timer relays. Durite relays are renowned for their high performance, overall quality, reliability and cover over 95% of applications.

SOCKETS


SOCKETS FOR RELAYS AND FLASHER UNITS



Bulkhead socket for micro relays.

- Accepts up to 2 x 2.8mm 3 x 4.8mm and 2 x 6.3mm terminals
- Can be gang mounted
- Supplied with locking terminals


PART NO.	DESCRIPTION	QTY
0-729-03	Bulkhead socket	1
2-729-03	Bulkhead socket	10
3-729-03	Bulkhead socket	100



Universal flying socket for flasher units and relays.

- Accepts up to 5 x 6.3mm terminals
- Supplied with locking terminals


PART NO.	DESCRIPTION	QTY
0-729-02	Universal	1



Bulkhead socket for flasher units and relays.

- Accepts up to 4 x 2.8mm and 5 x 6.3mm terminals
- Can be gang mounted
- Supplied with locking terminals


PART NO.	DESCRIPTION	QTY
0-729-00	Bulkhead socket	1
2-729-00	Bulkhead socket	10
3-729-00	Bulkhead socket	100



Bulkhead socket for controllers, flasher units and relays.

- Accepts up to 4 x 2.8mm, 3 x 6.3mm and 2 x 9.5mm terminals
- Can be gang mounted
- Supplied with locking terminals

PART NO.	DESCRIPTION	QTY
0-729-01	Bulkhead socket	1
3-729-01	Bulkhead socket	100



Bulkhead socket for controllers and heavy-duty relays.

- Accepts up to 4 x 2.8mm, 2 x 6.3mm and 3 x 9.5mm terminals
- Can be gang mounted
- Supplied with locking terminals

PART NO.	DESCRIPTION	QTY
0-729-04	Bulkhead socket	1
3-729-04	Bulkhead socket	100

RELAY BOXES

RELAY HOLDERS

4-way mini relay holder.

- Relay box for 4x mini relays
- Supplied with mounting feet, cover and terminals.
- Can be clipped together with fuse box 0-234-66 and relay holder 0-729-06



Q SEE ALSO: Fuse Box 0-234-66 on page 191.

PART NO.	DESCRIPTION	QTY
0-729-05	Mini relay holder	1

7-way micro relay holder.

- Relay box for 7x micro relays
- Supplied with mounting feet, cover and terminals.
- Can be clipped together with fuse box 0-234-66 and relay holder 0-729-05



PART NO.	DESCRIPTION	QTY
0-729-06	Micro relay holder	1

08

REPLACEMENT COMPONENTS



SOLENOIDS	256
REGULATORS	258
ALTERNATOR CONNECTOR	258
GLOW PLUGS	259
GLOW PLUG CONTROLLERS	263

**AN EXTENSIVE RANGE
ON OFFER TO COVER
YOUR VEHICLE NEEDS.**



SOLENOIDS

UNIVERSAL SOLENOIDS

FOOT OPERATED SOLENOID



Replaces SW-4001, 4005,
4010, 4015, 4201

PART NO.	DESCRIPTION	QTY
0-335-50	Foot operated solenoid	1

MAKE AND BREAK SOLENOID, 150A



- Rated at 150A continuous for a maximum of 4 hours and 800A for 5 seconds
- M8 and M5 studs
- Protected to IP65
- Splash proof

PART NO.	DESCRIPTION	QTY
0-335-38	12V solenoid	1
0-335-39	24V solenoid	1

MAKE AND BREAK SOLENOID, 150A & 100A



- Isolated return
- Rated at 150A continuous at 12V
- Rated at 100A at 24V

PART NO.	DESCRIPTION	QTY
0-335-06	12V, rated at 150A	1
0-335-07	24V, rated at 100A	1

MAKE AND BREAK SOLENOID, 80A & 50A



- Isolated return
- Rated at 80A intermittent at 12V
- Rated at 50A at 24V
- This solenoid is not waterproof

PART NO.	DESCRIPTION	QTY
0-335-46	12V, rated at 80A	1
0-335-47	24V, rated at 50A	1

CHANGE OVER/REVERSING SOLENOID, 80A & 50A



- Isolated return
- Rated at 80A intermittent at 12V
- Rated at 50A at 24V
- This solenoid is not waterproof

PART NO.	DESCRIPTION	QTY
0-335-56	12V rated at 80A	1
0-335-57	24V rated at 50A	1

CHANGE OVER/REVERSING SOLENOID, 100A



- Isolated return
- Rated at 100A intermittent at 12V
- M8 studs and 6.3mm blade terminals

PART NO.	DESCRIPTION	QTY
0-335-58	12V	1
0-335-59	24V	1

STARTER SOLENOIDS

12V SOLENOID



Lucas 76411, 76415, 76417, 76425,
76426, 76445, 76450,
76460, 76464, 76465,
76766, 76470, 76471,
76485, 76486, 76703,
76772, 76776, 4ST, SRB325

PART NO.	DESCRIPTION	QTY
0-335-00	12V solenoid	1



Lucas 76497, 76770, 76771,
76986 (Cold start)

PART NO.	DESCRIPTION	QTY
0-335-01	12V solenoid	1



Lucas 76795, 76789, 4ST,
SRB335 (Cold start)

PART NO.	DESCRIPTION	QTY
0-335-02	12V solenoid	1

REPLACEMENT COMPONENTS SOLENOIDS

24V SOLENOID

Lucas 76735, 76775, 76783,
76788, 76844, SRB322,
SRB323, SRB349, SRB350,
SRB351



PART NO.	DESCRIPTION	QTY
0-335-08	24V solenoid	1

24V SOLENOID WITH MANUAL BUTTON

- 24V
- Isolated return

Lucas 76732, SRB321



PART NO.	DESCRIPTION	QTY
0-335-04	24V solenoid	1

12V SOLENOID WITH MANUAL BUTTON

- 12V
- Isolated return

Lucas 76731, SRB319



PART NO.	DESCRIPTION	QTY
0-335-05	12V solenoid	1

STOP/ADVANCE SOLENOIDS

STOP/ADVANCE SOLENOID

Thread M14 x 1.5
12V Solenoid
Replaces CAV 7167.620B,
7185-900W,
9145.040D, SRB850
Rotodiesel 9009.026B,
034,041,049



PART NO.	DESCRIPTION	QTY
0-129-01	12V	1

Thread M14 x 1.5
12V Solenoid
Replaces CAV 7167.620A,
7185-900W, SRB852
24V Solenoid
Replaces CAV 7180.049A,
7185-900K



PART NO.	DESCRIPTION	QTY
0-129-03	12V	1
0-129-27	24V	1

Thread M14 x 1.5
Replaces CAV 9108.073A,
7185.900W.
SRB851, SRB854.
(eco diesel)



PART NO.	DESCRIPTION	QTY
0-129-06	12V	1

Thread M14 x 1.5
12V Solenoid
Replaces CAV 7167.620C,
7167.620D,
7185-900T, SRB853
24V Solenoid
Replaces CAV 7180.049C,
7180.049D,
7185-900P



PART NO.	DESCRIPTION	QTY
0-129-04	12V	1
0-129-28	24V	1

Thread M14 x 1.5
12V Solenoid
Replaces CAV 9185.900G.
SRB855
24V Solenoid
Replaces CAV 9185.900H



PART NO.	DESCRIPTION	QTY
0-129-08	12V	1
0-129-32	24V	1

Thread M24 x 1
12V Solenoid
Replaces Bosch 0.330.001.015,
018, 025
Diesel KiKi
146650-1220, 0720
CAV 7240.5, 7240-112
24V Solenoid
Replaces Bosch 0.330.001.016.
Diesel KiKi 146650-1320.
CAV 7240.6, 7240-224



PART NO.	DESCRIPTION	QTY
0-129-02	12V	1
0-129-26	24V	1

REPLACEMENT COMPONENTS SOLENOIDS

STOP/ADVANCE SOLENOID



Thread M24 x 1
Replaces Bosch 0.330.001.028



Thread M24 x 1
12V Solenoid
Replaces Nippon-Denso
096010.0500,
096030.0160
Diesel KiKi
146650-1220, 0720
CAV 7240.5



Replaces
CAV 9108.152A

Thread
M12 x 1.25

Terminals Junior
timer

PART NO.	DESCRIPTION	QTY	PART NO.	DESCRIPTION	QTY	PART NO.	DESCRIPTION	QTY
0-129-11	12V	1	0-129-05	12V	1	0-129-21	12V	1

REGULATORS

MECHANICAL REGULATORS

FOR 12V 22A GENERATOR



Lucas RB340, 37207, 279, 292, 297,
299, 304, 330, 334, 336, 342,
344, 346, 452, 367, 368, 391,
392, 451, 471, 472, 477, 528,
529, 542, 543, 544, 547, 559,
562, 563, 568, 569, 570, 571,
572, 573, 574, NCB 130, 131,
132
Ford 622E-10505A, B,
3004R-10505A, B,
C5NF-1050B

PART NO.	DESCRIPTION	QTY
0-833-00	Mechanical regulator for 12V 22A generator	1

FOR 12V 25A GENERATOR



Lucas RB106, 37066, 139,
179, 183, LRC105, NCB
101
Ford 105E-10505B

PART NO.	DESCRIPTION	QTY
0-833-06	Mechanical regulator	1

ALTERNATOR CONNECTOR

ACR ALTERNATOR 3 PIN CONNECTOR



Lucas 54960402
• Supplied with terminals

PART NO.	DESCRIPTION	QTY
0-845-03	ACR alternator 3 pin connector supplied complete with terminals	5

GLOW PLUGS

VEHICLE APPLICATIONS

MODEL/ENGINE	YEAR	PART NO.
ALFA-ROMEO		
Alfa 6 2.5TD	83 - 87	0-130-52
Alfa 33 1.8TD	86 - 94	0-130-52
Alfa 75 2.0TD	85 - 92	0-130-52
Alfa 75 2.4TD	88 - 92	0-130-52
Alfa 90 2.4TD SUPER	84 - 87	0-130-52
Alfa 164 2.5TD	87 - 92	0-130-52
Alfetta 2.0TD	79 - 83	0-130-52
Alfetta 2.4TD	83 - 84	0-130-52
Guilietta 2.0TD	83 - 85	0-130-52
BEDFORD		
Brava Pick-up 2.2D, 2.5D (Isuzi)	88 >	0-130-85
KB Pick up 2.0D	80 - 89	0-130-85
Midi Van 2.0D (Isuzi)	> 88	0-130-85
CATERPILLAR		
B15, 25FLT, B10, 12FLT, 510PFLT	12V	0-131-54
CHRYSLER/JEEP		
Renegade 2.1D (Isuzi)	83 >	0-130-85
CJ5 - CJ7 (Isuzi)		0-130-85
DAIHATSU		
Delta 24V B, 3B	83 >	0-130-21
FIAT		
Ducato 10D 2.0	87 - 94	0-130-01
FORD		
Econovan 2.0D	85 >	0-130-26
FREIGHT ROVER/LDV		
Boxer 12V		0-131-54
Marina Van 1.5D	83 - 89	0-130-12
Marina Van 1.8D	83 >	0-130-12
Redline 340FG, 350FG		0-130-12
Sherpa Van 1.5D	83 >	0-130-12
Sherpa Van 1.8D	83 >	0-130-12
Tractor 1.5		0-130-12
HINO/RANGER		
Ranger 24V B, 3B 3.0, 3.4	78 >	0-130-21
INTERNATIONAL		
125, 454, 2454, 3400A, 474, 544, 574	70 >	0-131-50
2400, 2500, 3400	71 >	0-131-50
3500 Loader, 3500GD	73 >	0-131-50
ISEKI (Mitsubishi-Kyoto Engines)		
12, 13, 14, KA2S, 2B, 2C		0-130-75
K3 A, B, C, D, E, F, H, M, K4 A, B, C, D, E, F		0-130-75
KE55, 70, 70L, 75, 75L, 80, 85, 95, 130		0-130-75
ISUZU		
Elf 150 C190, C240 12V	70 - 84	0-130-85
Elf 250 C240, 4BA1, 4BC1 12V	70 - 84	0-130-85
Fargo	81 - 82	0-130-85
Hipack	83 - 87	0-130-85
Rodeo C190, C223	79 >	0-130-85
Trooper 2.3TD	81 - 90	0-130-85
JOHN DEER		
Tractors 2840, 3030, 3130 (6 Cyl)	12V	0-131-50

MODEL/ENGINE	YEAR	PART NO.
Combine MB955, 965, 975, 985 (6 Cyl)	12V	0-131-50
KOMATSU		
Bulldozer 4D105, 4D92 (4 Cyl)	24V	0-130-21
Payloader	12V	0-131-54
KUBOTA		
3602DT, KH-20, L2601, L4202 (4 Cyl)	12V	0-130-81
KH-11H, KH-12FD, L235, L305 (3 Cyl)	12V	0-130-81
RC 20 FD (3 Cyl)	12V	0-130-81
B1902DT, B6100, B7001, B7100 (3 Cyl)	12V	0-130-65
B5100, NX1100, NX1300, NX1800(2 Cyl)	12V	0-130-65
KH-8, L2002, L1802, L2202, L2402(3 Cyl)	12V	0-130-65
L2602, L2802, L3202, L4202DT (4 Cyl)	12V	0-130-65
L275, NX1500, RC-15FD (3 Cyl)	12V	0-130-65
M4950 (6 Cyl)	12V	0-130-65
RC-20, RC-25, RC-8FD (2 Cyl)	12V	0-130-65
LAND ROVER		
88 2.2D	77 - 83	0-131-02
109 2.6D	77 - 83	0-131-02
88 2.5D	86 - 90	0-130-52
90, 110 County 2.5TD	89 >	0-130-52
Range Rover 2.4TD	86 - 89	0-130-52
LEYLAND		
245 2.5	73 >	0-131-57
Boxer Bx	12V	0-131-54
FK tractor shovel	12V	0-131-54
Ford truck	12V	0-131-54
Readline 220, 240, 340FG, 350	12V	0-130-12
Road Roller GC4, GN, GR	12V	0-131-54
Road Roller GRY, GRT	12V	0-131-57
Road Roller PR2, PR15, PRT	12V	0-131-54
Sherpa 1.5D, 1.8D	12V	0-130-12
Dumper SY4, 5, 6, 7	12V	0-131-57
TR Range, TR3	12V	0-131-54
TS 200 Tractor shovel	12V	0-131-57
MAZDA		
323 1.7D	86 - 96	0-130-26
929	80 >	0-130-26
B 2.2 12V	84 >	0-130-26
Capella (RF)	83 >	0-130-26
E 2.2 (R2)	84 - 88	0-130-26
J80 (RF)	83 >	0-130-26
MPV 2.5TD	96 >	0-130-26
Spectron (RF)	83 >	0-130-26
Titan 12V (XA)	80 >	0-130-26
T 2.5, 3.0, 4.1 12V (XA)	80 >	0-130-26
Light Bus Parkway 12V (HA)	80 >	0-130-26
MERCEDES BENZ		
309D 3.0D, 409D 3.0D	82 - 89	0-130-01
MITSUBISHI		
Bobcat MM35	12V	0-130-75
Delica (4D56)	93 - 94	0-130-26
Pajero 2.5TD Intercooler	93 - 99	0-130-26
MITSUBISHI Industrial Engines		
12, 13, 14, KA2(S), 2B, 2C		0-130-75
K3A, B, C, D, E, F, G, H, M		0-130-75
K3, K4, KE55, 80, 85, 95, 130		0-130-75

REPLACEMENT COMPONENTS GLOW PLUGS VEHICLE APPLICATIONS

MODEL/ENGINE	YEAR	PART NO.
KE70, 70L, 75, 75L		0-130-75
NEW HOLLAND		
Clayson SP818, 1530, 1540-1550	68 >	0-131-54
Clayson M140, M133, M135, M89	68 >	0-131-54
NISSAN		
QGS type 1 = twin relay		
220C 2.0D, 2.2D, 2.3D	68 >	0-130-65
280C 2.0D, 2.2D	68 >	0-130-65
Atlas 12V (SD23, SD25)	82 >	0-130-65
Caball/C340, Civilan 2.2D	67 >	0-130-65
Caball/C340, Clipper 3.0D	80 - 81	0-130-65
Cabstar, Homer 2.2D	76 >	0-130-65
Cedric, Gloria (SD20)	68 - 83	0-130-65
Cedric, Gloria 2.3D (SD23)	84 >	0-130-65
Datsun Truck 12V (SD22, 23, 33)	68 >	0-130-65
E20, E23, E24 2.2D 12V	78 >	0-130-65
E20, E23, E24 2.3D (SD23 QGS Type1) 12v	82 >	0-130-65
F22 2.5D 12V (SD25)	81 >	0-130-65
H40 12V (SD25)	> 81	0-130-65
	81 >	0-130-65
Junier 12V (SD22, 25)	68 >	0-130-65
Laurel 2.0D (SD20)	78 - 80	0-130-65
Patrol 3.2D, TD	82 >	0-130-65
Pick-up 2.2D 2.3D	78 >	0-130-65
Pick-up 2.5D (SD25)	83 >	0-130-65
Urvan 2.2D 12V	78 >	0-130-65
Urvan 2.3D 12V (SD23)QGS Type1	82 >	0-130-65
NISSAN Fork Lift:		
NSF01A, SF01A Series 12V (SD15)		0-130-65
CEF02A Series 12V (SD22, SD25)		0-130-65
QF01A, QF02A Series 12V (SD22)	> 80	0-130-65
QF01A, QF02A Series 12V (SD22)	81 >	0-130-65
EF02 Series 12V (SD25)		0-130-65
EF02A Series 12V (SD25)		0-130-65
FD005, 006, 007 Series 12V (SD33)		0-130-65
F02, 03 Series 12V (SD33)		0-130-65
F22, H40 12V (SD25)		0-130-65
H01, NH01 12V (SD15)		0-130-65
H01, H02, 12V (SD25)		0-130-65
NH02 12V (SD15T)		0-130-65
QF01, 02, QGF02 Series 12V (SD22, SD25)		0-130-65
NISSAN General Purpose Engines:		
Condol 12V (SD22)		0-130-65
12V (SD23)		0-130-65
12V (SD25)		0-130-65
NISSAN Marine Engines:		
12V (SD33)		0-130-65
OPEL		
Kadett E 1.5D Isuzu	84 - 91	0-130-85
Senator 2.3D, 2.3TD	81 >	0-130-01
PERKINS		
4-108	12V	0-131-54
Fork Lift Truck D3-152, 4-107	70 >	0-131-54
Beet Harvester P3-359, P4-459, P6-659	70 - 71	0-131-53
.4-99,-107,-108,-192,-203,-236	70 - 71	0-131-54
3-144,-152, 6P288, 305, 6-354	70 - 71	0-131-54
6-372 (TA)	70 - 71	0-131-54
Fork Lift Truck/Industrial DFG4L 4-236	70 >	0-131-54
General 6-354, T6-354, 6-354(1), 4-108(V)	69 >	0-131-54

MODEL/ENGINE	YEAR	PART NO.
Inc. Marine H6-354(M), 4-108(M)	69 >	0-131-54
Industrial 4-248(1), 6-372	71 >	0-131-54
Industrial 6-354.2	70 - 71	0-131-54
Industrial A4-248, D4-203(1)	70 >	0-131-54
Refrigeration Unit 4-107(A)	69 >	0-131-54
PEUGEOT		
106 1.5D (TUD5) 2.1, 2.3	94 >	0-130-85
ROVER		
825 2.5D	88 - 91	0-130-52
Marina 1.5D	71 - 82	0-130-12
SDI 2.4STD	82 - 86	0-130-52
SEAT		
Alhambra 1.9TDi (cooling water heater)	95 >	0-132-02
SSANG YONG		
Korando 2.2D	88 - 96	0-130-85
SUZUKI		
Vitara 2.0TD	94 - 98	0-130-26
TOYOTA		
Aygo 1.4HDI 24V (2H)	82 >	0-130-21
24V (13B)	93 >	0-130-21
24V (B, 2B, 3B)	72 - 89	0-130-21
24V (1HZ)	94 >	0-130-21
24V (3B, 1HD-T)	98 >	0-130-21
Dyna 2.0D 24V	80>	0-130-21
Dyna 3.0D 24V (B/11B)	93>	0-130-21
Dyna 3.7D 24V (141B)	93>	0-130-21
Hiace 3.0D, 3.7D 24V (B/11B,14B)	93 >	0-130-21
Landcruiser 2.4D 24V	79 - 81	0-130-21
Landcruiser 3.4D 24V	80 - 88	0-130-21
Landcruiser 4.0D 24V	82 - 89	0-130-21
Landcruiser 4.2D,TD 24V	95 >	0-130-21
Toyo-Ace 2.5D 24V (2J)	82 >	0-130-21
Toyo-Ace 24V (B)	80 - 82	0-130-21
Truck 24V (D, 2D)	77 >	0-130-46
VAUXHALL		
Astra 1.5E D Isuzu 4 EC 1	84 - 91	0-130-85
Brava 2.2D Pick-up (Isuzu)	91 - 97	0-130-85
Corsa 1.5D Isuzu 15D/4 EC1 AAD	87 - 93	0-130-85
Nova 1.5D Isuzu 804795>	87 - 93	0-130-85
VM		
HR294HP	87 >	0-130-52
HR392SHTR	86 - 87	0-130-52
HR394H, HT, HPT	84 - 87	0-130-52
HR488HI2R	85 >	0-130-52
HR488HT2R	79 - 85	0-130-52
HR492HIM, HR492HIR	84 - 87	0-130-52
HR492HIRR	86 >	0-130-52
HR492HT9	80 >	0-130-52
HR494H	84	0-130-52
HR494HPT	85 >	0-130-52
HR494HT	84 - 86	0-130-52
HR494HT10	86 >	0-130-52
HR588HTT, HR588HIW	85 >	0-130-52
HR594H, HT	84 >	0-130-52
HR692HIW	85 >	0-130-52
HR692HT9	81 >	0-130-52
HR694HT	84 >	0-130-52
HR694HT10	86 >	0-130-52

REPLACEMENT COMPONENTS GLOW PLUGS VEHICLE APPLICATIONS

MODEL/ENGINE	YEAR	PART NO.
492.4 SHIR	87 >	0-130-52
VOLVO		
V90 3.6F407/408	78 - 86	0-130-52
YANMAR		
Combine (3 Cyl)	12V	0-130-65
Construction machine (3 Cyl)	12V	0-130-65
Generator (3 Cyl)	12V	0-130-65
Tractors (3, 4 Cyl)	12V	0-130-65

MANUFACTURER CROSS REFERENCE

PART NO	BERU	BOSCH	CHAMPION	LUCAS	MARELLI	NGK	NIPPON DENSO	HKT
0-130-12	112M, GV112	0.250.200.035	CH 32	HDS227		Y-302		B-055
0-130-21	895, 969MJ, GV895, 969	0.250.202.012, 076, 097, 119	CH104	HDS236 HDS237 HDS238 HDS242		Y-178, T Y-197R, T	067100-1161, 1220, 1340, 1360, 1460, 1700	PT94, 101, 108, 109, 141, 149, 153
0-130-26	705MJ, GN023, GV705, 819	0.250.202.007, 056, 088, 089, 092, 106	CH97	HDS241 HDS272		Y-107R, T, V Y-172 Y-701J, R, U		PM 164 PS 203, 205 PZ 30, 33, 34 35, 37, 38, 39
0-130-52	657MJ, GV657	0.250.200.049, 053 0.250.201.012, 014, 034	CH62 CH70	HDS266 HDS267 HDS278	TIX6A, 7A, UX7A	Y-909R		B 049
0-130-65	889, 892, 920MJ, GV889, 892, 920	0.250.202.014, 015, 016, 017, 077, 110	CH102 CH129 CH161	HDS239 HDS243 HDS248 HDS256 HDS257 HDS280 HDS283		Y-03X Y-103, K, V Y-103-1, -2 Y-112M-1, R, R-1, T Y-702R, U Y-705RS		PN 81, 85, 86, 87, 123, 128, 132 PS 201, 202, 210
0-130-75			CH144			Y-110, Y-114T	PM 79	
0-130-81						Y-102, 106V, -1, Y-720U	PM 62	
0-130-85	749, 946MJ, GV749, 946	0.250.202.008, 011, 085	CH157 CH110	HDS247 HDS249 HDS302 HDS345		Y-104, R Y-154R Y-710R		PI 42, 45, 46, 47, 48, 55, 58
0-131-02	220G, 219CG, GD220	0.250.002.009	CH45	HDS317				
0-131-50				1854106				
0-131-53				1854040				
0-131-54	154GS, 154GSF, GF154	0.257.100.009	CH139	1854050	CTZ5U			
0-131-57		0.257.100.010	CH139	1854102	CTZ 6U			

GLOW PLUGS SPECIFICATIONS

PART NO.	NUT	THREAD	PRE-HEAT (S)	VOLTS	BODY L	ELEMENT L
0-130-12	17mm	M10 x 1.00	17	12	97	28
0-130-21	12mm	M10 x 1.25	6	24	95	28
0-130-26	12mm	M10 x 1.25	6	12	81.5	22.5
0-130-52	12mm	M12 x 1.25	6	11	74	28
0-130-65	12mm	M10 x 1.25	6	12	65.5	18
0-130-75	12mm	M10 x 1.25	6	10.5	81	22.5
0-130-81	12mm	M10 x 1.25	12	12	68.5	16
0-130-85	12mm	M10 x 1.25	6	12	86.5	24
0-131-02	17mm	M14 x 1.25	17	1.7	101	19

HEATER PLUGS SPECIFICATIONS

PART NO.	NUT	THREAD	CM ³ /MIN	VOLTS	TERMINATION	OEM
0-131-50	24mm	7/8" X 14 UNF	7-10	12	3/8" blade	Lucas
0-131-53	24mm	1/2" BSP	7-12	11.5	10 x 32UNF	Lucas
0-131-54	24mm	7/8" X 14 UNF	3.5-5	11.5	10 x 32UNF	Lucas
0-131-57	24mm	7/8" X 14 UNF	3.5-5	11.5	3/8" blade	Lucas



LOOKING FOR A BATTERY ISOLATOR SWITCH? WE OFFER A WIDE RANGE INCLUDING SINGLE AND DOUBLE POLE, CHANGE-OVER, MARINE AND MORE..

SEE PAGES 102-106 FOR MORE INFORMATION.



GLOW PLUG CONTROLLERS

GLOW PLUG CONTROLLERS

PRE-HEAT TIME < 14 SECONDS

Bosch 0333402501 | **Cartier** 02386 | **Citroen** 598113, 9549299580, 95534787 | **Ferrari** 311609 | **Hella** 4RV008188081 | **Lucas** HDC101 | **Magneti-Marelli** REP1A | **Nagares** TPD1212 | **Paris Rhone** 102180M, 105857 | **Peugeot** 598110, 598113, 7920076593, 9250883280, 9250888280 | **Rover** PRC5020 | **Seim** 0587900 | **Valeo** 245600, 73100122, 73101002


PART NO.	DESCRIPTION	QTY
0-133-01	12V - Pre-heat time < 14 seconds	1



PRE-HEAT TIME < 8 SECONDS

Bosch 0.333.402.509, 517, 524, 0.250.201.952 | **Cartier** 02394 | **Citroen** 598115, 91515869, 9151586980, 92515867, 92515869 | **Fiat** 4792112, 5990986 | **Hella** 4RV008188091 | **Iveco** 4792112, 9462703 | **Lucas** HDC102, HDC120 | **Nagares** TPD512 | **Paris Rhone** 102696 | **Peugeot** 598111, 598115, 9151586980, 9251586980/86780 | **Seat** 0581CR1, 0581CR01 | **Seim** 06421900 | **Talbot** 9151586980, 9251586780/980, B515867, 9121586980, 598111 | **Valeo** 245603, 73103402, 102696, 73105002



PART NO.	DESCRIPTION	QTY
0-133-02	12V - Pre-heat time < 8 seconds	1



PRE-HEAT RELAY, TIME < 11 SECONDS WITH POST HEAT

Alfa Romeo 9619039780, 9639912580 | **Cartier** 51299011A, 51299037 | **Citroen** 598143 | **Fiat** 9619039780, 9639912580, 1348881080 | **Hella** 4RV008188381 | **Lancia** 9639912580, 9619039780 | **Nagares** CEP/6-12 | **Peugeot** 598125, 598131, 598138, 598143 | **Valeo** 245618

PART NO.	DESCRIPTION	QTY
0-133-29	12V - < 11 seconds with post heat	1



FOR MORE INFO, VISIT WWW.DURITE.CO.UK
OR CONTACT INFO@DURITE.CO.UK


REPLACEMENT COMPONENTS GLOW PLUG CONTROLLERS



PRE HEAT TIME < 8 SECONDS

Ford 6143688, 83BB6M092AA, AIA, BA, 88BG8B658AA | **GM** 090040992, 090276101, 090228928, 090341822, 90240651 | **Hella** 4RV008188161 | **Lucas** HDC106, HDC108, DSC06, DSC08 | **Opel** 1238532, 1238537, 1238565, 1238627, 90040992, 90228928, 90341822 | **Vauxhall** 090040992, 090228928, 090341822, 091097769, 091108750 | **Volvo** 35601160

PART NO.	DESCRIPTION	QTY
0-133-08	12V - Pre heat time < 8 seconds	1



PRE HEAT TIME < 12 SECONDS WITH POST HEAT

Ford 1630363, 1630263, 6132248, 6171402, 84FB6M092BA, CA, CB, 84FB006M092BA, CA, CB | **Hella** 4RV008188211


PART NO.	DESCRIPTION	QTY
0-133-05	12V - Pre heat time < 12 seconds with post heat	1



PRE-HEAT TIME < 8 SECONDS WITH POST HEAT

Audi/VW 171911261, A, B, C, D, E, 443911261, A, 893911261 | **Beru** 0210010001 | **Bosch** 0250201933, 0333402512 | **Hella** 4RV008188171 | **Lucas** HDC104, DSC04 | **Monark** 90290001 | **Steyr** 71618502101


PART NO.	DESCRIPTION	QTY
0-133-04	12V - Pre-heat time < 8 seconds	1



PRE-HEAT TIME < 7 SECONDS WITH POST HEAT

Audi/VW 191911261A, C, 443911261C, 867911261C | **Beru** 0201010031 | **Bosch** 0281003099, 0333402512 | **Hella** 4RV008188181 | **Lucas** HDC127

PART NO.	DESCRIPTION	QTY
0-133-14	12V - Pre-heat time < 7 seconds	1



REPLACEMENT COMPONENTS GLOW PLUG CONTROLLERS VEHICLE APPLICATIONS

VEHICLE APPLICATIONS

MODEL/ENGINE	YEAR	PART NO.
ALFA ROMEO		
AR 8 35	87 - 89	0-133-01
AR 8 40	78 - 89	0-133-02
AR 8 40	87 - 89	0-133-01
AUDI		
80 1.6D	80 >	0-133-04
80 1.6D	82 - 86	0-133-14
80 1.6TD	82 >	0-133-04
80 1.6TD	91 >	0-133-14
80 1.9D	89 >	0-133-04
90 1.6TD	84 - 91	0-133-04
100 2.0D	78 - 84	0-133-04
100 2.0TD	81 >	0-133-04
100 2.4D	89 >	0-133-04
100 2.5TDI	90 >	0-133-04
BEDFORD		
Astra Van 1.6D	82 - 84	0-133-08
Astra 2 Van 1.6D	84 - 89	0-133-08
Astramax 1.6D	85 - 89	0-133-08
CF2/230 2.3D	84 - 87	0-133-08
CF2/250 2.3D	84 - 87	0-133-08
CF2/280 2.3D	84 - 87	0-133-08
CF2/350 2.3D	84 - 87	0-133-08
CITROEN		
AX 14D	88 >	0-133-02
Berlingo 1.9D	98 >	0-133-29
Berlingo 2.0HDI	99 >	0-133-29
BX17D	85 >	0-133-02
BX17D (161A)	85 >	0-133-01
BX17TD (ABA, AJZ)	88 >	0-133-01
BX17TD	88 >	0-133-02
BX19D	89 >	0-133-01
BX19D (DJZ, D9B)	87 >	0-133-01
BX19D	88 >	0-133-02
C4 Picasso 2.0HDI	07 - 10	0-133-29
C5 2.0HDI, 2.2HDI	01 - 09	0-133-29
C15D	87 >	0-133-02
C15D 1.8 (161A)	87 >	0-133-02
C25 D (CDR93L)	81 >	0-133-01
C25 D1.9	84 - 91	0-133-02
C25D 2.5	87 >	0-133-01
C25D 2.5 turbo	79	0-133-01
C25D 2.5TD	87 >	0-133-01
C32D	80 >	0-133-01
C35D	80 >	0-133-01
C45D	79 >	0-133-01
C8 2.0HDI	02 - 06	0-133-29
CX2500D	78 - 82	0-133-01
CX25D	82 - 92	0-133-01
CX 25TD	87 - 92	0-133-01
Evasion 1.9TD (D8B, DHX)	94 - 02	0-133-29
Evasion 2.0HDI	99 - 02	0-133-29
Jumper 2.2HDI	02 >	0-133-29
Jumpy 1.9D	98 >	0-133-29
Jumpy 1.9TD (U6U)	95 >	0-133-29
Jumpy 1.9TD (D8B)	96 >	0-133-29
Jumpy 2.0HDI	99 - 10	0-133-29
Saxo 1.5D	96 >	0-133-29
Visa 1.7D (1.7)	83 - 86	0-133-02
Visa 1.7D (1.8 161A)	84 - 91	0-133-01
Xantia 1.9D (D9B)	93 - 96	0-133-02
Xantia X1 1.9TD	94 - 98	0-133-29
Xantia 1.9iD	93 - 96	0-133-01

MODEL/ENGINE	YEAR	PART NO.
Xantia X1, X2 1.9TD	94 - 03	0-133-29
Xantia X1, X2 1.9SD	97 - 03	0-133-29
Xantia X2 2.0HDI 109	99 - 03	0-133-29
XM 11TD (2.1 P8A)	92 - 94	0-133-01
XM 2.1D/TD (P9A, PIZ, P8A, PHZ)	89 - 94	0-133-01
XM 2.5TD (THY)	94 - 00	0-133-29
Xsara 1.9D, SD	98 - 05	0-133-29
Xsara 1.9SD (N1)	99 - 02	0-133-29
Xsara 1.9TD	98 >	0-133-29
Xsara 2.0HDI 90	99 - 05	0-133-29
Xsara 2.0HDI 109	05 >	0-133-29
Xsara Picasso 2.0HDI	99 >	0-133-29
ZX 1.9D	91 - 94	0-133-01
Zx 1.9D (D8B)	91 >	0-133-29
FIAT		
127D	81 - 86	0-133-02
131 2.4	82 - 84	0-133-02
131 2.5	83 - 84	0-133-01
Argenta 2500D	83 - 85	0-133-01
Argenta 2500TD (M8144A1)	83 - 85	0-133-01
Croma 2.5D/TD (8144.67, 8144.91.2200)	85 - 89	0-133-01
Croma 2.5	89 >	0-133-02
Ducato 10D	86 - 90	0-133-02
Ducato 14D (8144.67.220)	86 - 90	0-133-01
Ducato 14D 4x4	89 - 94	0-133-02
Ducato 18 Maxi D	86 - 90	0-133-01
Ducato 18 Maxi TD	86 - 90	0-133-01
Ducato 2.0JTD	01 >	0-133-29
Fiorino 1.3D	82 - 98	0-133-01
Fiorino 1.7D (149B 4.046)	88 - 91	0-133-01
Panda 1.3D	86 - 89	0-133-02
Regata 1.7D	83 - 89	0-133-02
Regata 1.9D	84 - 89	0-133-02
Regata 1.9TD	86 - 89	0-133-02
Ritmo 1.7D	82 - 87	0-133-02
Scudo 1.9TD	96 >	0-133-29
Scudo 2.0JTD	95 >	0-133-29
Scudo 2.0D Multijet	06 >	0-133-29
Ulysse 1.9TD, 2.0JTD	95 > 02	0-133-29
Ulysse 2.0D Multijet	06 >	0-133-29
Uno 1.3D	83 - 89	0-133-02
Uno 1.4TD	83 - 89	0-133-02
Uno 1.7D	86 - 89	0-133-02
FORD		
Mondeo 2.2TDCi	04 - 07	0-133-29
IVECO		
Daily, Grinta 30-8 (8140.61.2)	78 - 89	0-133-02
Daily, Grinta 35-8	78 - 89	0-133-02
Daily, Grinta 40-8	83 - 89	0-133-02
LANCIA		
Phedra 2.0JDT	02 >	0-133-29
Zeta 2.0JDT, 2.0D Multijet	99 >	0-133-29
LEYLAND/LDV		
400 2.5D	89 - 96	0-133-02
400 2.5TD	89 - 96	0-133-02
NISSAN		
Santana 1.6TD	84 - 87	0-133-04
Vanette 2.0D	84 - 89	0-133-02
OPEL		

REPLACEMENT COMPONENTS GLOW PLUG CONTROLLERS VEHICLE APPLICATIONS

MODEL/ENGINE	YEAR	PART NO.
Ascona C 1.6D	82 - 88	0-133-08
Astra 1.7DTLF	94 - 98	0-133-01
Astra A1.7D, Van D	91 - 94	0-133-08
Kadett E Combo 1.6D	86 - 89	0-133-08
Kadett E Combo 1.7D	89 - 91	0-133-08
Kadett E 1.6D Van	84 - 89	0-133-08
Kadett E 1.7D Van	89 - 91	0-133-08
Omega A 2.3D Estate	86 - 94	0-133-08
Omega A 2.3TD Estate	86 - 94	0-133-08
Record E 2.3TD	84 - 86	0-133-08
Senator A 2.3D	84 - 87	0-133-08
Senator A 2.3TD	84 - 87	0-133-08
Vivaro Combi, Kasten DI, DTI	01 >	0-130-30
Vivaro Combi, Kasten 2.5DTI	01 >	0-130-30
PEUGEOT		
106 1.5D	00 >	0-133-29
205 1.9D (XUD9)	87 >	0-133-02
205 1.8D Van	85 - 94	0-133-02
206 1.9D	98 - 01	0-133-29
206 2.0HDI 90	99 >	0-133-29
304 1.5D	79 - 80	0-133-01
305 1.9D (XUD9)	82 - 90	0-133-02
306 1.9D (7B, 7E, N3, N5)	98 - 02	0-133-29
306 2.0HDI 90	99 - 04	0-133-29
307 2.0HDI	00 >	0-133-29
308 2.0HDI	07 >	0-133-29
309 1.7D	86 - 93	0-133-02
309 1.9D	86 - 93	0-133-02
405 1.8TD	90 - 92	0-133-02
406 1.9TD (8B, 8E/F)	95 - 04	0-133-29
406 2.0HDI (8B, 8E/F)	99 >	0-133-29
406 2.0HDI 110	05 >	0-133-29
406 2.2HDI	00 - 04	0-133-29
407 2.0HDI	04 - 09	0-133-29
504 1.9D	78 >	0-133-01
504 1.9D Pick-up	79 - 81	0-133-01
504 1.9D Pick-up	79 - 87	0-133-02
504 2.1D	78 - 91	0-133-01
504 2.1D	70 - 81	0-133-02
504 2.3D	78 - 81	0-133-01
504 2.3D Pick-up	84 >	0-133-02
504 2.5D Pick-up	87 >	0-133-02
505 2.3D	79 - 86	0-133-01
505 2.3D	79 - 86	0-133-02
505 2.3TD	81 - 82	0-133-01
505 2.5TD	86 - 93	0-133-01
604 2.3TD	79 - 84	0-133-01
605 2.1TD	92 >	0-133-02
605 2.5TD	94 - 02	0-133-29
607 2.0HDI, 2.2HDI	00 >	0-133-29
806 1.9TD	99 - 02	0-133-29
806 2.0HDI	99 - 02	0-133-29
807 2.0HDI, 2.2HDI	02 - 09	0-133-29
Boxer 2.0HDI	02 >	0-133-29
Expert 1.9D	98 >	0-133-29
Expert 1.9TD (XUD9)	95 >	0-133-29
Expert 1.9TD (222, 224)	96 >	0-133-29
Expert 2.0HDI	00 >	0-133-29
J5 1.9D	87 - 93	0-133-01
J5 2.5D	81 >	0-133-01
J5 2.5TD	87 - 93	0-133-02
J7 2.0D	67 - 78	0-133-01
J7 2.1D	70 - 78	0-133-01
J7 2.3D	78 - 80	0-133-01
J7 2.3D	79 >	0-133-01

MODEL/ENGINE	YEAR	PART NO.
J9 2,1	82 >	0-133-01
J9 2.3	80 - 82	0-133-01
J9 2.3D	80 - 82	0-133-01
J9 2.5	82 >	0-133-01
J9 2.5D	82 >	0-133-01
Partner 19.D	98 >	0-133-29
Partner 2.0HDI	00 >	0-133-29
RENAULT		
Trafic 2.5D	89 - 97	0-133-02
ROVER		
400 418TD	91 >	0-133-02
2400TD	82 - 86	0-133-02
Range Rover 2.4TD	86 - 90	0-133-02
SEAT		
131 2.4	82 - 84	0-133-02
132 D	74 - 82	0-133-02
Cordoba 1.9D	93 >	0-133-04
Ibiza 1.7D	84 - 87	0-133-02
Ibiza 1.7D (Y...)	84 - 93	0-133-02
Malaga 1.7D	85 - 93	0-133-02
Ritmo 1.7D	80 - 82	0-133-02
Ronda 1.7D	82 - 86	0-133-02
Toledo 1.9D	91 >	0-133-04
TALBOT		
Express 2.5TD	87 >	0-133-01
VAUXHALL		
Astra 1.6D	82 - 84	0-133-08
Astra 2 1.6D	84 - 89	0-133-08
Astra 2 1.7D, Van	91 - 94	0-133-08
Astra Belmont 1.7D	89 - 91	0-133-08
Astramax 1.7D	90 - 94	0-133-08
Belmont 1.6D	86 - 89	0-133-08
Carlton 2 2.3D	83 - 86	0-133-08
Carlton 3 2.3TD	91 - 94	0-133-08
Cavalier 2 1.6D	82 - 88	0-133-08
Cavalier 3 1.7D	88 - 95	0-133-08
Frontera 2.3TD	92 - 95	0-133-08
VOLKSWAGEN		
Caddy 1.6	87 >	0-133-04
Caddy 1.6D	82 - 90	0-133-14
California 1.9	90 >	0-133-04
California 1.9D (70)	90 - 97	0-133-14
California 2.4	90 >	0-133-04
California 2.4D (70)	90 >	0-133-14
Caravelle 1.6	82 - 87	0-133-04
Caravelle 1.6TD	85 >	0-133-04
Caravelle.1.6TD SyncroD (70)	85 >	0-133-04
Caravelle 1.7	87 >	0-133-04
Caravelle.2.4D Syncro (70)	92 >	0-133-14
Eurovan 2.4D (70)	92 >	0-133-14
Golf 1.5D	77 - 80	0-133-04
Golf 1.6D	82 - 91	0-133-04
Golf 1.6TD	82 - 91	0-133-04
Golf II1.5D	77 - 80	0-133-14
Golf II1.6D	80 - 91	0-133-14
Golf II1.6TD	88 - 91	0-133-14
Golf II1.9D	91 >	0-133-14
Golf II1.9TD	93 >	0-133-14
Jetta 1.6	82 - 91	0-133-04
Jetta 1.6D	80 - 91	0-133-14

REPLACEMENT COMPONENTS GLOW PLUG CONTROLLERS VEHICLE APPLICATIONS

MODEL/ENGINE	YEAR	PART NO.
Jetta 1.6D	84 - 91	0-133-04
Jetta II 1.6TD	84 - 92	0-133-14
Jetta II 1.6TD	84 - 91	0-133-04
LT 28D	82 - 92	0-133-14
LT 28D	82 - 92	0-133-04
LT 28TD	82 - 92	0-133-14
LT 28 2.4 12 VTD	80 >	0-133-04
LT 31D	82 - 92	0-133-14
LT 31TD	82 - 92	0-133-14
LT 31 2.4 12 VTD	80 >	0-133-04
LT 35D	82 - 92	0-133-14
LT 35TD	82 - 92	0-133-14
LT 35 2.4 12 VTD	80 >	0-133-04
LT 40D	82 - 92	0-133-14
LT 40D	82 - 92	0-133-04
LT 40TD	82 - 92	0-133-14
LT 40TD	82 - 92	0-133-04
LT 40 2.4 12 VTD	80 >	0-133-04
LT 45D	82 - 92	0-133-14
LT 45D	82 - 92	0-133-04
LT 45TD	82 - 92	0-133-14
LT 45TD	82 - 92	0-133-04
LT 45 2.4 12 VTD	80 >	0-133-04
LT 50D	82 - 92	0-133-14
LT 50TD	82 - 92	0-133-14
LT 50 2.4 12 VTD	80 >	0-133-04
LT 55D	85 - 92	0-133-14
LT 55D	85 - 92	0-133-04
LT 55TD	85 - 92	0-133-14
LT 55TD	85 - 92	0-133-04
LT 55 2.4 12 VTD	85 >	0-133-04
Multivan 1.9D	90 - 97	0-133-14
Multivan 1.9D (701)	90 - 97	0-133-04
Multivan 2.4D	90 >	0-133-14
Multivan 2.4D (701)	90 >	0-133-04
Passat 1.5	77 - 80	0-133-04
Passat 1.6	80 >	0-133-04
Passat 1.6D	80 - 82	0-133-14
Passat 1.6	82 - 84	0-133-14
Passat 1.6TD	81 >	0-133-04
Passat 1.6TD	88-93	0-133-14
Passat 1.9	89 >	0-133-04
Passat 1.9D	89-93	0-133-14
Passat 1.9TD	91-97	0-133-14
Passat D 1.5	78-80	0-133-14
PassatTD	82-84	0-133-14
PassatTD 1.6	82-84	0-133-14
Polo 1.3	86-90	0-133-04
Santana 1.6D	81-85	0-133-14
Santana 1.6TD	82 >	0-133-14
Transporter (T2) 1.6D (24, 25)	81-87	0-133-14
Transporter (T2) 1.6D (24, 25)	84-92	0-133-04
Transporter (T2) 1.7D (24,25)	86-90	0-133-14
Transporter (T4) 1.9D (70)	90-97	0-133-14
Transporter (T4) 1.9D (701)	90-97	0-133-04
Transporter (T4) 2.4D (70)	90 >	0-133-14
Transporter (T4) 2.4D (701)	90 >	0-133-04
Vento 1.9D	91 >	0-133-14
Vento 1.9TD	91 >	0-133-04

HIGH QUALITY LED LIGHT BARS

R65, ROBUST AND LOW PROFILE



1FT
2FT
3FT
4FT
5FT



1ft, 4-Bolt Amber LEDs



2ft, 4-Bolt Amber LEDs



3ft, 4-Bolt Amber LEDs



4ft, 4-Bolt Amber LEDs



5ft, 4-Bolt Amber LEDs

“

360° bright light
output

”



2ft, 1-Bolt Amber Lens



1ft, Magnetic, Amber LEDs



1ft, Magnetic, Amber LEDs



**CLEAR OR
AMBER LENS**

**1-BOLT, 4-BOLT OR
MAGNETIC**



RECHARGEABLE

STOP/TAIL/INDICATOR

For full range of Durite light bars, see pages 52–55.



Approved



Dual voltage
12/24V



Waterproof
IP67



Warranty
3 year



Robust
UV resistant lens



10 programmable
flash patterns

09

BATTERY CHARGERS & MAINTENANCE



BOOSTER PACKS	270
BATTERY CHARGERS	272
BATTERY TESTERS	274
BATTERY HYDROMETERS	275
BATTERY MAINTENANCE EQUIPMENT	276

**BRINGING YOU THE
LATEST TECHNOLOGY
FOR A LONG &
CONSISTENT VEHICLE
BATTERY LIFE.**



LI-POLYMER BOOSTER PACKS

START VEHICLES UP TO 16 LITRES

Highly portable, small and compact with a self-contained battery booster that can start 12/24V vehicles in seconds.

- Compatible with both petrol and diesel vehicles
- The latest battery technology – Long & consistent battery life
- Digital battery life display so you know how much power is left
- Charge from Mains or 12VDC lighter socket

12/24V LITHIUM POLYMER BATTERY BOOSTER PACK



- Capacity; 42,000mAh
- Start current; 600A, Peak current; 1500A
- Cycle life; 1,000 times
- Dual USB output- 1 x 2.1A, 1 x 1.0A
- 3W LED work light/SOS light
- LCD display with battery state of charge indicator
- L 250 x W 247 x H 95mm



LCD state of charge display

"Start vehicles up to 16 litres."

PART NO.	DESCRIPTION	QTY
0-649-40	12/24V booster pack	1
0-649-93	UK charger	1

12V LITHIUM POLYMER BATTERY MINI BOOSTER PACK

NEW



- Capacity; 16,000mAh
- Start current; 1000A, Peak current; 2000A
- Cycle life; 1,000 times
- Dual USB output- 5V/9V/12V and 5V/2.1A
- LED work light/SOS light
- Supplied with smart jump leads USB cable & cigarette lighter plug
- L 195 x W 88 x H 38mm



Smart jump leads

"Start petrol vehicles up to 7.0L, and diesel vehicles up to 5.0L."

PART NO.	DESCRIPTION	QTY
0-649-28	12V Mini booster pack	1

12V LITHIUM POLYMER BATTERY MINI BOOSTER PACK



- Capacity; 8,000mAh / 29.6Wh
- Start current; 200A, Peak current; 400A
- Cycle life; 1,000 times
- Dual USB outputs - 5V 2.1A and 5V 1.0A
- Supplied with smart jump leads, USB cable & cigarette lighter plug
- LED torch/SOS light
- L 165 x W 82 x H 35mm



Smart jump leads

"Start petrol vehicles up to 4.0L, and diesel vehicles up to 2.4L."

PART NO.	DESCRIPTION	QTY
0-649-22	12V Mini booster pack	1

12V AUTO STOP COMPRESSOR & BOOSTER PACK

- Capacity; 10,000mAh (37Wh)
- Start current; 400A, Peak current; 800A
- USB 3.0 output - 5V 3A, 9V 2A, 12V 1.5A
- LED work light, SOS light & flash
- Dual LCD display
- Supplied with smart jump leads, USB cable, 2 nozzle adaptors & 1 sports needle
- Air compressor: 120PSI
- 3 pressure units : PSI, BAR and KG/CM2
- Manual or automatic inflation
- L 243.9 x W 67.5 x H 212.9mm

PART NO.	DESCRIPTION	QTY
0-649-45	Booster pack & air compressor	1
0-649-92	USB to USB type C cable	1
0-649-91	Mini smart jump leads	1



PSI

120PSI



Smart jump leads

NEW

"Start petrol vehicles up to 6.0L,
& diesel vehicles 2.0-3.0L."



0-649-70

"Start vehicles up to 16 litres."
10 x 720F super capacitors.



Vehicle battery health status

Diagnoses battery & let you know if you need to replace it



0-649-75

6 x 720F super capacitors.

"Start petrol vehicles up to 6.0L,
and diesel vehicles up to 3.0L."

SUPER CAPACITORS



Intelligent
LCD display



Dual voltage
12/24V



720F
super capacitor

SUPER LIGHT & COMPACT

The super capacitor **harnesses power** from your weak vehicle battery to **push a large amount of current** back into the battery of your vehicle and start the engine.

- LCD state of charge and vehicle battery health status
- LED torch/SOS light
- Supplied with smart jump leads, USB cable & cigarette lighter plug

PART NO.	START CURRENT	PEAK CURRENT	VOLTAGE	CAPACITY	BACK UP BATTERY	USB OUTPUT	DIMENSIONS	QTY
0-649-70	500A	1200A	12/24V	10 x 720F super capacitor	N/A	5V 3A	L 295 x W 220 x H 111mm	1
0-649-75	400A	800A	12V	6 x 720F super capacitor	6000mAh	5V 2A	L 250 x W 120 x H 50mm	1

BATTERY CHARGERS

PLUG TYPE BATTERY CHARGERS & LEAD SET

AUTOMATIC AUTOMOTIVE BATTERY CHARGERS



- For all lead/acid batteries, including sealed for life, gel and maintenance free
- Features: micro chip controlled three stage charging, allowing the charger to be left permanently connected without harming the battery
- Supplied with crocodile clip and leads
- Input 100-240VAC, 50-60Hz

PART NO.	DESCRIPTION	QTY
0-647-02	12V, 2.7A	1
0-647-03	6/12V, 2.7A	1
0-647-04	24V, 1.5A	1

LEAD SET



- DC cord AWG 20 x 1750mm
- One end with 2-pin plug the other with ring terminals, cigarette lighter/DIN plug or crocodile clips
- Compatible with 0-647-02/03/04, 0-647-06/10/55

Item shown 0-647-96.

PART NO.	DESCRIPTION	QTY
0-647-96	With 6.00mm ring terminals	1
0-647-97	With cigarette lighter/DIN plug	1
0-647-99	With crocodile clips	1
0-647-98	With 8.00mm ring terminals	1

BENCH BATTERY CHARGERS

FIXED OUTPUT

6/12V 1A BATTERY CHARGER/MAINTAINER




- Charging 6/12V lead-acid battery only
- Input AC 100V-240V
- Rated current 1A
- Output max 7.2V DC/14.4V DC
- 3 stage charging
- L 125 x 690 x W 720mm
- CE approved



Suitable for 6 or 12V vehicles

PART NO.	DESCRIPTION	QTY
0-647-31	1A	1

6/12V 4A OR 6.5A BATTERY CHARGER/MAINTAINER



9 stage charging

- 6/12V
- Input AC 100V-240V Lead-Acid battery, AGM and Li-Phosphate battery only
- Rated current 4A or 6.5A
- Protected to IP65
- CE approved

Li-phosphate charger.

PART NO.	DESCRIPTION	QTY
0-647-34	4A - L 219 x H 53 x W 90mm	1
0-647-36	6.5A - L 250 x H 65 x W 111mm	1

12/24V 12A BATTERY CHARGER/MAINTAINER



Suitable for 12 or 24V vehicles

Charging and maintenance for 12/24V normal lead-acid, maintenance-free lead-acid, AGM, GEL and 12V Li-phosphate battery.

- 12/24V Battery 12A
- Input AC 100V-240V
- 9 stage charging
- L 219 x H 123 x W 199mm
- CE approved

Li-Phosphate charger.

PART NO.	DESCRIPTION	QTY
0-647-42	12A	1

BATTERY CHARGERS BENCH BATTERY CHARGERS

12V OR 24V AUTOMATIC AUTOMOTIVE BATTERY CHARGER

- For all lead/acid batteries, including sealed for life, gel and maintenance free
- Features: micro chip controlled three stage charging, allowing the charger to be left permanently connected without harming the battery
- On/off switch, detachable wall-mount brackets, supplied with crocodile clips and leads

PART NO.	DESCRIPTION	QTY
0-647-06	12V, 6A	1
0-647-10	12V, 10A	1
0-647-55	24V, 5A	1
0-647-20	12V, 20A, input 100 - 240VAC, 50 - 60Hz	1
0-647-60	24V, 10A, input 100 - 240VAC, 50 - 60Hz	1



HEAVY-DUTY WITH START-ASSIST

12/24V 30A HEAVY-DUTY BENCH START-ASSIST/CHARGER

- With charge timer for professional use
- 'Automatic' or 'Manual' and 'Hi' or 'Low' charge rate options with 100A 'Start-Assist' and thermal auto-reset overload protection
- Powder coated steel case
- Supplied with crocodile clip and leads

PART NO.	DESCRIPTION	QTY
0-648-30	12/24V, 30A	1
0-648-31	110VAC input	1



HEAVY-DUTY TROLLEYS

6/12/24V, 60A START-ASSIST/CHARGER

- With charge timer for professional use
- 'Hi', 'Medium' and 'Low' charge rate options with 12V, 175SA 'Start Assist', voltmeter, ammeter and thermal auto-reset overload protection
- Powder coated steel case, rubber wheels and chromium plated handle
- Supplied with crocodile clip and leads

PART NO.	DESCRIPTION	QTY
0-648-80	60A	1



FOR MORE INFO, VISIT WWW.DURITE.CO.UK
OR CONTACT INFO@DURITE.CO.UK

BATTERY TESTERS

ELECTRONIC TESTERS

BATTERY TESTER WITH PRINTER



Internal
printer



- 12/24V
- Start/charge analyser
- LCD display
- Microprocessor controlled
- Suitable for lead-acid automotive batteries
- Built in 37mm thermal printer
- Voltage tolerance +/- 3%
- CCA tolerance +/- 5%

Suitable for CCA Capacity:

SAE 100 to 1700 IEC 100 to 1000
DIN 100 to 1000 EN 100 to 1700

PART NO.	DESCRIPTION	QTY
0-524-73	12/24V with internal printer	1
0-524-98	Replacement paper rolls	1

DIGITAL BATTERY TESTER



- 12/24V
- Start/charge analyser
- LCD display
- Microprocessor controlled
- Suitable for lead-acid automotive batteries
- Voltage tolerance +/- 3%
- CCA tolerance +/- 5%

Suitable for CCA Capacity:

SAE 100 to 1700 IEC 100 to 1000
DIN 100 to 1000 EN 100 to 1700

PART NO.	DESCRIPTION	QTY
0-524-74	12/24V	1

DISCHARGE TESTERS

6/12V 275A DISCHARGE TESTER



- For use on 6V and 12V lead-acid automotive batteries, up to 120A hours, discharging them at 275A at 8V
- Legs adjust to most sizes of battery
- Instructions for safe use are on the heat shield, which is a non-asbestos material

PART NO.	DESCRIPTION	QTY
0-524-08	Discharge tester	1
0-524-23	Replacement meter	1
0-524-16	Replacement heat shield plate	1

12V 250A 'NOLTEN' DISCHARGE TESTER



- For use on 12V lead-acid automotive batteries up to 120A hours, discharging them at 250A at 9V
- Legs adjust to most sizes of battery
- Instructions for safe use are on the heat shield
- Adjustable meter for easy reading

PART NO.	DESCRIPTION	QTY
0-524-10	Discharge tester	1
0-524-23	Replacement meter	1

12V 500A 'NOLTEN' HEAVY-DUTY DISCHARGE TESTER



- For use on large 12V lead-acid automotive batteries, discharging them at 500A at 9V
- Legs adjust to most sizes of battery
- Tests batteries 90A hours & above
- Instructions for safe use are on the heat shield
- Adjustable meter for easy reading

PART NO.	DESCRIPTION	QTY
0-524-50	Discharge tester	1
0-524-23	Replacement meter	1

BATTERY CHARGERS BATTERY HYDROMETERS

OTHERS

12V DISCHARGE TESTER FOR LEAD-ACID AUTOMOTIVE BATTERIES

Selectable load setting 125A or 250A, and an automatic 10 second test period indicator.

PART NO.	DESCRIPTION	QTY
0-524-00	25A/250A	1



BATTERY HYDROMETERS

HEAVY-DUTY HYDROMETER

'Heavy-duty', designed for large automotive lead acid batteries.

Specific gravity range: 1.100 - 1.400°
Accuracy tolerance: $\pm 0.010^\circ$ SG

PART NO.	DESCRIPTION	QTY
0-060-00	Hydrometer	1
0-060-02	Bulb	1
0-060-06	Float	1
0-060-10	Jacket	1
0-060-19	Spout	1



POPULAR HYDROMETER

'Popular', designed for the smaller automotive lead acid battery, functioning with less than 10cc of electrolyte.

Ministry ref. 6630.99.957.5058
Specific gravity range: 1.150 - 1.350°
Accuracy tolerance: $\pm 0.010^\circ$ SG

PART NO.	DESCRIPTION	QTY
0-059-00	Hydrometer	1
0-059-02	Bulb	1
0-059-06	Float	1
0-059-10	Jacket	1
0-059-19	Spout	1



DURITE DESIGN, MEDIUM

'Durite', designed for medium automotive lead acid batteries.

Specific gravity range: 1.150 - 1.400°
Accuracy tolerance: $\pm 0.010^\circ$ SG

PART NO.	DESCRIPTION	QTY
0-070-00	Hydrometer	1
0-070-02	Bulb	1
0-070-06	Float	1
0-070-10	Jacket	1
0-070-19	Spout	1



LOOKING FOR ANTI-FREEZE
HYDROMETERS?

View products on page 288.



BATTERY CHARGERS BATTERY HYDROMETERS

PRECISION HYDROMETER



'Precision', designed for very accurate work in the battery workshop. Incorporates integral thermometer and special hydrometer float, 1.220 - 1.300° which is the critical range for battery servicing.

Specific gravity range: 1.220 - 1.300°

Accuracy tolerance: $\pm 0.002^\circ$ SG

Thermometer range: 0 - 50°C

PART NO.	DESCRIPTION	QTY
0-472-00	Hydrometer	1
0-472-06	Float	1
0-472-19	Spout	1

DURITHERM WITH CALIBRATION



'Duritherm', designed for use under conditions varying significantly from 15°C, the temperature at which the hydrometer float is accurately calibrated. An integral thermometer with correction chart enables adjusted float readings to be quickly taken.

Specific gravity range: 1.150 - 1.400°

Accuracy tolerance: $\pm 0.010^\circ$ SG

Thermometer range: 0 - 50°C

PART NO.	DESCRIPTION	QTY
0-363-00	Hydrometer	1
0-363-06	Float	1
0-363-10	Jacket	1
0-363-19	Spout	1

BATTERY MAINTENANCE EQUIPMENT

BOX, CLAMPS & CARRIERS

BATTERY BOX



Black PP comes with webbing tie down.

PART NO.		DESCRIPTION	QTY
0-087-40	Small	W 180 x L 275 x H 200mm	1
0-087-45	Large	W 185 x L 325 x H 200mm	1
0-087-55	Extra large	W 230 x L 450 x H 310mm	1

TWO ARM BATTERY CARRIER



- Acid-resisting Balata belt, 25mm wide
- With quick-fix grips to fit terminal posts
- Hooks for flat battery posts

PART NO.	DESCRIPTION	QTY
0-226-00	Battery carrier	1

BATTERY HOLD DOWN CLAMP



- Punched angle bracket 380mm and two threaded J bolts
- 300mm with wing nuts
- Tin plated
- Adjusts to fit all popular sizes of battery

PART NO.	DESCRIPTION	QTY
0-087-75	Battery hold down clamp	1

BATTERY FILLERS & PUMPS

BATTERY FILLER

- 140 ml capacity bulb
- 305mm long PVC tube

Ministry Ref. 6140.99.805.4417

PART NO.	DESCRIPTION	QTY
0-149-00	Battery filler	1



AUTOMATIC BATTERY FILLER

- Dispenses distilled water
- Automatically stops when the correct level of electrolyte is reached in each battery cell
- 1 litre capacity

PART NO.	DESCRIPTION	QTY
0-149-50	Battery filler	1



ACCESSORIES

WIRE BRUSH WITH HARDWOOD HANDLE

3 rows of 35mm long steel bristles.

PART NO.	DESCRIPTION	QTY
0-314-00	Wire brush	1



STANDARD BATTERY POSTS & TERMINALS BRUSH

Brush for cleaning standard battery posts & terminals.

PART NO.	DESCRIPTION	QTY
0-314-50	Brush	1



Durite Battery Chargers & Maintenance range includes jump packs, smart chargers, our own designed battery hydrometers, voltage & battery testers.

WE ARE ON SOCIAL MEDIA

FOLLOW US FOR THE LATEST DURITE PRODUCT INFORMATION



@DuriteLimited

LOOK OUT FOR...

-  Our latest video content showcasing Durite products in action
-  Expert advice on products, regulations and industry trends
-  And our current offers & promotions on Durite products!



"Order what you want,
when you want with our
mobile friendly website"

WWW.DURITE.CO.UK

10

WORKSHOP & TEST EQUIPMENT



POWER TOOLS.....	280
INSPECTION LAMPS	281
WIRING TOOLS	284
TEST EQUIPMENT	287
SOLDERING	290
WORKSHOP POWER.....	293

**TRADITIONAL
& SPECIALIST WIRING
TOOLS, POWER TOOLS
& WORKSHOP
LIGHTING.**



POWER TOOLS

FAST CHARGE 1000NM IMPACT WRENCH 20V 4AH KIT



3 intelligent gear settings



Impact wrench 1/2" Drive 20.0V 4.0Ah

- No load speed: 0-900, 0-1600, 0-1900rpm
- Brushless wrench with reverse/forward function
- 1 hour fast charge
- Impact Rate 0-2300ipm; Max Torque 1000Nm
- Work light
- Full kit supplied with impact wrench, battery and charger in a BMC case
- UKCA, CE, RoHS approved

PART NO.	DESCRIPTION	QTY
0-467-40	Full kit in BMC case	1
0-467-41	Impact wrench with no battery	1
0-467-42	4.0Ah Li-ion battery	1
0-467-43	UK 3-PIN charger	1

NEW

AIR COMPRESSORS

12V PORTABLE TWIN PISTON AIR COMPRESSOR



- 150 PSI max inflation
- Product size: 20 x 24.5 x 9.5cm
- Max voltage: 13.8V. Max Amperage: 23A
- Output volume: 65L/pm, Inflates ordinary car tyre in 3 minutes (>30 PSI)
- Max duty cycle: 40 minutes
- 2.5m battery cord with clamp
- 2 nozzle adapters and 1 sports needle
- Comes with robust carry case
- 5m PU retractable cable and 25cm rubber hose with pressure gauge

PART NO.	DESCRIPTION	QTY
0-674-00	12V Air compressor	1

20V CORDLESS AIR PRESSURE PUMP



Long lasting & powerful



Cordless hand held compressor.

- 20.0V 150PSI Max
- Can pump up a car tyre 205/55/R16 to 32PSI in under 5 minutes
- Supplied with a 2.0Ah Li-ion battery & UK 230V charger
- Charging time 3-5 hours
- Supplied with 2 x nozzle adaptors, 1 x sports needle and a robust carry case

PART NO.	DESCRIPTION	QTY
0-674-20	20V Air compressor	1
0-674-96	Replacement battery for 0-674-20	1
0-674-97	230V UK plug charger	1
0-674-99	230V Euro plug charger	1



LOOKING FOR A BOOSTER PACK WITH BUILT-IN AIR COMPRESSOR? See page 271.



INSPECTION LAMPS

DUAL RECHARGEABLE LED INSPECTION LAMP

LED IP52 1000LM

NEW

- 10W, 3.7V 4400mAh Li-ion battery
- Strong magnet & hook
- 120° folding design
- 1000 lumens. Spot light 150 lumens
- 3 light outputs: top, 1 side, both sides
- Battery state-of-charge indicator
- Micro USB charging cable & charger
- Protected to IP52, IK08
- UKCA



PART NO.	DESCRIPTION	QTY
0-699-62	Dual LED Inspection lamp	1
0-699-92	UK charger	1

2000 LUMENS HEAVY-DUTY INSPECTION LAMP

LED IP54 2000LM

NEW

- 16W, Li-ion 3.7V 5200mAh battery
- COB LED inspection lamp
- Magnetic base/back, hook, 90° fold & 360° twist bottom
- 2000 lumens, top light 120 lumens
- 3 lighting settings: top, main 50% & 100%
- Battery state-of-charge indicator
- Plug jack UK charger
- Protected to IP54, IK06
- CE, RoHS approved



PART NO.	DESCRIPTION	QTY
0-699-63	Heavy-duty inspection lamp	1

WIRELESS CHARGING INSPECTION LAMPS

LED IP68 500LM

NEW

- 5W, 3.7V 2600mAh Li-ion battery
- Strong magnet base & hook
- 120° folding design
- 500 lumens. Spot light 300 lumens
- Dimming function 55-500 lumens
- Battery state-of-charge indicator
- Wireless charging pad
- Protected to IP68, IK09
- UKCA, CE, RoHS approved

PART NO.	DESCRIPTION	QTY
0-669-40	5W Wireless charging inspection lamp	1
0-669-41	3W Wireless charging inspection lamp	1
0-669-91	UK 3-PIN type C wireless charging pad	1



Wireless charging

CORDLESS FOLDABLE BASE INSPECTION LAMP

LED IP44 300LM

NEW

- 3W, 3.7V 1800mAh Li-ion battery
- Magnet & 108° folding base
- 300 lumens. Top light 20 lumens
- 3 lighting settings: top, main 50% & 100%
- Battery state-of-charge indicator
- Micro USB charging cable
- Protected to IP44
- CE, RoHS approved



PART NO.	DESCRIPTION	QTY
0-699-64	COB LED foldable inspection lamp	1

RECHARGEABLE LED COB INSPECTION LAMP

LED IP54 600LM

- 7W, 3.7V, 2600mAh Li-ion battery
- Main light 600 lumens. Top light 120 lumens
- 5 Battery state indicator LEDs
- Magnetic 360° swivel base & hook
- Battery lasts up to 16.5 hours, up to 4 hours recharge time
- CE, RoHS approved



PART NO.	DESCRIPTION	QTY
0-699-86	LED lamp	1
0-699-95	Euro plug charger	1

WORKSHOP TOOLS & TEST EQUIPMENT WORKSHOP TOOLS INSPECTION LAMPS

RECHARGEABLE COB COLOUR MATCH HAND LAMP



LED

IP65

500LM

- 5W, 3.7V 2600mAh Li-ion battery
- 360° swivel fold-out hook & magnet
- 180° folding design
- 3 colour temp settings - 2700k, 4500K, 6500K
- Battery state-of-charge indicator
- USB charging cable & UK plug
- Protected to IP65, IK07
- CE, RoHS approved
- L 56 x W 35.5 x H 190mm

PART NO.	DESCRIPTION	QTY
0-699-73	COB colour match hand lamp	1

MINI INSPECTION LAMP



LED

IP20

220LM

- 2W Li-ion 3.7V 2200mAh battery
- COB LED inspection lamp with magnet and hook
- 220 lumens
- USB direct charging
- Protected to IP20
- L 48.6 x W 36.7 x H 160mm
- CE Approved

PART NO.	DESCRIPTION	QTY
0-699-74	Mini inspection lamp	1

LED RECHARGEABLE 2 MAGNETS & 2 HOOKS LAMP



LED

IP20

300LM

- 3W, Li-ion 3.7V 1800mAh battery
- COB LED inspection lamp with 2 magnets and 2 hooks on back
- 300 lumens
- 2 light output modes: low or high
- USB cable
- Protected to IP20
- L 280 x W 56 x H 35mm
- CE approved

PART NO.	DESCRIPTION	QTY
0-699-68	Rechargeable inspection lamp	1

LED RECHARGEABLE INSPECTION LAMP WITH TOP LED



LED

IP20

300LM

- 3W Li-ion 3.7V 1800mAh battery
- COB LED inspection lamp with telescopic body, strong magnet and hook
- 300 lumens
- 2 light output modes: low, high
- USB cable
- L 194 x W 43 x H 32mm
- CE approved

PART NO.	DESCRIPTION	QTY
0-699-67	Rechargeable inspection lamp	1

CORDLESS COB FOLDABLE INSPECTION LAMP



LED

IP54

600LM

- 5W, 3.7V 2600mAh Li-ion battery
- Powerful magnet & swivel
- 120° folding design
- 600 lumens. Top light 120 lumens
- 3 lighting settings: top, main 50% & 100%
- Battery state-of-charge indicator
- USB charging cable & UK plug
- Protected to IP54, IK07
- CE, RoHS approved

PART NO.	DESCRIPTION	QTY
0-699-72	COB LED foldable inspection lamp	1

MINI COB HAND LAMP



LED

IP20

200LM

- 2W, 3.7V 700mAh Li-ion battery
- Powerful magnet, 360° swivel base & clip
- 200 lumens. Top light 120 lumens
- 3 lighting settings: top, main 50% & 100%
- Battery state-of-charge indicator
- 1m charging cable
- Protected to IP20, IK07
- CE, RoHS approved
- 17cm

PART NO.	DESCRIPTION	QTY
0-699-71	Mini COB hand lamp	1

WORKSHOP TOOLS & TEST EQUIPMENT WORKSHOP TOOLS INSPECTION LAMPS

LED INSPECTION LAMP WITH ROTATABLE MIRROR

LED

- 2 x 0.5W extendible LED inspection lamp with rotatable mirror
- Mirror helps inspection in hard to reach areas
- 29cm extends up to 89cm
- Supplied with 2 x button cell
- CE approved



PART NO.	DESCRIPTION	QTY
0-222-25	Inspection mirror with LEDs	1

PICK-UP TOOL WITH LED LIGHT

LED

- 1 x 0.5W Telescopic magnetic LED pickup torch
- Strong magnetic head to pick up metal
- Stainless steel
- 18.5cm extends up to 60cm
- Supplied with 3 x button cell
- CE approved



PART NO.	DESCRIPTION	QTY
0-222-30	Magnetic LED pickup torch	1

RECHARGEABLE POCKET INSPECTION LAMP

LED

IP65

700LM

- 7W COB LED lamp with 3.7V 2600mAh Li-ion battery
- Powerful magnet & 360° swivel
- 3 lighting settings; 100, 350 & 700Lm
- 1m USB charging cable
- Protected to IP65, IK07
- L 88.4 x W 31.2 x H 94.8mm
- CE, RoHS approved



PART NO.	DESCRIPTION	QTY
0-699-66	Pocket inspection lamp	1

RECHARGEABLE LED HEAD TORCH

LED

IP54

200LM



3 light modes

- 2W, 3.7V 600mAh Li-ion battery
- COB LED head torch with 10CM smart motion sensor
- Strong belt with non-skid grip
- 200 lumens
- 3 light modes - high, eco and sense
- Full charging time of up to 2.5 hours
- USB cable with 230V UK charger
- Protected to IP54, IK07
- CE, RoHS approved



PART NO.	DESCRIPTION	QTY
0-699-61	2W LED head torch	1

PORTABLE RECHARGEABLE WORK LAMP

LED

IP55

750LM



USB charging

- 10W COB LED
- 750 lumens
- 3 light options - full/half/flash
- Protected to IP55
- USB output charging for mobile device



PART NO.	DESCRIPTION	QTY
0-541-35	Portable work lamp	1

12/24V 5 X 3W LED WORK LAMP

LED

IP67

900LM

- Comes with handle stand, 3 metres of cable and cigarette plug
- Protected to IP67
- 900 lumens
- CE approved
- Lamp: L 109 x W 41 x H 109mm
- Stand: L 200 x W 170 x H 270mm



PART NO.	DESCRIPTION	QTY
0-541-20	Floor standing work lamp	1

WIRING TOOLS

CRIMPING TOOLS


CRIMPING TOOLS

Will also cut or strip six sizes of cable.



For the three sizes of pre-insulated terminals and ignition terminals.

PART NO.	QTY
0-702-00	1

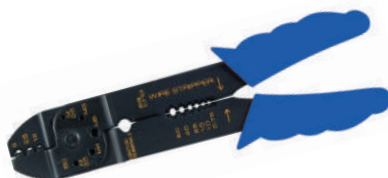

For three sizes of un-insulated terminals and ignition terminals.

PART NO.	QTY
0-703-00	1



For the three sizes of pre-insulated terminals and ignition terminals.

PART NO.	QTY
0-702-10	1

RATCHET CRIMPING TOOLS

- The crimp must be complete before the tool ratchet can be released
- Pressure can be adjusted



PART NO.	DESCRIPTION	QTY
0-702-50	For pre-insulated terminals	1
0-703-54	For heat shrink terminals	1



For medium to large un-insulated terminals.

PART NO.	QTY
0-703-50	1



For 'Econoseal' and 'Superseal' terminals, wire sizes 0.5 to 2.0mm².

PART NO.	QTY
0-703-51	1



For 'Junior PowerTimer' terminals, wire sizes 0.5 to 2.0mm².

PART NO.	QTY
0-703-52	1



For 'JuniorTimer' terminals, wire sizes 0.5 to 2.0mm².

PART NO.	QTY
0-703-53	1



For 4 sizes of un-insulated and tube terminals from 10mm² to 35mm² cable.

PART NO.	QTY
0-703-60	1

WORKSHOP TOOLS & TEST EQUIPMENT WIRING TOOLS CRIMPING TOOLS

HEAVY-DUTY CRIMPING TOOL



Heavy-duty crimping tool, sprung loaded punch, crimping can be achieved in vice or with hammer. Suitable for our copper tube connectors up to cable CSA of 95mm².


PART NO.	QTY
0-703-90	1

CABLE CUTTERS



Large crimping tool for un-insulated and tube terminals. Adjustable crimp for 10mm² to 120mm² cable.

PART NO.	QTY
0-703-80	1



Heavy-duty crimping tool for uninsulated tube terminals. Creates hexagonal crimps for 10, 16, 20, 25, 40, 50, 60, 70 and 95mm² conductors. Tool length 660mm.

PART NO.	QTY
0-703-85	1

CRIMPING TOOLS FOR BRASS NIPPLES

Snip-snap tool for inserting solder or crimp nipples into connectors.



PART NO.	QTY
0-004-00	1

Crimping tool for brass nipples.



PART NO.	QTY
0-004-50	1

DEUTSCH CRIMPING TOOL

Deutsch Crimping Tool for D-sub contacts, AWG12-20.



PART NO.	QTY
0-703-20	1

TERMINAL DEMOUNTING TOOLS

TERMINAL CONNECTOR DE-MOUNTING TOOL




Terminal connector de-mounting tools. Contains individual tools and a handle, supplied in foam storage tray.

FOR EUROPEAN TYPE TERMINALS 26 TOOLS.

PART NO.	QTY
0-706-98	1

TERMINAL EXTRACTION TOOL SET



Terminal extraction tool set.

PART NO.	QTY
0-703-99	1

CABLE CUTTERS AND STRIPPERS

CABLE CUTTERS



Wire side cutters for automotive cables up to 10mm². For soft copper cable only. Spring loaded handles with soft touch insulated grips. 13mm jaw opening, 160mm long.

PART NO. **QTY**

0-704-20 1



Heavy-duty wire side cutters for automotive cables up to 16mm². For soft copper cable only. Spring loaded handles with soft touch insulated grips. 22mm jaw opening, 200mm long.

PART NO. **QTY**

0-704-21 1



Cable cutter for automotive cables up to 100mm². For soft copper cable only.

PART NO. **QTY**

0-704-55 1



Cable cutter for automotive cables up to 70mm². For soft copper cable only.

PART NO. **QTY**

0-704-50 1

CABLE STRIPPERS



Stripping tool for 6 cable sizes up to 5mm². Incorporates cable cutter.

PART NO. **QTY**

0-704-05 1



Stripping tool for cable up to 4mm². Incorporates cable cutter and crimper.

PART NO. **QTY**

0-704-00 1

RAPID WIRE STRIPPER



- Wire cutter for stranded or solid cable maximum size 2mm
- Self adjusting stripper blades
- Made of nylon with hardened steel blades
- Handle lock for easier storage
- Adjustable length stop indicator for 8 -12mm length stripping

PART NO. **QTY**

0-704-15 1



Wire stripper/cutter.

PART NO. **QTY**

0-704-10 1

TEST & MEASURING EQUIPMENT

MULTIMETERS

HAND-HELD DIGITAL MULTIMETER

- Large LCD display for basic functions
- Powered by 2AAA batteries
- CE approved

DC volts.....0 - 500V
 AC volts.....250V/200V
 DC amps.....2mA - 10A
 Resistance Ω200 Ω - 20M Ω
 Temperature $^{\circ}\text{C}$-40 to 1000
 Diode test.....Yes
 Continuity buzzer.....Yes
 Low battery sign.....Yes
 Display.....3½ digit <1999
 Auto 'OFF'.....15 Minutes
 Ranging.....Manual
 LCD size.....15 x 48mm
 Dimensions.....133x77x36mm

PART NO.	DESCRIPTION	QTY
0-798-00	Multimeter	1
0-798-96	Replacement lead set	1



AMMETERS / VOLTMETERS

VOLTMETER / AMMETER TEST SET



- For 6, 12 and 24V systems moving coil meters, voltmeter 0 to 50V ammeter -10 to 100A
- Supplied in a steel with leads and clips

PART NO.	DESCRIPTION	QTY
0-799-50	Voltmeter / ammeter	1
0-799-51	Replacement voltmeter	1
0-799-52	Replacement ammeter	1
0-799-12	Replacement lead set	1

INDUCTION AMMETER 30-0-30 AMPS



- Indicates approximate current and direction of flow when clipped to cables
- 57mm diameter

PART NO.	DESCRIPTION	QTY
0-534-30	Induction ammeter	1
0-534-75	75-0-75A version	1



FOR MORE INFO, VISIT WWW.DURITE.CO.UK
 OR CONTACT INFO@DURITE.CO.UK

ANTIFREEZE HYDROMETERS

INTEGRAL THERMOMETER & DRUM

For ethylene-glycol solutions only. Integral thermometer and drum calculator enables correct % anti-freeze to be determined accurately over a wide temperature range.



Specific gravity range: 0 - 25% A.F

Accuracy tolerance: $\pm 2\%$ A.F

Thermometer range: 0 - 70°C

NOT suitable for methanol or propylene mixtures.

PART NO.	DESCRIPTION	QTY
0-550-00	Hydrometer	1
0-550-02	Bulb	1
0-550-03	Calculator	1
0-550-06	Float	1
0-550-10	Jacket	1
0-550-19	Spout & thermometer	1

POLARMASTER

'Polarmaster', designed for the U.K. Government, takes the accuracy of a laboratory to the vehicle. Ensures accurate determination of % ethylene-glycol at any temperature, and indicates the amount of undiluted anti-freeze to add to obtain the correct degree of frost protection.



Ministry ref. H6/HF 10997.

Specific gravity range: 5 - 60% A.F

Accuracy tolerance: $\pm 2\%$ A.F

Thermometer range: 0 - 70°C

NOT suitable for methanol or propylene mixtures.

PART NO.	DESCRIPTION	QTY
0-711-00	Hydrometer	1
0-711-02	Bulb	1
0-711-06	Float	1
0-711-10	Jacket & thermometer	1
0-711-19	Spout	1

PROPYLENEMASTER

'Propylenemaster', takes the accuracy of a laboratory to the vehicle. Ensures accurate determination of % propylene-glycol at any temperature, and indicates the amount of undiluted anti-freeze to add to obtain the correct degree of frost protection.



Specific gravity range: 5 - 60% A.F

Accuracy tolerance: $\pm 2\%$ A.F

Thermometer range: 0 - 70°C

NOT suitable for methanol or ethylene mixtures.

PART NO.	DESCRIPTION	QTY
0-711-50	Hydrometer	1
0-711-02	Bulb	1
0-711-56	Float	1
0-711-60	Jacket & thermometer	1
0-711-19	Spout	1



TESTERS

CIRCUIT, BRAKE, FUSE & SOCKET TESTERS

'ENERGY PROBE' FOR 6-24VDC SYSTEMS

Multi-functional auto-electrician's circuit testing tool with LCD display.

- Voltmeter
- Tests DC polarity
- Tests circuit continuity
- Energises or powers components
- Indicates HT pulses, peak voltage
- RPM calculation



PART NO.	DESCRIPTION	QTY
0-534-70	Energy probe	1

HAND-HELD CIRCUIT TESTER

- Detects voltages between 6-24V
- The probe gives easy access to circuits and connectors
- Supplied with 24V bulb and a 1.5 metre lead with clip
- AC mains or high voltages will destroy this tester



PART NO.	DESCRIPTION	QTY
0-534-26	Circuit tester	1

FUSE TESTER PULLER

- Tests different size fuses
- LED light helps identify working fuses
- Tweezer end helps pull out faulty fuse



PART NO.	DESCRIPTION	QTY
0-534-29	Fuse tester puller	1

DIAGNOSTICS

MEMORY SAVER TO FIT OBDII PLUG

- 12V memory saver
- Used to avoid the loss of memory during the battery replacement
- Clear LED indicators
- Low power warning when power is low
- Short circuit and polarity protection
- Fits OBDII sockets
- Supplied with crocodile clips and lead for 9V alkaline battery



PART NO.	DESCRIPTION	QTY
0-534-13	Memory saver	1

SOLDERING

SOLDER

WOOD RESIN CORED SOLDER



ISO 12224-1 and ISO 9453, 60% tin, 40% lead.

- 18 SWG (1.25mm), 0.5kg

PART NO.	DESCRIPTION	QTY
0-455-58	18 SWG	1

WOOD RESIN CORED SOLDER



ISO 12224-1 and ISO 9453, 40% tin, 60% lead.

PART NO.	DESCRIPTION	QTY
0-455-18	18 SWG (1.25mm), 0.5kg	1
0-455-00	13 SWG (2.50mm), 0.5kg	1
0-460-00	13 SWG (2.50mm), 2.5kg	1
0-470-00	18 SWG (1.25mm), 1.8m	1

WOOD RESIN CORED LEAD-FREE SOLDER



ISO 12224-1 and ISO 9453.

PART NO.	DESCRIPTION	QTY
0-455-63	13 SWG (2.50mm), 97% tin 3%, copper, 0.5kg	1
0-455-68	20 SWG (1.0mm), 97% tin, 3% copper, 0.5kg	1

WOOD RESIN CORED LEAD-FREE SOLDER



ISO 12224-1 and ISO 9453, 96.5% tin, 3.0% silver 0.5% copper.

- 18 SWG (1.25mm), 0.5kg

PART NO.	DESCRIPTION	QTY
0-470-68	18 SWG	1

BLOWPIPE SOLDER



BS219, grade D, 30% tin, 70% lead

- Approximately 560mm long sticks

PART NO.	DESCRIPTION	QTY
0-469-00	Blowpipe solder	10

TINMANS SOLDER



BS219, grade D, 30% tin, 70% lead

- Approximately 350mm long sticks

PART NO.	DESCRIPTION	QTY
0-468-00	Tinmans solder	5

WORKSHOP TOOLS & TEST EQUIPMENT SOLDERING SOLDER IRONS

SOLDERING ACCESSORIES

"FLUXRITE" SOLDERING PASTE



Contains zinc and ammonium chlorides in petroleum grease - 100g.

PART NO.	DESCRIPTION	QTY
0-613-00	Soldering paste	1

"BAKER'S" NO 3" SOLDERING FLUID



Contains zinc and ammonium chlorides in a water base.

PART NO.	TYPE	QTY
0-620-00	125ml bottle	1
0-664-25	250ml bottle	1

FLUX FOR ALUMINIUM/COPPER



Flux for soldering aluminium or copper, type "Aluflux". 150gm.

PART NO.	DESCRIPTION	QTY
0-620-01	Soldering flux	1

SOLDERING IRONS

Conforms to BS EN60/335 and BS EN60/335-2.45. With moulded thermo-plastic handles designed for comfort and grip. The tips are nickel-plated solid copper and mains leads are made to BS 6500 with a strain relief to protect the lead where it enters the handle.

230V, 25W, TEMPERATURE 400°C



- 230V, 25W
- Temperature 400°C
- 3-LED illumination lamps
- CE approved

PART NO.	TYPE	QTY
0-448-25	Soldering iron	1
0-448-27	Replacement copper tip	1

230V, 40W, TEMPERATURE 482°C



- 230V, 40W
- Temperature 482°C
- 3-LED illumination lamps
- CE approved

PART NO.	TYPE	QTY
0-448-40	Soldering iron	1
0-448-41	Replacement copper tip	1

230V, 80W, TEMPERATURE 482°C



- 230V, 80W
- Temperature 482°C
- 3-LED illumination lamps
- CE approved

PART NO.	DESCRIPTION	QTY
0-448-75	Soldering iron	1

230V, 175W, TEMPERATURE 482°C



- 230V, 175W
- Temperature 482°C
- CE approved

PART NO.	DESCRIPTION	QTY
0-449-75	Soldering iron	1

MAGNASTAT TEMPERATURE CONTROLLED



- 230V, 100W
- Maintains a tip temperature of 370°C
- Conforms to 89/336/EEC & 73/23/EEC
- CE approved

PART NO.	DESCRIPTION	QTY
0-450-10	Soldering iron	1
0-450-11	Replacement copper tip	1



- 230V, 200W
- Maintains a tip temperature of 370°C
- Conforms to 89/336/EEC & 73/23/EEC
- CE approved

PART NO.	DESCRIPTION	QTY
0-450-20	Soldering iron	1
0-450-21	Replacement copper tip	1

WORKSHOP TOOLS & TEST EQUIPMENT SOLDERING SOLDER IRONS

SELF-IGNITING BUTANE 'PYROPEN'



- Temperature controlled by adjusting gas flow
- Heat up time 30 seconds
- Approximately 1 hour operation per charge of gas
- Supplied with hot blow nozzle, for small heat shrink applications, and protective cap

PART NO.	DESCRIPTION	QTY
0-450-70	Soldering iron	1

HEAVY-DUTY SELF-IGNITING BUTANE 'PYROPEN'



- Temperature controlled by adjusting gas flow
- Heat up time 30 seconds
- Approximately 3 hours operation per charge of gas
- Supplied with hot blow nozzle for heat shrink applications, torch ejector for small hard soldering tasks, and protective cap

PART NO.	DESCRIPTION	QTY
0-450-80	Soldering iron	1
0-450-81	Replacement copper tip	1

SOLDERING GUN

INSTANT SOLDERING GUN



- 230V, 100W
- Supplied with cutting and smoothing tips, rosin core solder, soldering aid, 24 page information booklet and carrying case
- Conforms to 73/23/EEC, 93/68/EEC and 89/336/EEC
- CE approved

PART NO.	DESCRIPTION	QTY
0-450-50	Soldering iron	1
0-450-51	Replacement soldering tips	2

BLOW TORCH

BUTANE MICRO BLOW TORCH



Adjustable
flame



Micro Torch with aluminium diamond cut metal handle, piezo auto-ignition, and adjustable hard/soft flames.

- Operating temperature of 900°
- Child-resistant safety lock
- Meet BS, US CPSC and CE Safety Standard and Certification and 26258"
- Compliance with ISO 9994: 2005 lighters safety specification
- L 110 x W 65 x H 150mm

PART NO.	DESCRIPTION	QTY
0-450-90	Micro blow torch	1

BUTANE LIGHTER/BLOW TORCH



- For low temperature soldering on 0-001-90 to 93 terminals and heat shrinking of terminals and heatshrink sleeving
- Refillable from standard butane gas lighter refill can

PART NO.	DESCRIPTION	QTY
0-450-99	Butane torch	1

WORKSHOP POWER

PLUGS AND SOCKETS

16A PLUGS AND SOCKETS, TO BS4343. FOR OUTDOOR USE

PART NO.	DESCRIPTION	QTY
0-684-19	230V blue trailing socket	1
0-698-19	110V yellow trailing socket	1



PART NO.	DESCRIPTION	QTY
0-684-16	230V blue plug	1
0-698-16	110V yellow plug	1



PART NO.	DESCRIPTION	QTY
0-684-69	230V blue surface mounted socket	1
0-698-69	110V yellow surface mounted socket	1



PART NO.	DESCRIPTION	QTY
0-684-66	230V blue surface mounted plug	1
0-698-68	16A 110V yellow panel mounted socket	1



PLUG TOPS WITH SLEEVED PINS & 13A FUSE

Approved to
BS 1363/A and
ASTA/BSI.

See page 184 for main fuses.



PART NO.	DESCRIPTION	QTY
0-684-01	White moulded nylon	20
5-684-01	White moulded nylon	1

PART NO.	DESCRIPTION	QTY
0-698-01	White moulded rubber	20
5-698-01	White moulded rubber	1

PART NO.	DESCRIPTION	QTY
0-698-18	Black moulded rubber	10
5-698-18	Black moulded rubber	1

POWER SUPPLIES

BENCH POWER SUPPLY UNITS

- Designed to produce a stable voltage supply for work shop bench testing
- Input 100-240vac, 50 - 60Hz



PART NO.	DESCRIPTION	QTY
0-649-10	12V 10A	1

POWER PACK CONVERTER

- 230V to 12V DC
- 12V 7A, 84W
- Supplied with 12V DC cigarette plug socket and UK AC plug cord
- Over Voltage/Current/ Temperature Protection



PART NO.	DESCRIPTION	QTY
0-649-07	12V 7A	1

CABLE REELS

RETRACTABLE CABLE REEL



- Fitted with 7 + 1 metres of 2 core 1mm² 10A PVC insulated mains cable
- Incorporates circuit breaker protection
- Extends with a ratchet stop at every 500mm and has spring assisted rewind
- Protected to IP42
- CE approved

PART NO.	DESCRIPTION	QTY
0-718-08	Retractable cable reel	1

25M EXTENSION REEL



- 25 metres of 1.5mm², 15A, 3 core cable
- 16A 230V mains plug
- Two 16A 230V socket outlets to BS4343

PART NO.	DESCRIPTION	QTY
0-684-25	25m	1

25M EXTENSION REEL



- 25 metres of 1.5mm², 15A, 3 core cable
- 16 amp 110V mains plug
- Two 16A 110V socket outlets to BS4343

PART NO.	DESCRIPTION	QTY
0-698-25	25m	1

30M EXTENSION REEL



- 30 metres of 1.25mm², 13A, 3 core cable
- RCD mains plug to BS EN 61242
- 4 socket outlets
- Safety cut-out

PART NO.	DESCRIPTION	QTY
0-723-80	30m	1

11

MERCHANDISING



RETAIL STANDS	296
COUNTER DISPLAY STANDS	297
SIGNS	297

**DURITE MERCHANDISING
IS OF THE HIGHEST
QUALITY AND WILL
IMPROVE CUSTOMER
EXPERIENCE.**



MERCHANDISING

*Products pictured not included.



Raise awareness among customers with Durite Merchandising.

A wide range of tools to choose from;
Stands & display units
Catalogue
Brochures & Flyers
Signs & Posters

Durite merchandising is of the highest quality and will improve customer experience.

STANDALONE STAND



STAND07.

STAND06.

STAND12.

- White standalone merchandising stand with 1 shelf*
- Powder-coated metal

 STANDHOO 6" hooks.

PART NO.	DESCRIPTION	QTY
STAND12	Small stand. H 150 x W 60cm	1
STAND07	Short stand. With 40 hooks. H 170 x W 80cm	1
STAND06	Tall stand. With 50 hooks. H 210 x W 80cm	1

ROTATING STAND



 Contact your rep for pre stocked stand options.

NEW

- Bare stand (no header)
- 4 adjustable tiers*
- Tiers rotate 360°
- 32 hooks
- H 1685 x W 490 x D 490mm

PART NO.	QTY
STAND19	1

WIPER BLADES STAND



Wall mounted

- Holds up to 60 wiper blades
- Strong metal design
- Small & compact
- Wall mounted
- H 440 x W 325 x D 370mm

PART NO.	QTY
STAND18	1

NEW

ASSORTMENT KITS STAND



- Holds 10 assortment kit boxes
- Strong metal design
- Small & compact
- H 470 x W 295 x D 220mm.

PART NO.	QTY
STAND10	1

WALL MOUNTED OR STANDALONE BULB DISPENSER RACK



- High quality 12V or 24V bulb dispenser
- Dispenser includes 118 pieces
- H 320 x W 690 x D 120mm
- Standalone or wall mounted



Standalone or wall mounted

PART NO.	DESCRIPTION	QTY
7-999-12	12V Bulb Dispenser	1
7-999-24	24V Bulb dispenser	1



Contact your local Durite Representative for more information on our range of display stands and leaflets available, or visit www.durite.co.uk

COUNTER STANDS

*Products pictured not included.



- Durite branded card counter stand for Inspection lamps*
- L 424 x W 244.5 x D 390mm

PART NO.	QTY
STAND17	1



- Durite branded card counter stand
- 1ft lightbar & 0-649-07 power pack included
- L 424 x W 244.5 x D 250mm

PART NO.	QTY
STAND16	1



- Durite branded card counter stand for LED work lamps*
- L 300 x W 260 x D 350mm

PART NO.	QTY
STAND11	1



- Durite Counter stand for LED work lamps
- 0-649-07 power pack included
- H 270 x W 490 x D 211mm

PART NO.	DESCRIPTION	QTY
STAND08	Counter stand	1
STAND09	Counter stand with LED Lamps - 0-420-47, 0-420-66, 0-445-16	1



- Durite counter stand for CCTV Kit
- 0-649-07 power pack included

PART NO.	QTY
STAND05	1

SIGNS



PART NO.	DESCRIPTION	QTY
SIGN01	900 x 600mm Durite Aluminium composite wall sign	1
SIGN02	A4 Durite Aluminium composite wall sign	1
SIGN03	A4 Durite Cling plastic window sign	1

WHY CHOOSE DURITE

THE QUALITY BRAND FOR PROFESSIONALS



Our goal is to provide simple, yet effective solutions to our customers.

SUPPORT



Durite offers bespoke solutions, end-to-end support from kit specification to installation and aftersales care.

Our dedicated and qualified Technical Services team is always on hand and able to advise on all technical issues.

APPLICATIONS



Our extensive product line covers both 12V and 24V applications, and meets requirements for LCV to HGV, trailers, small to large commercial fleet, public utility fleets, marine, agricultural and construction vehicles.

AVAILABILITY



Durite has an exceptional stock availability on over 5,000 products and next day delivery for all orders placed before 5:00pm.

We will always have the perfect solution for you, your fleet, and your business.

INNOVATION & COMPLIANCE



With regulations always evolving, Durite helps you stay compliant.

We continuously develop our products to bring you the latest technology, whilst maintaining legislation & best practice benchmarks.

QUALITY



Durite has an outstanding reputation for product quality. From our accreditations to our team members who sample and check quality before dispatch – the maintenance and improvement of quality standards is in our culture.

You can rely on our affordable quality, which is central to our reputation.

Durite is a FORS Associate Supplier, SMMT, Logistics UK, CEA, and a AVI member with an ISO 9001:2015 certification.

"THE TRUSTED QUALITY BRAND FOR PROFESSIONALS"



LOGISTICS UK



Contact your local Durite representative for more information. Or visit www.durite.co.uk.

12

INDEX ALPHABETICAL & NUMERICAL

ALPHABETICAL INDEX

A

Adhesive tapes.....	171
Aerials	239
Aftermarket blade fuses.....	181
Aftermarket range of relays.....	249
Air compressors.....	280
Air horns	237
Air switches	106
Alternator connector	258
Amber lens LED light bars	53
Ammeters / voltmeters	287
Angled scene lights	72
Anti-corrosive compound.....	145
Anti-freeze hydrometers	288
Arc forklift lamp	71
Arrow LED forklift lamp	71
Assorted connector boxes.....	194
Assorted copper tube boxes	196
Assorted fuse kits	195
Assorted grommets.....	194
Assorted heatshrink boxes.....	195
Assorted pre-insulated terminals....	193
Assortment boxes.....	193-196
Assortment kits stand.....	196, 296
Auxiliary driving lamp.....	69

B

Back up alarms	25-27
Battery chargers	272, 273

Battery Chargers & Maintenance. See pages 269-278.

Battery fillers & pumps	277
Battery hydrometers	275
Battery Isolators.....	102
Battery leads	176
Battery maintenance equipment	276

Battery maintenance accessories.....	277
Battery terminal accessories.....	145
Battery terminal covers.....	145
Battery terminals	142-145
Battery testers.....	274
Beacons.....	56-59
Bench battery chargers.....	272, 273
Blade connectors	161
Blade fuse holders	188, 193-196
Blade terminals	152
Blade type fuse box	191
Blind spot systems.....	22, 23
Blow torch.....	292
Booster cables.....	175
Booster packs	270, 271
Box, clamps & carriers	276
Brackets.....	39, 71
Brake light camera	34
Brake light camera kit.....	17
Brass body connector	141
Bulb beacons.....	59
Bulb holders	92, 100
Bulb light bars	55
Bulbs.....	92-99
Bulbs - professional 12V.....	92
Bulbs - professional 24V	93
Bulb holders	100
Bulb work lamps	70
Bus bar	163
Butt splice connectors.....	141
Buzzers	27

C

Cable clips.....	170
Cable cutters and strippers	286
Cable management.....	165-173
Cable reels	294
Cables.....	128-137
Cable sleeving	167, 168, 171
Cable sockets.....	142
Cable ties and accessories.....	170, 171

Cable & Wiring Accessories. See pages 127-196.

Calibration mats.....	24
Camera systems - 360° 3D.....	24
Camera systems - 5"	16
Camera systems - 7"	14
Camera systems - 9"	16
Cameras.....	32
Canbus connector module.....	23
CCTV accessories	39-42
CCTV adaptors	41
CCTV cable	40

CCTV Kits & Vehicle Safety. See pages 7-44.

CCTV monitoring kits	14
CCTV wireless aerials.....	42
Change-over	104
Change-over relays.....	247
Charging clips.....	174
Circuit, brake, fuse & socket testers	289
Circuit breakers	186, 187
Circuit protection	179-196
CLOCS	12
Combined warning lights.....	49
Commercial LED rear lamp.....	77-79
Commercial LED lamp - 95mm.....	84
Commercial LED lamp - 140mm.....	85
Commercial wiper blades.....	230
Compact modified wave inverters... ..	198
Compact sine wave inverter	200
Compliant kits	12, 13
Connector accessories.....	140
Connectors & terminals	140-162
Continental box.....	192
Convuluted tubing	164
Convuluted tubing accessories	165-167
Copper braids.....	178
Crimping tools.....	284
Crimp ring terminals.....	155

ALPHABETICAL INDEX

D

Dashboard accessories	226
Dashboard gauges	225
Dashboard switches	108
Dash cameras	19
Delphi connectors	158
Deutsch DT series connectors	160
Diagnostics	289
Diodes	185
Direct Vision Standard	12, 29
Discharge testers	274
Dome cameras	32
Door and foot switches	123
Double insulated battery cable	137
Double pole switches	103, 117, 119
Driving lamps	68, 69
Durite Live DVR kits	10
DVR accessories	41
DVR kits	8, 10, 11
DVRs	30
DVS	12, 29

E

Earth straps	177, 178
Econoseal connectors	157
Electric horns	236
Electronic split chargers	211
Electronic testers	274
Emergency isolators	105

Equipment & Accessories.
See pages 209-240.

External switches	102
Extra heavy-duty make & break	251

F

Fans	238
Female spade terminal heatshrink ..	148
Flasher units	251
Flashing beacons	59
Flat twin core PVC auto cable	132
Flexible mains cable	138
Flexible starter cable BS6862	136
Forklift work lamps	71
FORS	12
Forward facing cameras	32
Front combo lamp - 2-function	84
Fuse holders	188-193
Fuses	179-185
Fuses boxes	191, 192

G

Gauge accessories	226
Gauges	222
Glass fuses	184
Glow plug controllers	263
Glow plugs	259
Glow plugs specs	262
Grommets	169

H

Handle work lamps	66
Harness accessories & tape	171-173
HD hard drive DVR kits	8
Headlamp & auxilliary bulbs	92
Headlamps	90
Heater plugs specs	262
Heavy-duty battery chargers	273
Heavy-duty cables	136, 137
Heavy-duty LED work lamps	65
Heavy-duty MW inverters	199
Heavy-duty PSW inverters	201
Heavy-duty work lamps	65
High current connectors	140, 141
Horns	236

I

Ignition cables	138
Ignition switches	106
Ignition terminals	156
Individual vehicle lights	84, 85
Industrial gauges	223
In-line fuse holders	190
Inspection lamps	281-283
Integrated CCTV & DVR kits	11
Interior/exterior lights	72-76
Intermittent back up alarm	25
IR Jack	30

J

Jcase type fuses	183
Junction boxes	163
Junior power terminals	157
Junior power timer connectors	157
Junior timer connectors	157

L

LED bar work lamps	67
LED beacons	56-58
LED driving lamps	68, 69
LED fuse box and busbar	192
LED light bars	52-55
LED marker lamps	87, 88
LED modular rocker switches	108
LED rectangular work lamps	67
LED reversing lamps	70
LED warning lights	46-51
LED work lamps	60-70
LED work lamps with ADR approval ..	64
LED work lamps with amber warning ..	64
Left turn speaker	26, 27
Light bars	52

Lighting.
See pages 45-100

Linear interior lamps	75
Linear interior lights	72-76
Line LED forklift lamp	71
Li-polymer booster packs	270

Low speed trigger module	23
Lucas replica	192

M

Magnetic camera	39
Magnetic base work lamps	66
Mains type fuses	184
Make & break relays	243
Male spade terminals heatshrink	147
Manufacturer cross reference	261
Map light	76
Marine	104
Marine gagues	224
Marker lamps	86
Marker lamps with ADR approval	86
Mate n lock connectors	162
Mcase+ type fuses	184
Mechanical regulators	258
Mega fuse holder	189
Mega type fuses	181, 182

Merchandising.
See pages 295-298.

Metal ignition switches	106
Metric battery terminals	143
Micro change-over	249
Micro make & break	249
Micro make & break relays	243
Midi fuse holder	189
Mini change-over	250
Mini change-over relays	247
Mini heavy-duty make & break	250
Mini make & break	249
Mini make & break relays	244
Mirror monitor CCTV kit	17
Mirrors	28
Modified wave inverters	198
Modified wave inverters specs	202, 203
Modular rocker switches	110
7" 2-channel monitor	35
7" 3-channel monitor	36
7" 4-channel monitor	36
9" monitor	37
5" monitors	36
7" monitors	35
Monitors	35
Mounting blocks	187
Multicore cables - 3 core	133
Multicore cables - 4 core	133, 134
Multicore cables - 5 core	134
Multicore cables - 7 core	134
Multicore cables - 8 core	135
Multicore cables - 13 core	135
Multi-frequency back up alarms	25
Multi-function alarm	27
Multimeters	287
Multiple connectors	157-162

N

Near side blind spot sensor kits	23
Number plate camera	34
Number plate CCTV Kit	17
Number plate lamps	89

ALPHABETICAL INDEX

O

Oil & fuel pumps	240
Other battery terminals	144
Other rocker switches	113
Other warning lights	114
Outline marker lamps	88
Oval roof lamps	74, 75
Oval work lamps	63

P

Packard timer connectors	159
Pal type fuses	182
Panel mounted fuse holders	190
PE/PVC connectors	162
PIR sensor interior lamp	76
Plastic ignition switches	107
Plugs and sockets	214–216, 293
Plugs and sockets accessories	216
Pole connectors	140
Power cables	139, 140

Power Conversion.
See pages 197-208.

Power inverters	198
Power plugs	214
Power sockets	215, 216
Power supplies	293
Power tools	280
Power transfer	174–178
Pre-insulated terminals	146–151
Pre-made push button controls	124
Programmable timer relays	242
Push button controls	124
Push button switches	121
Push/pull switches	122

R

R10 warning lights	46
R65 rotating beacons	59
R65 rotating light bars	55
R65 warning lights	47
Rear blind spot sensor kit	23
Rear cameras	34
Rear combination lamps	77-84
Rear combo lamps - 3-function	83, 84
Rear combo lamps - 4-function	81–83
Rear combo lamps - 5-function	80, 81
Rear combo lamps - 6/7-function	78–80
Rear combo lamps - 8-function	77
Rear combo lamps - 95mm	83
Rear combo lamps - 140mm	83
Receptacles heat-shrink	150
Rectangular roof lamps	74
Reflectors	91
Reflex reflector	91
Regulators	258
Relay boxes	254
Relays	242

Relays & Flasher Units.
See pages 241-254.

Remote battery switches	105
-------------------------------	-----

Replacement Components.
See pages 255-268.

Retractable cable	227–229
Reversing speaker	26
Reversing & warning speakers	26
Right turn speakers	26
Rocker switches & warning lights	108
Roof lamp	73
Rotary switches	120
Round roof lamps	73, 74
Round terminals	152
Round twin core PVC auto cable	133

S

Schlemmer connectors	159
Scotchlok connectors	156
Siamese battery cable	139
Side cameras	33
Side scan kits	22, 23
Signs	297
Sine wave inverters	200
Sine wave inverters specs	204, 205
Single core auto cables	128–131
Single core PVC auto cable	130, 131
Single function vehicle lights	84
Single pole, plain on/off switches	115
Single pole switches	102, 116
Smart touch screen monitor	37
Sockets	254
Solder	290
Soldering	290
Soldering accessories	291
Soldering gun	292
Soldering irons	291
Solder terminals	154
Solenoids	256
Speaker cable	138, 139
Speakers	239
Special cables	138
Specialist camera system	16
Split charge relays	211
Splitter & switcher	42
Sports gauges	222
Spot on bars	278
Standalone stand	296
Starter cable BS6862	137
Starter solenoids	256
Stop/advance solenoids	257
Strengthening collars	166
Superseal connectors & terminals	158
Suzi cable	40

Switches & Indicators.
See pages 101-126.

T

Tail lamps	85
Tamper seals	20, 36

Telematics	21
Terminal boxes	163
Terminal demounting tools	285
Terminals	142–156
Testers	289
Test & measuring equipment	287
Thin wall single core cables	128, 129
Three positions switches	117
Timer relays	243
Toggle switches	115
Tonal back up alarms	26
Tools	124
Trailer light	79, 80
Trailer plug accessories	221
Trailer plugs	217
Trolleys	273
Twin core cables	132, 133

U

Uninsulated terminals	154–156
Universal LED rear lamp	78–81, 83
Universal plugs and sockets	220
Universal solenoids	256
Universal work lamp	63

V

Van camera systems	17
Van monitors	37
Vehicle applications	259, 265
Vinyl safety signs	43
Voltage converters	206
Voltage converters specs	208
Voltage sensitive relays	210

W

Warning flares	51
Warning lights	46–51
Warning signs	43
Warning speakers	26
Washer pumps	233
Wireless monitors	38
Windscreen washer bottles	234
Windscreen washer components	235
Windscreen wiper motors	231
Wing mirror arm camera	33
Wiper arms	232
Wiper blades	230
Wiper equipment	231
Wireless cameras	38, 39
Wireless camera systems	18
Wiring tools	284
Work lamp brackets	71
Work lamps	60–71
Workshop power	293

Workshop & Test Equipment.
See pages 279-294.

NUMERICAL INDEX

0-001-01.....	146	0-002-13.....	170	0-004-71.....	152	0-008-53.....	142	0-011-54.....	158
0-001-02.....	146	0-002-14.....	170	0-004-72.....	152	0-008-54.....	142	0-011-55.....	158
0-001-03.....	147	0-002-15.....	170	0-004-74.....	152	0-008-55.....	142	0-011-56.....	158
0-001-04.....	147	0-002-18.....	170	0-004-75.....	170	0-008-60.....	141	0-011-60.....	158
0-001-05.....	146	0-002-20.....	170	0-004-76.....	170	0-008-62.....	142	0-011-61.....	158
0-001-06.....	146	0-002-21.....	170	0-004-77.....	170	0-008-63.....	142	0-011-62.....	158
0-001-07.....	147	0-002-28.....	170	0-004-79.....	170	0-008-64.....	142	0-011-63.....	158
0-001-08.....	147	0-002-29.....	170	0-004-80.....	170	0-008-65.....	142	0-011-64.....	158
0-001-09.....	148	0-002-30.....	170	0-004-81.....	171	0-008-66.....	142	0-011-65.....	158
0-001-10.....	151	0-002-31.....	170	0-004-82.....	171	0-008-70.....	141	0-011-66.....	158
0-001-11.....	151	0-002-32.....	170	0-004-83.....	171	0-008-73.....	142	0-011-69.....	194
0-001-12.....	146	0-002-33.....	170	0-005-10.....	152	0-008-74.....	142	0-011-71.....	158
0-001-13.....	147	0-002-34.....	170	0-005-11.....	152	0-008-75.....	142	0-011-72.....	158
0-001-14.....	149	0-002-35.....	170	0-005-12.....	153	0-008-76.....	142	0-011-73.....	158
0-001-15.....	149	0-002-37.....	170	0-005-13.....	154	0-008-77.....	142	0-011-81.....	158
0-001-16.....	151	0-002-38.....	170	0-005-14.....	152	0-008-80.....	141	0-011-82.....	158
0-001-17.....	148	0-002-40.....	170	0-005-15.....	152	0-008-84.....	142	0-011-83.....	158
0-001-18.....	148	0-002-41.....	170	0-005-16.....	152	0-008-85.....	142	0-011-95.....	160
0-001-19.....	148	0-002-42.....	170	0-005-18.....	152	0-008-86.....	142	0-011-96.....	160
0-001-20.....	146	0-002-44.....	170	0-005-19.....	154	0-008-87.....	142	0-011-97.....	160
0-001-21.....	146	0-002-45.....	170	0-005-20.....	153	0-009-03.....	156	0-011-98.....	160
0-001-22.....	146	0-002-46.....	170	0-005-21.....	154	0-009-10.....	156	0-012-02.....	141
0-001-23.....	146	0-002-47.....	170	0-005-22.....	154	0-009-11.....	156	0-012-25.....	157
0-001-25.....	146	0-002-48.....	170	0-005-23.....	154	0-010-41.....	154	0-012-26.....	157
0-001-26.....	147	0-002-49.....	170	0-005-24.....	154	0-010-47.....	154	0-012-27.....	157
0-001-27.....	148	0-002-50.....	170	0-005-26.....	154	0-010-51.....	154	0-012-28.....	157
0-001-28.....	147	0-002-51.....	170	0-005-27.....	153	0-010-54.....	155	0-012-42.....	157
0-001-29.....	148	0-002-52.....	170	0-005-28.....	153	0-010-55.....	155	0-012-43.....	157
0-001-30.....	148	0-002-53.....	170	0-005-29.....	153	0-010-61.....	155	0-012-52.....	157
0-001-31.....	150	0-002-54.....	170	0-005-30.....	153	0-010-62.....	155	0-012-53.....	157
0-001-32.....	149	0-002-55.....	170	0-005-31.....	154	0-010-63.....	155	0-012-61.....	157
0-001-33.....	149	0-002-56.....	170	0-005-32.....	153	0-010-64.....	155	0-012-62.....	157
0-001-34.....	148	0-002-57.....	170	0-005-34.....	153	0-010-65.....	155	0-012-71.....	157
0-001-35.....	150	0-002-58.....	170	0-005-35.....	153	0-010-66.....	155	0-012-72.....	157
0-001-36.....	149	0-002-59.....	170	0-005-38.....	163	0-010-67.....	155	0-012-73.....	157
0-001-37.....	149	0-002-62.....	155	0-005-39.....	151	0-010-68.....	155	0-012-74.....	157
0-001-38.....	150	0-002-63.....	171	0-005-40.....	151	0-010-69.....	155	0-012-92.....	159
0-001-39.....	146	0-002-64.....	171	0-005-41.....	151	0-011-00.....	194	0-012-93.....	159
0-001-40.....	148	0-002-65.....	170	0-005-48.....	152	0-011-01.....	161	0-013-00.....	194
0-001-41.....	148	0-002-66.....	171	0-005-52.....	163	0-011-02.....	161	0-013-01.....	162
0-001-42.....	150	0-002-67.....	171	0-005-53.....	163	0-011-03.....	161	0-013-02.....	162
0-001-43.....	150	0-002-68.....	170	0-005-57.....	163	0-011-04.....	161	0-013-03.....	162
0-001-44.....	150	0-002-69.....	170	0-005-58.....	163	0-011-05.....	161	0-013-04.....	162
0-001-45.....	146	0-002-71.....	171	0-005-59.....	163	0-011-06.....	161	0-013-05.....	162
0-001-46.....	148	0-002-72.....	171	0-005-60.....	163	0-011-07.....	161	0-013-06.....	162
0-001-47.....	148	0-002-73.....	171	0-005-61.....	156	0-011-08.....	161	0-013-07.....	162
0-001-48.....	146	0-002-74.....	171	0-005-70.....	163	0-011-10.....	161	0-013-11.....	162
0-001-49.....	151	0-002-75.....	171	0-005-71.....	163	0-011-12.....	161	0-013-12.....	162
0-001-50.....	151	0-002-81.....	171	0-005-75.....	163	0-011-13.....	161	0-013-13.....	162
0-001-51.....	151	0-002-82.....	171	0-005-76.....	163	0-011-14.....	161	0-013-14.....	162
0-001-52.....	148	0-002-83.....	171	0-005-96.....	163	0-011-15.....	161	0-013-15.....	162
0-001-53.....	150	0-002-84.....	171	0-005-97.....	163	0-011-16.....	161	0-013-16.....	162
0-001-54.....	150	0-002-85.....	171	0-006-03.....	156	0-011-17.....	161	0-013-17.....	162
0-001-55.....	150	0-002-86.....	171	0-006-10.....	156	0-011-18.....	161	0-013-21.....	162
0-001-56.....	149	0-002-87.....	171	0-006-13.....	156	0-011-21.....	153, 161	0-013-23.....	162
0-001-57.....	149	0-002-88.....	171	0-008-10.....	196	0-011-22.....	153, 161	0-014-01.....	141
0-001-58.....	149	0-002-91.....	171	0-008-15.....	196	0-011-23.....	153, 161	0-014-05.....	141
0-001-59.....	148	0-002-92.....	171	0-008-20.....	141	0-011-24.....	153, 161	0-014-51.....	141
0-001-60.....	148	0-002-93.....	171	0-008-21.....	142	0-011-30.....	194	0-014-55.....	141
0-001-61.....	148	0-002-94.....	171	0-008-22.....	142	0-011-32.....	160	0-022-00.....	145
0-001-62.....	147	0-002-95.....	171	0-008-23.....	142	0-011-33.....	160	0-023-00.....	144
0-001-63.....	147	0-003-40.....	155	0-008-24.....	142	0-011-34.....	160	0-059-00.....	275
0-001-64.....	147	0-003-50.....	155	0-008-25.....	142	0-011-36.....	160	0-059-02.....	275
0-001-65.....	146	0-003-52.....	155	0-008-30.....	141	0-011-38.....	160	0-059-06.....	275
0-001-66.....	146	0-003-57.....	155	0-008-32.....	142	0-011-39.....	160	0-059-10.....	275
0-001-67.....	146	0-003-59.....	171	0-008-33.....	142	0-011-42.....	160	0-059-19.....	275
0-001-71.....	146	0-003-60.....	155	0-008-34.....	142	0-011-43.....	160	0-060-00.....	275
0-001-72.....	146	0-003-61.....	155	0-008-35.....	142	0-011-44.....	160	0-060-02.....	275
0-001-73.....	146	0-003-70.....	155	0-008-40.....	141	0-011-46.....	160	0-060-06.....	275
0-001-90.....	151	0-003-75.....	155	0-008-42.....	142	0-011-48.....	160	0-060-10.....	275
0-001-91.....	151	0-003-80.....	155	0-008-43.....	142	0-011-49.....	160	0-060-19.....	275
0-001-92.....	151	0-003-85.....	155	0-008-44.....	142	0-011-50.....	158	0-063-02.....	85
0-001-93.....	151	0-004-00.....	285	0-008-45.....	142	0-011-51.....	158	0-069-50.....	77
0-002-09.....	170	0-004-50.....	285	0-008-50.....	141	0-011-52.....	158	0-069-51.....	77
0-002-12.....	170	0-004-70.....	151	0-008-52.....	142	0-011-53.....	158	0-070-00.....	275

NUMERICAL INDEX

0-070-02	275	0-79X-38.....	109, 112	0-130-52	259-262	0-171-98	86	0-234-56	192
0-070-06	275	0-79X-39.....	109, 112	0-130-65	259-262	0-172-20	88	0-234-60	191
0-070-10	275	0-79X-40.....	112	0-130-75	259-262	0-172-25	88	0-234-66	191
0-070-19	275	0-79X-41.....	109, 112	0-130-81	259, 261, 262	0-172-30	88	0-234-76	192
0-071-00	78	0-79X-42.....	112	0-130-85	259-262	0-172-31	88	0-234-82	192
0-071-01	78	0-79X-43.....	109, 112	0-131-02	259, 261, 262	0-172-35	88	0-235-01	195
0-071-02	78	0-79X-44.....	109, 112	0-131-50	259, 261, 262	0-172-36	88	0-235-02	195
0-071-10	78	0-79X-45.....	109, 112	0-131-53	260-262	0-172-40	88	0-235-03	196
0-071-20	79	0-79X-46.....	112	0-131-54	259-262	0-172-41	88	0-235-04	195
0-071-21	79	0-79X-47.....	109, 112	0-131-57	259, 261, 262	0-172-45	88	0-235-05	195
0-071-40	79	0-79X-48.....	109, 112	0-132-02	260	0-172-46	88	0-237-01	192
0-071-41	79	0-79X-49.....	109, 112	0-133-01	263, 265, 266	0-172-71	88	0-237-06	192
0-071-55	80	0-79X-50.....	109, 112	0-133-02	263, 265, 266	0-172-80	88	0-241-01	119
0-071-60	78	0-79X-51.....	109, 112	0-133-04	264-267	0-172-81	88	0-242-01	119
0-071-61	78	0-79X-52.....	109, 112	0-133-05	264	0-172-85	88	0-243-01	226
0-071-64	78	0-79X-53.....	109, 112	0-133-08	264-266	0-172-86	88	0-243-02	226
0-071-65	78	0-79X-54.....	109, 112	0-133-14	264-267	0-186-00	174	0-243-03	226
0-071-96	78	0-79X-55.....	109, 112	0-133-29	263, 265, 266	0-187-00	174	0-243-04	226
0-071-97	79	0-79X-56.....	109, 112	0-139-99	145	0-187-01	174	0-261-00	174
0-071-98	78	0-79X-57.....	109, 112	0-140-01	174	0-187-05	174	0-263-00	174
0-071-99	78	0-79X-92.....	109, 112	0-140-05	174	0-187-25	174	0-263-27	174
0-074-00	77	0-79X-94.....	109, 112	0-149-00	277	0-187-27	174	0-263-50	174
0-074-01	77	0-79X-95.....	109, 112	0-149-50	277	0-187-50	174	0-288-00	178
0-074-98	77	0-79X-97.....	109	0-153-00	174	0-189-00	178	0-289-00	221
0-074-99	77	0-080-00	77	0-153-01	174	0-190-00	178	0-289-01	221
0-076-00	83	0-080-01	77	0-153-05	174	0-203-01	193	0-289-53	221
0-076-01	83	0-080-98	77	0-153-50	174	0-203-02	193	0-294-30	85
0-076-98	83	0-080-99	77	0-153-51	174	0-203-03	193	0-294-31	85
0-076-99	83	0-081-02	79	0-153-55	174	0-203-04	193	0-294-32	85
0-077-02	79	0-081-03	79	0-154-00	175	0-203-05	193	0-294-33	85
0-077-03	79	0-081-98	79	0-167-00	87	0-203-06	193	0-294-60	80
0-077-20	79	0-081-99	79	0-167-05	87	0-203-07	193	0-294-61	80
0-077-21	79	0-085-50	78	0-167-10	87	0-204-00	175	0-294-75	84
0-077-22	79	0-086-50	78	0-167-55	87	0-204-10	175	0-294-80	81
0-077-95	79	0-087-40	276	0-167-60	87	0-204-20	175	0-295-00	82
0-077-96	79	0-087-45	276	0-168-50	87	0-205-00	175	0-295-50	82
0-077-98	79	0-087-55	276	0-168-55	87	0-205-10	175	0-295-65	81
0-077-99	79	0-087-75	276	0-168-60	87	0-205-11	175	0-295-66	81
0-79X-01	109, 112	0-097-30	83	0-169-00	86	0-205-20	175	0-295-99	82
0-79X-02	109, 112	0-097-50	83	0-169-05	86	0-210-32	238	0-296-12	240
0-79X-03	109, 112	0-097-51	85	0-169-10	86	0-210-44	238	0-300-00	83
0-79X-04	109, 112	0-097-52	85	0-169-50	88	0-210-62	238	0-300-10	82
0-79X-05	109, 112	0-097-53	85	0-169-55	88	0-210-74	238	0-300-14	82
0-79X-06	109, 112	0-097-54	85	0-169-60	88	0-210-82	238	0-300-15	82
0-79X-07	112	0-097-55	81	0-169-96	86	0-210-94	238	0-300-20	80
0-79X-08	109, 112	0-097-62	77	0-169-97	86	0-222-25	283	0-300-25	82
0-79X-09	109, 112	0-097-68	85	0-169-98	87, 88	0-222-30	283	0-300-30	82
0-79X-10	109, 112	0-097-74	77	0-169-99	87, 88	0-226-00	276	0-300-50	83
0-79X-11	109, 112	0-097-78	85	0-170-00	87	0-229-00	91	0-300-60	80
0-79X-12	109, 112	0-099-11	35	0-170-04	87	0-230-05	184	0-300-61	80
0-79X-13	109, 112	0-099-15	34	0-170-05	87	0-230-08	184	0-300-75	82
0-79X-14	109, 112	0-099-16	35	0-170-10	87	0-230-16	184	0-300-97	83
0-79X-15	109, 112	0-099-40	17	0-170-25	87	0-230-25	184	0-311-00	84
0-79X-16	109, 112	0-099-45	17	0-170-30	87	0-230-55	184	0-311-99	84
0-79X-17	109, 112	0-129-01	257	0-170-45	50	0-230-58	184	0-314-00	277
0-79X-18	109, 112	0-129-02	257	0-170-58	87	0-230-66	184	0-314-50	277
0-79X-19	112	0-129-03	257	0-170-60	86	0-230-75	184	0-315-03	239
0-79X-20	109, 112	0-129-04	257	0-170-65	86	0-232-12	177	0-315-53	239
0-79X-21	109, 112	0-129-05	258	0-170-70	86	0-232-15	177	0-325-07	168
0-79X-22	109, 112	0-129-06	257	0-170-80	86	0-232-18	177	0-325-10	168
0-79X-23	109, 112	0-129-08	257	0-170-85	86	0-232-24	177	0-325-13	168
0-79X-24	109, 112	0-129-11	258	0-170-90	86	0-234-00	192	0-325-19	168
0-79X-25	109, 112	0-129-12	240	0-170-98	86	0-234-14	191	0-325-32	168
0-79X-26	109, 112	0-129-21	258	0-170-99	86	0-234-16	191	0-325-38	168
0-79X-27	112	0-129-24	240	0-171-00	86	0-234-18	191	0-326-01	167
0-79X-28	112	0-129-26	257	0-171-05	86	0-234-24	191	0-326-02	167
0-79X-29	112	0-129-27	257	0-171-10	86	0-234-26	191	0-326-03	167
0-79X-30	112	0-129-28	257	0-171-11	86	0-234-28	191	0-326-04	167
0-79X-31	112	0-129-32	257	0-171-50	86	0-234-30	191	0-326-05	167
0-79X-32	112	0-129-62	240	0-171-55	86	0-234-34	191	0-326-06	167
0-79X-33	112	0-130-01	259, 260	0-171-60	86	0-234-36	191	0-326-07	167
0-79X-34	109, 112	0-130-12	259-262	0-171-61	86	0-234-40	191	0-326-11	166
0-79X-35	112	0-130-21	259-262	0-171-70	86	0-234-44	191	0-326-12	166
0-79X-36	112	0-130-26	259-262	0-171-75	86	0-234-46	191	0-326-13	166
0-79X-37	109, 112	0-130-46	260	0-171-80	86	0-234-50	192	0-326-14	166

NUMERICAL INDEX

0-326-15.....	166	0-329-04.....	168, 195	0-333-62.....	167	0-365-16.....	217	0-373-55.....	185
0-326-16.....	166	0-329-06.....	168, 195	0-333-69.....	167	0-365-19.....	217	0-373-58.....	185
0-326-17.....	166	0-329-09.....	168, 195	0-333-75.....	167	0-365-20.....	181	0-373-65.....	185
0-326-30.....	166	0-329-12.....	168, 195	0-333-88.....	167	0-365-25.....	181	0-373-70.....	185
0-326-31.....	166	0-329-19.....	168, 195	0-334-63.....	168	0-365-30.....	181	0-374-01.....	184
0-326-32.....	166	0-330-07.....	164	0-334-75.....	168	0-365-40.....	181	0-374-02.....	184
0-326-33.....	166	0-330-10.....	164	0-335-00.....	256	0-366-10.....	182	0-374-03.....	184
0-326-34.....	166	0-330-13.....	164	0-335-01.....	256	0-366-12.....	182	0-374-04.....	184
0-326-35.....	166	0-330-17.....	164	0-335-02.....	256	0-366-15.....	182	0-374-05.....	184
0-326-40.....	167	0-330-22.....	164	0-335-04.....	257	0-366-17.....	182	0-374-07.....	184
0-326-41.....	167	0-330-38.....	164	0-335-05.....	257	0-366-20.....	182	0-374-10.....	184, 195
0-326-42.....	167	0-330-42.....	164	0-335-06.....	256	0-366-22.....	182	0-374-15.....	184, 195
0-326-43.....	167	0-330-46.....	164	0-335-07.....	256	0-366-25.....	182	0-374-25.....	184, 195
0-326-44.....	167	0-330-51.....	164	0-335-08.....	257	0-366-55.....	182	0-374-30.....	184
0-326-51.....	159	0-330-55.....	164	0-335-38.....	256	0-368-13.....	181	0-374-35.....	184, 195
0-326-52.....	159	0-330-57.....	166	0-335-39.....	256	0-368-14.....	181	0-374-40.....	184
0-326-53.....	159	0-330-58.....	164	0-335-46.....	256	0-368-15.....	181	0-374-50.....	184, 195
0-326-54.....	159	0-330-60.....	166	0-335-47.....	256	0-368-16.....	181	0-374-85.....	184
0-326-55.....	159	0-330-67.....	166	0-335-50.....	256	0-368-17.....	181	0-375-01.....	179
0-326-56.....	159	0-330-72.....	166	0-335-56.....	256	0-368-18.....	181	0-375-02.....	179
0-326-57.....	159	0-330-77.....	166	0-335-57.....	256	0-368-20.....	181	0-375-03.....	179
0-326-58.....	159	0-330-80.....	166	0-335-58.....	256	0-368-22.....	181	0-375-04.....	179
0-326-90.....	167	0-330-83.....	166	0-335-59.....	256	0-371-02.....	179	0-375-05.....	179
0-326-91.....	167	0-330-87.....	166	0-349-00.....	118	0-371-05.....	179	0-375-07.....	179
0-326-92.....	167	0-330-92.....	166	0-349-01.....	117	0-371-07.....	179	0-375-10.....	179
0-326-93.....	167	0-331-07.....	164	0-349-02.....	119	0-371-10.....	179	0-375-15.....	179, 195
0-327-01.....	166	0-331-10.....	164	0-349-11.....	118	0-371-15.....	179	0-375-20.....	179, 195
0-327-02.....	166	0-331-13.....	164	0-349-40.....	117	0-371-20.....	179	0-375-25.....	179
0-327-03.....	166	0-331-17.....	164	0-351-01.....	106	0-371-25.....	179	0-375-30.....	179, 195
0-327-04.....	166	0-331-22.....	164	0-351-03.....	107	0-371-30.....	179	0-375-35.....	179
0-327-10.....	165	0-331-26.....	164	0-351-04.....	106	0-371-55.....	180	0-375-40.....	179
0-327-11.....	165	0-331-37.....	164	0-351-05.....	106	0-371-56.....	180	0-375-50.....	179
0-327-12.....	165	0-331-38.....	164	0-351-06.....	106	0-371-58.....	180	0-375-51.....	179
0-327-13.....	165	0-331-42.....	164	0-351-07.....	106	0-371-59.....	180	0-375-52.....	179
0-327-14.....	165	0-331-46.....	164	0-351-08.....	106	0-371-60.....	180	0-375-53.....	179
0-327-15.....	165	0-331-50.....	164	0-351-09.....	106	0-371-61.....	180	0-375-54.....	179
0-327-16.....	165	0-331-51.....	164	0-351-10.....	106	0-371-65.....	180	0-375-55.....	179
0-327-17.....	165	0-331-55.....	164	0-351-11.....	107	0-371-66.....	180	0-375-57.....	179
0-327-19.....	165	0-331-58.....	164	0-351-14.....	107	0-371-90.....	189	0-375-60.....	179
0-327-20.....	165	0-331-63.....	169	0-351-20.....	107	0-371-91.....	189	0-375-65.....	179
0-327-30.....	165	0-331-69.....	169	0-351-29.....	107	0-371-99.....	189	0-375-70.....	179
0-327-40.....	165	0-331-98.....	165	0-351-51.....	107	0-372-00.....	185	0-375-75.....	179
0-327-41.....	165	0-331-99.....	165	0-351-55.....	107	0-372-02.....	179	0-375-80.....	179
0-327-42.....	165	0-332-03.....	168	0-351-56.....	107	0-372-03.....	179	0-375-85.....	179
0-327-50.....	165	0-332-04.....	168	0-351-59.....	107	0-372-04.....	179	0-375-90.....	179
0-327-51.....	165	0-332-05.....	168	0-351-90.....	106	0-372-05.....	179	0-375-99.....	180
0-327-52.....	165	0-332-06.....	168	0-355-10.....	184	0-372-07.....	179	0-376-00.....	188
0-327-53.....	165	0-332-07.....	168	0-355-20.....	184	0-372-10.....	179	0-376-01.....	188
0-327-60.....	165	0-332-09.....	168	0-355-30.....	184	0-372-15.....	179	0-376-02.....	188
0-327-61.....	165	0-332-11.....	168	0-355-40.....	184	0-372-20.....	179	0-376-03.....	188
0-327-62.....	165	0-332-14.....	168	0-355-50.....	184	0-372-25.....	179	0-376-10.....	181, 195
0-327-63.....	165	0-332-16.....	168	0-362-03.....	182	0-372-30.....	179	0-376-12.....	181
0-327-64.....	165	0-332-55.....	168	0-362-04.....	182	0-372-50.....	179	0-376-15.....	181, 195
0-327-65.....	165	0-332-56.....	168	0-362-05.....	182	0-372-52.....	179	0-376-17.....	181
0-327-66.....	165	0-332-57.....	168	0-362-07.....	182	0-372-53.....	179	0-376-20.....	181, 195
0-327-67.....	165	0-332-58.....	168	0-362-10.....	182	0-372-54.....	179	0-376-22.....	181
0-327-70.....	165	0-332-65.....	168	0-362-15.....	182	0-372-55.....	179	0-376-25.....	181, 195
0-327-71.....	165	0-332-66.....	168	0-362-20.....	182	0-372-57.....	179	0-376-30.....	181
0-327-72.....	165	0-332-67.....	168	0-362-25.....	182	0-372-60.....	179	0-376-35.....	181
0-327-73.....	165	0-332-68.....	168	0-362-30.....	182	0-372-65.....	179	0-376-40.....	181
0-327-74.....	165	0-333-00.....	195	0-363-00.....	276	0-372-70.....	179	0-376-45.....	181
0-327-75.....	165	0-333-02.....	167	0-363-06.....	276	0-372-75.....	179	0-376-50.....	188
0-327-76.....	165	0-333-03.....	167	0-363-10.....	276	0-372-80.....	179	0-376-55.....	181
0-328-04.....	164	0-333-04.....	167	0-363-19.....	276	0-372-90.....	188	0-376-60.....	189
0-328-07.....	164	0-333-06.....	167	0-364-00.....	115	0-372-99.....	188	0-376-65.....	180, 195
0-328-10.....	164	0-333-09.....	167	0-364-01.....	115	0-373-01.....	185, 195	0-376-67.....	180, 195
0-328-11.....	164	0-333-12.....	167	0-364-11.....	115	0-373-02.....	185, 195	0-376-70.....	180, 195
0-328-13.....	164	0-333-19.....	167	0-364-50.....	115	0-373-03.....	185, 195	0-376-75.....	180, 195
0-328-17.....	164	0-333-25.....	167	0-365-02.....	181	0-373-05.....	185, 195	0-376-80.....	180, 195
0-328-22.....	164	0-333-38.....	167	0-365-03.....	181	0-373-08.....	185, 195	0-376-82.....	180, 195
0-328-26.....	164	0-333-52.....	167	0-365-04.....	181	0-373-15.....	185, 195	0-376-83.....	180, 195
0-328-29.....	164	0-333-53.....	167	0-365-05.....	181	0-373-20.....	185	0-376-85.....	189
0-328-54.....	164	0-333-54.....	167	0-365-07.....	181	0-373-51.....	185	0-376-89.....	189
0-329-00.....	195	0-333-56.....	167	0-365-10.....	181	0-373-52.....	185	0-376-90.....	189
0-329-03.....	168, 195	0-333-59.....	167	0-365-15.....	181	0-373-53.....	185	0-376-91.....	189

NUMERICAL INDEX

0-376-99	189	0-379-78	182	0-420-13	68	0-422-55	90	0-442-98	50
0-377-00	188	0-379-80	182	0-420-14	71	0-431-05	140	0-442-99	50
0-377-20	180	0-379-82	182	0-420-15	67	0-431-20	140	0-443-00	55
0-377-30	180	0-380-06	186	0-420-16	68	0-431-35	140	0-443-01	53
0-377-40	180	0-380-08	186	0-420-17	68	0-431-45	140	0-443-02	53
0-377-50	180	0-380-10	186	0-420-18	63	0-431-55	140	0-443-04	53
0-377-60	180	0-380-15	186	0-420-19	63	0-431-75	140	0-443-12	55
0-377-70	180	0-380-20	186	0-420-21	71	0-431-83	140	0-443-17	53
0-377-80	180	0-380-25	186	0-420-22	61	0-431-85	140	0-443-18	53
0-377-90	188	0-380-30	186	0-420-23	61	0-431-87	140	0-443-31	54
0-378-00	189	0-380-55	186	0-420-24	61	0-431-93	140	0-443-32	54
0-378-10	180	0-380-60	186	0-420-25	61	0-431-95	140	0-443-33	54
0-378-13	181, 195	0-380-65	186	0-420-26	61	0-431-97	140	0-443-34	54
0-378-14	181, 195	0-381-06	186	0-420-27	61	0-431-98	140	0-443-40	52
0-378-15	181, 195	0-381-08	186	0-420-28	69	0-431-99	140	0-443-41	52
0-378-16	181, 195	0-381-10	186	0-420-29	69	0-432-05	140	0-443-42	52
0-378-17	181	0-381-15	186	0-420-30	61	0-432-20	140	0-443-43	52
0-378-18	181	0-381-20	186	0-420-31	61	0-432-35	140	0-443-44	52
0-378-20	181, 195	0-381-55	186	0-420-32	65	0-432-45	140	0-443-46	52
0-378-22	181	0-381-60	186	0-420-33	63	0-432-55	140	0-443-48	53
0-378-25	181	0-381-65	186	0-420-34	60	0-432-75	140	0-443-49	53
0-378-30	180, 195	0-381-70	186	0-420-35	60	0-432-99	140	0-443-51	54
0-378-33	181	0-381-75	186	0-420-36	71	0-441-00	47	0-443-60	55
0-378-40	180, 195	0-381-80	186	0-420-37	66	0-441-02	47	0-443-65	55
0-378-50	180, 195	0-381-85	186	0-420-38	70	0-441-05	47	0-443-70	55
0-378-60	180	0-381-90	186	0-420-39	70	0-441-07	47	0-443-75	55
0-378-80	180	0-381-95	186	0-420-41	62	0-441-10	47	0-443-81	53
0-378-85	189	0-381-99	186	0-420-42	71	0-441-12	48	0-443-82	53
0-379-02	183	0-382-10	187	0-420-44	60	0-441-15	47	0-443-85	52
0-379-03	183, 195	0-382-15	187	0-420-45	60	0-441-20	48	0-443-98	55
0-379-04	183, 195	0-382-55	186	0-420-46	60	0-441-25	47	0-443-99	54
0-379-05	183, 195	0-382-56	186	0-420-47	60	0-441-30	47	0-444-01	59
0-379-06	183, 195	0-382-58	186	0-420-48	70	0-441-32	47	0-444-03	59
0-379-08	184, 195	0-382-60	186	0-420-49	71	0-441-35	47	0-444-19	59
0-379-09	184, 195	0-382-65	186	0-420-60	63	0-441-40	51	0-444-39	59
0-379-10	184, 195	0-382-70	186	0-420-61	63	0-441-41	51	0-444-41	57
0-379-11	184, 195	0-382-97	187	0-420-62	66	0-441-50	48	0-444-43	57
0-379-12	184, 195	0-383-05	187	0-420-66	62	0-441-55	49	0-444-55	59
0-379-13	182	0-383-55	186	0-420-67	62	0-441-56	49	0-444-59	57
0-379-14	182	0-383-58	186	0-420-68	66	0-441-57	49	0-444-75	59
0-379-15	183, 195	0-383-60	186	0-420-70	63	0-441-60	49	0-444-85	57
0-379-16	183	0-383-98	186	0-420-71	66	0-441-61	49	0-444-93	59
0-379-17	183, 195	0-383-99	186	0-420-72	66	0-441-62	49	0-444-99	59
0-379-18	183, 195	0-384-05	187	0-420-74	61	0-441-63	47	0-445-01	59
0-379-19	183	0-384-07	187	0-420-75	71	0-441-64	47	0-445-06	56
0-379-20	183, 195	0-384-10	187	0-420-76	62	0-441-65	46	0-445-08	56
0-379-30	183	0-384-15	187	0-420-77	62	0-441-66	47	0-445-10	57
0-379-32	183, 195	0-384-20	187	0-420-78	62	0-441-67	46	0-445-14	57
0-379-33	183, 195	0-384-25	187	0-420-79	66	0-441-70	46	0-445-15	57
0-379-34	183, 195	0-384-97	187	0-420-82	65	0-441-72	46	0-445-16	58
0-379-35	183	0-384-98	187	0-420-83	71	0-441-74	46	0-445-19	59
0-379-36	183, 195	0-384-99	187	0-420-84	71	0-441-75	46	0-445-20	59
0-379-44	183, 195	0-385-98	187	0-420-85	71	0-441-76	46	0-445-21	59
0-379-46	183	0-385-99	187	0-420-86	60	0-441-77	46	0-445-24	56
0-379-47	183	0-388-20	187	0-420-87	60	0-441-80	48	0-445-26	56
0-379-53	182	0-388-30	187	0-420-88	67	0-441-85	49	0-445-27	56
0-379-54	182	0-388-40	187	0-420-89	67	0-442-00	50	0-445-36	57
0-379-55	182	0-388-50	187	0-420-90	67	0-442-02	50	0-445-54	57
0-379-56	182	0-388-60	187	0-420-91	67	0-442-04	50	0-445-60	56
0-379-57	182	0-388-70	187	0-420-92	67	0-442-05	50	0-445-75	58
0-379-58	182, 195	0-388-97	187	0-420-93	67	0-442-07	50	0-445-77	58
0-379-60	182, 195	0-393-06	177	0-420-94	67	0-442-10	50	0-445-85	58
0-379-62	182, 195	0-393-09	177	0-420-96	68	0-442-11	50	0-445-86	58
0-379-63	182	0-393-12	177	0-420-98	71	0-442-12	50	0-445-88	56
0-379-64	182	0-393-18	177	0-421-20	64	0-442-15	50	0-445-90	58, 59
0-379-65	182	0-393-21	177	0-421-21	64	0-442-17	50	0-445-94	58
0-379-66	182	0-420-02	70	0-421-22	64	0-442-20	50	0-445-95	58
0-379-67	182	0-420-03	70	0-421-25	64	0-442-21	50	0-445-97	58
0-379-68	182	0-420-04	60	0-421-30	65	0-442-22	50	0-445-99	58
0-379-70	182	0-420-06	70	0-421-31	65	0-442-29	51	0-446-01	59
0-379-73	182	0-420-07	70	0-421-32	65	0-442-30	50	0-446-60	51
0-379-74	182	0-420-08	64	0-422-20	90	0-442-35	50	0-446-61	51
0-379-75	182	0-420-09	64	0-422-21	90	0-442-40	50	0-446-84	59
0-379-76	182	0-420-11	64	0-422-22	90	0-442-93	50	0-446-86	59
0-379-77	182	0-420-12	68	0-422-23	90	0-442-94	50	0-446-88	51

NUMERICAL INDEX

0-446-89.....	51	0-465-19.....	220	0-496-02.....	119	0-528-00.....	172	0-560-04.....	156
0-446-97.....	58	0-465-26.....	220	0-496-40.....	118	0-530-01.....	113	0-560-11.....	156
0-446-98.....	59	0-465-29.....	220	0-496-50.....	117	0-530-02.....	113	0-560-12.....	156
0-447-30.....	194	0-465-69.....	220	0-496-60.....	118	0-530-51.....	113	0-560-13.....	156
0-447-36.....	169, 194	0-465-79.....	220	0-505-05.....	91	0-531-00.....	113	0-561-12.....	25
0-447-39.....	169, 194	0-465-99.....	220, 221	0-505-10.....	91	0-531-01.....	113	0-561-24.....	25
0-447-42.....	169, 194	0-466-00.....	141	0-505-25.....	91	0-531-02.....	113	0-561-62.....	25
0-447-46.....	169, 194	0-466-01.....	141	0-505-30.....	91	0-531-04.....	113	0-561-74.....	25
0-447-50.....	169, 194	0-466-50.....	163	0-505-50.....	91	0-531-05.....	113	0-562-00.....	27
0-447-55.....	169, 194	0-467-40.....	280	0-505-55.....	91	0-531-10.....	113	0-562-12.....	27
0-447-62.....	169	0-467-41.....	280	0-505-60.....	91	0-531-11.....	113	0-562-24.....	27
0-447-68.....	169	0-467-42.....	280	0-507-10.....	91	0-531-13.....	113	0-562-62.....	27
0-447-70.....	169	0-467-43.....	280	0-510-00.....	229	0-531-18.....	113	0-562-74.....	27
0-448-25.....	291	0-468-00.....	290	0-521-00.....	221	0-531-25.....	113	0-564-00.....	26
0-448-27.....	291	0-469-00.....	290	0-521-03.....	221	0-531-30.....	113	0-564-01.....	26
0-448-40.....	291	0-470-00.....	290	0-523-01.....	222	0-533-01.....	223	0-564-02.....	26
0-448-41.....	291	0-470-68.....	290	0-523-03.....	222	0-533-02.....	223	0-564-03.....	26
0-448-75.....	291	0-472-00.....	276	0-523-06.....	222	0-533-15.....	223	0-564-06.....	26
0-449-75.....	291	0-472-06.....	276	0-523-08.....	224	0-533-16.....	223	0-564-11.....	25
0-450-10.....	291	0-472-19.....	276	0-523-15.....	222	0-533-23.....	223	0-564-12.....	25
0-450-11.....	291	0-473-16.....	219	0-523-17.....	222	0-533-73.....	223	0-564-13.....	25
0-450-20.....	291	0-473-19.....	219	0-523-18.....	225	0-533-91.....	223	0-564-21.....	25
0-450-21.....	291	0-474-00.....	221	0-523-20.....	222	0-533-92.....	223	0-564-25.....	26
0-450-50.....	292	0-477-03.....	221	0-523-22.....	222	0-533-98.....	223	0-564-55.....	27
0-450-51.....	292	0-477-07.....	219	0-523-23.....	222	0-533-99.....	226	0-564-60.....	26
0-450-70.....	292	0-477-13.....	219	0-523-51.....	222	0-534-05.....	215	0-564-62.....	27
0-450-80.....	292	0-477-16.....	218	0-523-56.....	222	0-534-10.....	215	0-564-70.....	26
0-450-81.....	292	0-477-19.....	218	0-523-58.....	224	0-534-13.....	289	0-564-75.....	27
0-450-90.....	292	0-477-26.....	218	0-523-65.....	222	0-534-15.....	215	0-564-80.....	26
0-450-99.....	292	0-477-29.....	218	0-523-67.....	222	0-534-26.....	289	0-566-00.....	178
0-452-30.....	194	0-477-36.....	218	0-523-68.....	224	0-534-29.....	289	0-567-09.....	177
0-452-36.....	169, 194	0-477-39.....	218	0-523-70.....	223	0-534-30.....	287	0-567-12.....	177
0-452-39.....	169, 194	0-477-46.....	219	0-523-72.....	222	0-534-70.....	289	0-567-15.....	177
0-452-42.....	169, 194	0-477-49.....	219	0-523-73.....	222	0-534-75.....	287	0-567-18.....	177
0-452-46.....	169, 194	0-477-56.....	218	0-523-78.....	223	0-537-47.....	69	0-568-06.....	177
0-452-50.....	169, 194	0-477-59.....	218	0-523-89.....	222	0-537-49.....	69	0-568-09.....	177
0-452-55.....	169, 194	0-477-66.....	218	0-523-91.....	222	0-537-54.....	71	0-568-12.....	177
0-452-62.....	169	0-477-69.....	218	0-523-92.....	222	0-538-53.....	70	0-568-15.....	177
0-452-68.....	169	0-477-76.....	218	0-523-93.....	222	0-539-51.....	100	0-568-18.....	177
0-452-70.....	169	0-477-79.....	218	0-523-95.....	222	0-541-20.....	283	0-568-21.....	177
0-453-01.....	89	0-477-86.....	218	0-523-96.....	222	0-541-31.....	66	0-574-12.....	176
0-453-03.....	89	0-477-89.....	218	0-523-97.....	226	0-541-35.....	283	0-574-15.....	176
0-453-04.....	89	0-477-96.....	218	0-523-98.....	226	0-541-97.....	66	0-574-18.....	176
0-453-50.....	89	0-477-99.....	218	0-523-99.....	226	0-541-98.....	66	0-574-24.....	176
0-453-51.....	89	0-478-16.....	219	0-524-00.....	275	0-550-00.....	288	0-577-20.....	106
0-453-52.....	89	0-478-19.....	219	0-524-08.....	274	0-550-02.....	288	0-578-00.....	206
0-453-70.....	89	0-478-26.....	219	0-524-10.....	274	0-550-03.....	288	0-578-03.....	207
0-453-75.....	89	0-478-29.....	219	0-524-16.....	274	0-550-06.....	288	0-578-05.....	206
0-453-80.....	89	0-479-16.....	219	0-524-23.....	274	0-550-10.....	288	0-578-06.....	207
0-455-00.....	290	0-479-19.....	219	0-524-50.....	274	0-550-19.....	288	0-578-10.....	206
0-455-18.....	290	0-479-67.....	219	0-524-73.....	274	0-557-00.....	171	0-578-12.....	207
0-455-58.....	290	0-480-16.....	219	0-524-74.....	274	0-557-01.....	171	0-578-18.....	207
0-455-63.....	290	0-480-19.....	219	0-524-98.....	274	0-557-02.....	171	0-578-20.....	206
0-455-68.....	290	0-483-00.....	120	0-525-01.....	224	0-557-04.....	171	0-578-22.....	206
0-460-00.....	290	0-484-00.....	120	0-525-03.....	221	0-557-05.....	171	0-578-24.....	207
0-462-16.....	220	0-484-50.....	121	0-525-06.....	224	0-557-07.....	171	0-578-55.....	206
0-462-19.....	220	0-485-00.....	121	0-525-10.....	225	0-557-08.....	171	0-578-56.....	207
0-462-26.....	220	0-485-01.....	121	0-525-12.....	225	0-557-09.....	171	0-578-74.....	207
0-462-29.....	220	0-485-02.....	121	0-525-15.....	224	0-557-21.....	173	0-579-51.....	123
0-462-69.....	220	0-485-03.....	121	0-525-16.....	224	0-557-29.....	173	0-579-60.....	106
0-462-79.....	220	0-485-04.....	121	0-525-20.....	225	0-557-37.....	172	0-584-00.....	190
0-463-00.....	221	0-485-05.....	122	0-525-22.....	225	0-557-38.....	172	0-584-02.....	190
0-463-16.....	220	0-485-50.....	121	0-525-23.....	224	0-557-39.....	172	0-584-90.....	190
0-463-19.....	220	0-485-75.....	121	0-525-72.....	225	0-557-48.....	171	0-590-00.....	221
0-463-26.....	220	0-485-90.....	122	0-525-80.....	225	0-557-50.....	172	0-591-00.....	190
0-463-29.....	220	0-485-91.....	122	0-525-85.....	224	0-557-52.....	172	0-591-50.....	190
0-463-69.....	220	0-485-92.....	121	0-525-86.....	224	0-557-60.....	173	0-592-00.....	172
0-463-79.....	220	0-486-00.....	123	0-525-92.....	225	0-557-61.....	173	0-593-00.....	234
0-464-16.....	220	0-486-01.....	123	0-525-93.....	225	0-557-75.....	172	0-593-01.....	234
0-464-19.....	220	0-486-02.....	123	0-525-94.....	225	0-557-78.....	172	0-593-03.....	235
0-464-26.....	220	0-495-00.....	117	0-525-95.....	225	0-557-80.....	173	0-593-04.....	235
0-464-29.....	220	0-495-60.....	103	0-525-96.....	225	0-557-81.....	173	0-593-05.....	235
0-464-69.....	220	0-495-99.....	103	0-526-00.....	240	0-557-82.....	173	0-593-06.....	235
0-464-79.....	220	0-496-00.....	117	0-526-05.....	240	0-557-83.....	173	0-593-07.....	235
0-465-16.....	220	0-496-01.....	118	0-527-00.....	172	0-560-02.....	156	0-593-12.....	233

NUMERICAL INDEX

0-593-16	235	0-603-05	115	0-620-00	291	0-649-28	270	0-668-37	76
0-593-18	235	0-603-06	119	0-620-01	291	0-649-40	270	0-668-40	73
0-593-24	233	0-603-10	115	0-621-06	176	0-649-45	271	0-668-41	72
0-593-51	235	0-603-50	115	0-621-09	176	0-649-70	271	0-668-42	72
0-593-53	235	0-603-60	116	0-621-12	176	0-649-75	271	0-668-43	72
0-593-54	235	0-603-99	119	0-621-59	176	0-649-91	271	0-668-51	73
0-593-55	235	0-605-00	102	0-621-62	176	0-649-92	271	0-668-52	73
0-593-56	235	0-605-01	103	0-622-06	176	0-649-93	270	0-668-53	73
0-593-62	233	0-605-02	103	0-622-09	176	0-650-00	239	0-668-55	72
0-593-74	233	0-605-05	102	0-622-12	176	0-650-01	239	0-668-56	72
0-594-00	234	0-605-09	105	0-623-06	176	0-656-00	120	0-668-57	72
0-594-01	234	0-605-10	104	0-623-09	176	0-656-02	120	0-668-66	72
0-594-02	234	0-605-11	104	0-623-12	176	0-656-03	120	0-668-67	75
0-594-03	234	0-605-12	104	0-623-59	176	0-656-04	120	0-668-68	75
0-594-05	233	0-605-13	104	0-623-62	176	0-656-05	120	0-668-69	75
0-594-15	233	0-605-19	102, 103	0-642-00	238	0-657-00	124	0-668-73	75
0-594-27	233	0-605-20	102	0-642-01	237	0-657-01	124	0-668-76	75
0-594-33	233	0-605-21	103	0-642-04	238	0-657-02	124	0-668-80	76
0-594-36	233	0-605-22	103	0-642-14	236	0-657-03	124	0-668-81	76
0-594-45	233	0-605-26	104	0-642-15	236	0-657-11	124	0-668-87	75
0-594-46	233	0-605-33	105	0-642-16	236	0-657-12	124	0-668-88	75
0-594-47	233	0-605-40	105	0-642-17	236	0-657-13	124	0-668-89	75
0-594-51	233	0-605-43	105	0-642-18	236	0-657-20	125	0-668-92	74
0-594-53	233	0-605-44	105	0-642-19	236	0-657-21	125	0-668-93	76
0-594-54	233	0-605-45	105	0-642-24	236	0-657-22	125	0-668-94	76
0-594-59	233	0-605-50	102	0-642-26	236	0-657-30	125	0-668-95	76
0-594-60	233	0-605-51	103	0-642-27	236	0-657-31	125	0-669-13	76
0-594-65	233	0-605-52	102	0-642-28	237	0-657-32	125	0-669-25	76
0-594-66	234	0-605-55	102, 103	0-642-30	236	0-657-37	125	0-669-40	281
0-594-68	234	0-605-60	102	0-642-31	236	0-657-38	125	0-669-41	281
0-594-69	234	0-605-61	102	0-642-32	236	0-657-39	125	0-669-91	281
0-594-70	234	0-605-62	102	0-642-33	236	0-657-40	125	0-673-12	240
0-594-71	234	0-605-64	102	0-642-34	236	0-657-50	125	0-673-24	240
0-594-72	234	0-605-65	102	0-642-48	236	0-657-99	124	0-673-63	240
0-596-00	162	0-605-70	104	0-642-50	237	0-658-00	116	0-673-64	240
0-597-14	122	0-605-80	104	0-642-51	237	0-658-01	116	0-673-65	240
0-597-15	122	0-605-90	103	0-642-52	237	0-658-02	117	0-673-66	240
0-597-20	122	0-605-96	102	0-642-53	237	0-658-03	116	0-673-75	240
0-597-50	122	0-605-97	104	0-642-55	237	0-658-11	116	0-673-76	240
0-598-00	162	0-605-98	103	0-642-60	237	0-658-50	123	0-673-77	240
0-599-00	162	0-605-99	102	0-642-62	238	0-658-51	116	0-674-00	280
0-601-00	214	0-606-00	252	0-642-65	237	0-661-12	176	0-674-20	280
0-601-01	215	0-606-11	252	0-642-66	237	0-661-18	176	0-674-96	280
0-601-03	215	0-606-12	251	0-642-67	237	0-661-24	176	0-674-97	280
0-601-06	216	0-606-50	252	0-642-70	238	0-662-12	176	0-674-99	280
0-601-07	215	0-607-04	114	0-642-74	238	0-662-18	176	0-675-00	162
0-601-08	215	0-607-05	114	0-645-00	117	0-662-24	176	0-684-01	293
0-601-09	215	0-607-10	114	0-645-11	118	0-663-12	176	0-684-16	293
0-601-11	215	0-607-24	114	0-645-50	122	0-663-18	176	0-684-19	293
0-601-12	214	0-607-25	114	0-645-60	120	0-664-25	291	0-684-25	294
0-601-13	214	0-607-30	114	0-645-70	120	0-665-55	91	0-684-66	293
0-601-16	214	0-607-32	114	0-646-22	239	0-665-70	91	0-684-69	293
0-601-19	215	0-607-34	114	0-646-50	120	0-665-75	91	0-687-01	116
0-601-24	214	0-607-35	114	0-647-02	272	0-665-80	91	0-687-11	116
0-601-26	214	0-607-40	114	0-647-03	272	0-665-94	103	0-687-50	116
0-601-27	214	0-607-55	114	0-647-04	272	0-668-03	74	0-688-00	162
0-601-29	215	0-607-75	114	0-647-06	273	0-668-04	74	0-689-00	162
0-601-50	214	0-608-00	216	0-647-10	273	0-668-05	74	0-690-50	122
0-601-51	216	0-608-01	216	0-647-20	273	0-668-06	73	0-690-51	122
0-601-52	216	0-609-02	114	0-647-31	272	0-668-10	74	0-690-54	122
0-601-54	216	0-609-04	114	0-647-34	272	0-668-11	74	0-690-55	122
0-601-55	214	0-609-05	114	0-647-36	272	0-668-13	74	0-690-60	122
0-601-57	216	0-609-10	114	0-647-42	272	0-668-14	74	0-692-09	217
0-601-58	216	0-609-51	114	0-647-55	273	0-668-18	73	0-692-16	217
0-601-61	216	0-609-53	114	0-647-60	273	0-668-21	72	0-692-19	217
0-601-62	216	0-609-56	114	0-647-96	272	0-668-22	72	0-692-66	217
0-601-69	216	0-609-57	114	0-647-97	272	0-668-23	72	0-693-09	217
0-601-90	214	0-609-59	114	0-647-98	272	0-668-25	74	0-693-16	217
0-601-91	216	0-609-62	114	0-647-99	272	0-668-27	73	0-693-19	217
0-601-92	214	0-609-64	114	0-648-30	273	0-668-29	73	0-693-66	217
0-603-00	115	0-609-65	114	0-648-31	273	0-668-30	74	0-693-69	217
0-603-01	115	0-609-70	114	0-648-80	273	0-668-32	75	0-693-90	217
0-603-02	115	0-612-00	118	0-649-07	293	0-668-33	75	0-693-98	221
0-603-03	119	0-613-00	291	0-649-10	293	0-668-34	75	0-693-99	221
0-603-04	115	0-615-00	172	0-649-22	270	0-668-35	75	0-695-09	217

NUMERICAL INDEX

0-695-16.....	217	0-711-02.....	288	0-727-59.....	251	0-744-25.....	253	0-775-41.....	18
0-695-19.....	217	0-711-06.....	288	0-727-60.....	251	0-744-26.....	253	0-775-42.....	38
0-695-66.....	218	0-711-10.....	288	0-727-62.....	245	0-744-34.....	251	0-775-43.....	33
0-695-67.....	218	0-711-19.....	288	0-727-63.....	246	0-744-36.....	252	0-775-44.....	20
0-695-69.....	218	0-711-50.....	288	0-727-64.....	246	0-744-37.....	252	0-775-45.....	20
0-695-90.....	217	0-711-56.....	288	0-727-68.....	247	0-744-38.....	252	0-775-46.....	33
0-695-99.....	221	0-711-60.....	288	0-727-70.....	245	0-744-44.....	253	0-775-47.....	17
0-696-03.....	184	0-714-03.....	140	0-727-71.....	245	0-744-54.....	253	0-775-48.....	37
0-696-05.....	184	0-715-00.....	227	0-727-72.....	245	0-744-62.....	252	0-775-49.....	42
0-696-13.....	184	0-715-01.....	227	0-727-74.....	245	0-767-40.....	83	0-775-51.....	14
0-696-53.....	184	0-715-13.....	228	0-727-76.....	246	0-767-41.....	84	0-775-53.....	20
0-696-55.....	184	0-715-14.....	228	0-727-83.....	210	0-767-42.....	84	0-775-54.....	37
0-696-63.....	184	0-715-23.....	228	0-728-02.....	248	0-767-43.....	84	0-775-55.....	33
0-697-00.....	163	0-715-24.....	228	0-728-04.....	248	0-767-44.....	84	0-775-56.....	14
0-697-10.....	163	0-717-00.....	227	0-728-06.....	247	0-767-60.....	84	0-775-57.....	14
0-697-15.....	163	0-717-01.....	227	0-728-12.....	247	0-767-70.....	84	0-775-58.....	38
0-697-20.....	163	0-717-05.....	228	0-728-13.....	248	0-767-97.....	84	0-775-59.....	11
0-698-01.....	293	0-717-10.....	228	0-728-14.....	247	0-770-00.....	28	0-775-60.....	38
0-698-16.....	293	0-717-11.....	228	0-728-15.....	247	0-770-04.....	28	0-775-61.....	11
0-698-18.....	293	0-717-12.....	228	0-728-16.....	248	0-770-07.....	28	0-775-63.....	38
0-698-19.....	293	0-717-13.....	228	0-728-20.....	248	0-770-08.....	28	0-775-64.....	41
0-698-25.....	294	0-717-23.....	228	0-728-23.....	248	0-770-09.....	28	0-775-66.....	15
0-698-68.....	293	0-717-25.....	228	0-728-24.....	247	0-771-00.....	28	0-775-67.....	15
0-698-69.....	293	0-717-33.....	228	0-728-25.....	248	0-771-04.....	28	0-775-68.....	15
0-699-61.....	283	0-718-08.....	294	0-728-26.....	247	0-774-00.....	11	0-775-70.....	19
0-699-62.....	281	0-723-80.....	294	0-728-27.....	247	0-774-01.....	11	0-775-71.....	41
0-699-63.....	281	0-726-06.....	245	0-728-30.....	249	0-774-02.....	9	0-775-72.....	41
0-699-64.....	281	0-726-12.....	245	0-728-31.....	249	0-774-03.....	11	0-775-73.....	41
0-699-66.....	283	0-726-13.....	244	0-728-32.....	250	0-774-04.....	11	0-775-74.....	41
0-699-67.....	282	0-726-24.....	245	0-728-33.....	250	0-774-06.....	10	0-775-76.....	9
0-699-68.....	282	0-726-25.....	244	0-728-34.....	250	0-774-10.....	36	0-775-77.....	9
0-699-71.....	282	0-726-30.....	249	0-728-40.....	248	0-774-14.....	8	0-775-78.....	9
0-699-72.....	282	0-727-02.....	244	0-728-42.....	248	0-774-26.....	13	0-775-80.....	30
0-699-73.....	282	0-727-06.....	246	0-728-62.....	247	0-774-27.....	13	0-775-81.....	42
0-699-74.....	282	0-727-07.....	246	0-728-63.....	248	0-774-50.....	23	0-775-84.....	42
0-699-86.....	281	0-727-08.....	246	0-728-70.....	248	0-774-51.....	23	0-775-86.....	9
0-699-92.....	281	0-727-09.....	246	0-728-72.....	248	0-774-55.....	23	0-775-87.....	8
0-699-95.....	281	0-727-10.....	246	0-728-74.....	247	0-774-70.....	34	0-775-88.....	9
0-702-00.....	284	0-727-11.....	244	0-728-75.....	248	0-774-71.....	34	0-775-91.....	40
0-702-10.....	284	0-727-12.....	243	0-729-00.....	254	0-774-72.....	17	0-775-92.....	40
0-702-50.....	284	0-727-13.....	244	0-729-01.....	254	0-774-73.....	17	0-775-93.....	40
0-703-00.....	284	0-727-14.....	244	0-729-02.....	254	0-774-80.....	39	0-775-97.....	40
0-703-20.....	285	0-727-15.....	244	0-729-03.....	254	0-774-81.....	39	0-775-98.....	40
0-703-50.....	284	0-727-16.....	244	0-729-04.....	254	0-774-82.....	39	0-775-99.....	40
0-703-51.....	284	0-727-17.....	246	0-729-05.....	254	0-774-99.....	39	0-776-02.....	34
0-703-52.....	284	0-727-18.....	246	0-729-06.....	254	0-775-01.....	18	0-776-06.....	32
0-703-53.....	284	0-727-19.....	244	0-732-00.....	140	0-775-2.....	38	0-776-15.....	32
0-703-54.....	284	0-727-20.....	247	0-732-01.....	140	0-775-03.....	41	0-776-16.....	34
0-703-60.....	284	0-727-22.....	245	0-733-00.....	227	0-775-05.....	16	0-776-17.....	34
0-703-80.....	285	0-727-23.....	211	0-733-01.....	227	0-775-09.....	33	0-776-33.....	33
0-703-85.....	285	0-727-24.....	243	0-733-10.....	227	0-775-10.....	40	0-776-43.....	18
0-703-90.....	285	0-727-25.....	244	0-733-25.....	139	0-775-11.....	32	0-776-44.....	42
0-703-99.....	285	0-727-26.....	244	0-733-26.....	139	0-775-12.....	33	0-776-45.....	32
0-704-00.....	286	0-727-27.....	244	0-733-27.....	139	0-775-13.....	34	0-776-49.....	17
0-704-05.....	286	0-727-28.....	244	0-733-35.....	139	0-775-14.....	40	0-776-50.....	42
0-704-10.....	286	0-727-29.....	244	0-733-36.....	139	0-775-17.....	17	0-776-52.....	33
0-704-15.....	286	0-727-32.....	245	0-733-37.....	139	0-775-19.....	40	0-776-53.....	36
0-704-20.....	286	0-727-33.....	210	0-735-00.....	239	0-775-20.....	41	0-776-56.....	33
0-704-21.....	286	0-727-34.....	245	0-736-00.....	240	0-775-21.....	40	0-776-60.....	20
0-704-50.....	286	0-727-35.....	212	0-737-00.....	239	0-775-22.....	40	0-776-61.....	20
0-704-55.....	286	0-727-40.....	245	0-740-XX.....	242	0-775-23.....	40	0-776-63.....	20
0-705-00.....	100	0-727-41.....	245	0-741-XX.....	242	0-775-25.....	40	0-776-66.....	14
0-705-01.....	100	0-727-42.....	245	0-742-12.....	243	0-775-26.....	35	0-776-67.....	14
0-705-02.....	100	0-727-43.....	210	0-742-24.....	243	0-775-27.....	17	0-776-68.....	35
0-705-03.....	100	0-727-44.....	245	0-743-12.....	243	0-775-28.....	41	0-776-69.....	34
0-705-11.....	100	0-727-47.....	245	0-743-23.....	76	0-775-29.....	38	0-776-70.....	34
0-705-12.....	100	0-727-50.....	247	0-744-00.....	251	0-775-30.....	16	0-776-72.....	15
0-705-21.....	100	0-727-51.....	249	0-744-10.....	252	0-775-31.....	37	0-776-73.....	36
0-705-22.....	100	0-727-52.....	249	0-744-11.....	252	0-775-32.....	41	0-776-74.....	39
0-705-23.....	100	0-727-53.....	249	0-744-12.....	252	0-775-34.....	15	0-776-75.....	16
0-705-24.....	100	0-727-54.....	250	0-744-13.....	251	0-775-35.....	36	0-776-76.....	36
0-705-25.....	100	0-727-55.....	250	0-744-16.....	252	0-775-36.....	9	0-776-79.....	41
0-705-26.....	100	0-727-56.....	250	0-744-22.....	251	0-775-37.....	32, 34	0-776-80.....	30
0-706-98.....	285	0-727-57.....	250	0-744-23.....	253	0-775-39.....	18	0-776-93.....	40
0-711-00.....	288	0-727-58.....	250	0-744-24.....	253	0-775-40.....	38	0-776-94.....	40

NUMERICAL INDEX

0-776-95	40	0-798-00	287	0-863-05	231	0-890-30	232	0-932-25	128
0-776-96	40	0-798-10	108	0-863-65	231	0-890-35	232	0-932-27	128
0-776-97	41	0-798-11	108	0-863-85	231	0-890-40	232	0-932-28	128
0-777-00	227	0-798-95	108	0-864-05	231	0-891-00	232	0-932-31	128
0-777-02	227	0-798-96	287	0-864-80	231	0-891-01	232	0-932-34	128
0-777-15	229	0-798-98	108	0-864-95	231	0-892-00	232	0-932-35	128
0-777-23	229	0-798-99	108	0-865-10	231	0-893-50	232	0-932-37	128
0-777-24	229	0-799-12	287	0-865-90	231	0-893-60	232	0-932-38	128
0-779-00	111	0-799-50	287	0-866-80	231	0-893-70	232	0-932-40	128
0-779-01	111	0-799-51	287	0-866-90	231	0-893-80	232	0-932-41	128
0-779-02	111	0-799-52	287	0-867-00	231	0-894-30	232	0-932-42	128
0-779-51	110	0-833-00	258	0-867-01	231	0-894-40	232	0-932-43	128
0-779-52	110	0-833-06	258	0-870-05	23	0-894-50	232	0-932-45	128
0-780-10	111	0-834-10	185	0-870-10	22	0-894-60	232	0-932-46	128
0-780-11	111	0-845-03	258	0-870-20	24	0-895-50	232	0-932-47	128
0-780-20	111	0-852-00	225	0-870-25	24	0-895-60	232	0-932-48	128
0-780-21	111	0-852-02	213	0-870-30	23	0-895-70	232	0-932-51	128
0-780-23	111	0-852-04	213	0-870-32	23	0-895-80	232	0-932-54	128
0-780-51	108	0-852-10	213	0-870-34	23	0-896-01	230	0-932-57	128
0-780-61	108	0-852-50	212	0-870-35	23	0-896-02	230	0-932-58	128
0-781-10	111	0-852-51	212	0-870-36	23	0-896-03	230	0-932-61	128
0-781-11	111	0-852-52	212	0-870-40	22	0-896-04	230	0-932-67	128
0-781-20	111	0-852-53	212	0-870-45	22	0-896-05	230	0-932-71	128
0-781-21	111	0-852-62	211	0-870-50	43	0-896-06	230	0-932-72	128
0-781-23	111	0-852-72	211	0-870-51	43	0-896-07	230	0-932-73	128
0-781-51	108	0-856-00	198, 202	0-870-52	43	0-896-08	230	0-932-74	128
0-781-61	108	0-856-01	199, 202	0-870-53	43	0-896-10	230	0-932-75	128
0-782-10	111	0-856-02	199, 202	0-870-54	43	0-896-11	230	0-932-81	128
0-782-12	111	0-856-05	199, 202	0-870-60	43	0-896-12	230	0-932-82	128
0-782-20	111	0-856-10	199, 202	0-870-90	22	0-896-13	230	0-932-87	128
0-782-22	111	0-856-15	199, 202	0-870-91	22	0-896-14	230	0-933-01	128
0-782-23	111	0-856-16	199, 202	0-870-95	22	0-896-15	230	0-933-02	128
0-782-52	108	0-856-20	198, 202	0-870-97	24	0-896-16	230	0-933-03	128
0-782-62	108	0-856-22	199, 202	0-870-98	24	0-896-17	230	0-933-04	128
0-783-12	111	0-856-25	198, 202	0-875-01	21	0-930-01	128	0-933-05	128
0-784-10	111	0-856-26	198, 202	0-875-02	21	0-930-02	128	0-933-06	128
0-784-12	111	0-856-30	199, 202	0-875-08	21	0-930-03	128	0-933-07	128
0-784-20	111	0-856-40	198, 202	0-875-11	21	0-930-04	128	0-933-08	128
0-784-22	111	0-856-41	198, 202	0-875-12	21	0-930-05	128	0-933-09	128
0-784-23	111	0-856-51	199, 203	0-875-18	21	0-930-06	128	0-933-10	128
0-784-52	108	0-856-52	199, 203	0-875-60	21	0-930-07	128	0-933-11	128
0-784-62	108	0-856-55	199, 203	0-876-07	31	0-930-08	128	0-933-15	128
0-785-10	111	0-856-60	199, 203	0-876-08	19	0-930-09	128	0-933-25	128
0-785-12	111	0-856-65	199, 203	0-876-09	19	0-930-10	128	0-933-27	128
0-785-20	111	0-856-66	199, 203	0-876-10	37	0-930-11	128	0-933-40	128
0-785-23	111	0-856-70	198, 203	0-876-17	32	0-931-01	128	0-933-41	128
0-785-52	108	0-856-72	199, 203	0-876-18	32	0-931-02	128	0-933-45	128
0-785-62	108	0-856-75	198, 203	0-876-25	41	0-931-03	128	0-933-75	128
0-786-10	111	0-856-76	198, 203	0-876-27	41	0-931-04	128	0-934-01	129
0-786-12	111	0-856-80	199, 203	0-876-28	30	0-931-05	128	0-934-03	129
0-786-20	111	0-856-97	199	0-876-35	31	0-931-06	128	0-934-05	129
0-786-22	111	0-856-98	199	0-876-36	31	0-931-07	128	0-935-01	129
0-786-23	111	0-857-01	201, 204	0-876-39	10	0-931-08	128	0-935-03	129
0-786-52	108	0-857-02	201, 204	0-876-41	10	0-931-09	128	0-935-05	129
0-786-62	108	0-857-05	201, 204	0-876-43	10	0-931-10	128	0-936-01	129
0-787-10	111	0-857-08	201, 204	0-876-48	8	0-931-11	128	0-936-03	129
0-787-12	111	0-857-10	200, 204	0-876-55	30	0-931-40	128	0-936-05	129
0-787-13	111	0-857-15	201, 204	0-876-57	30	0-932-01	128	0-937-01	129
0-788-10	111	0-857-16	200, 204	0-876-59	30	0-932-02	128	0-937-03	129
0-789-10	111	0-857-20	200, 204	0-876-62	37	0-932-03	128	0-937-05	129
0-789-12	111	0-857-22	201, 204	0-876-63	32	0-932-04	128	0-938-01	129
0-789-13	111	0-857-25	200, 204	0-876-64	32	0-932-05	128	0-938-03	129
0-789-62	108	0-857-27	201, 204	0-876-68	31	0-932-06	128	0-938-05	129
0-790-00	215	0-857-30	200, 204	0-876-80	30	0-932-07	128	0-939-01	129
0-791-XX	112	0-857-51	201, 205	0-876-99	10, 13	0-932-08	128	0-939-03	129
0-792-XX	112	0-857-52	201, 205	0-883-85	231	0-932-09	128	0-939-05	129
0-793-00	110	0-857-58	201, 205	0-884-05	231	0-932-10	128	0-940-01	129
0-793-01	110	0-857-60	200, 204	0-884-80	231	0-932-11	128	0-940-05	129
0-793-50	110	0-857-65	201, 205	0-884-95	231	0-932-12	128	0-941-01	130
0-793-99	110	0-857-66	200, 205	0-885-10	231	0-932-14	128	0-941-02	130
0-794-01	110	0-857-72	201, 205	0-885-90	231	0-932-15	128	0-941-03	130
0-794-02	110	0-857-75	200, 205	0-886-10	231	0-932-18	128	0-941-04	130
0-794-03	110	0-857-77	201, 205	0-886-80	231	0-932-21	128	0-941-05	130
0-795-XX	109	0-862-05	231	0-887-00	231	0-932-23	128	0-941-06	130
0-796-XX	109	0-862-85	231	0-887-01	231	0-932-24	128	0-941-07	130

NUMERICAL INDEX

0-941-08.....	130	0-945-01.....	131	0-993-40.....	134	2-001-26.....	147	2-558-10.....	143
0-941-09.....	130	0-945-02.....	131	0-993-50.....	134	2-001-27.....	148	2-558-99.....	145
0-941-10.....	130	0-945-03.....	131	0-994-50.....	133	2-001-28.....	147	2-559-01.....	143
0-941-11.....	130	0-945-05.....	131	0-994-60.....	133	2-001-29.....	148	2-559-10.....	143
0-941-15.....	130	0-945-08.....	131	0-995-00.....	134	2-001-30.....	148	2-726-12.....	245
0-941-28.....	130	0-945-38.....	131	0-995-50.....	134	2-001-31.....	150	2-726-24.....	245
0-941-40.....	130	0-946-01.....	131	0-997-00.....	135	2-001-32.....	149	2-727-12.....	243
0-942-01.....	130	0-946-03.....	131	0-997-05.....	135	2-001-33.....	149	2-727-16.....	244
0-942-02.....	130	0-946-05.....	131	0-997-10.....	135	2-001-34.....	148	2-727-18.....	246
0-942-03.....	130	0-947-01.....	131	0-997-15.....	134	2-001-35.....	150	2-727-24.....	243
0-942-04.....	130	0-947-03.....	131	0-997-20.....	134	2-001-36.....	149	2-727-32.....	245
0-942-05.....	130	0-947-05.....	131	0-997-60.....	135	2-001-37.....	149	2-727-40.....	245
0-942-06.....	130	0-948-01.....	131	0-997-65.....	135	2-001-38.....	150	2-727-44.....	245
0-942-07.....	130	0-948-03.....	131	0-998-01.....	135	2-001-39.....	146	2-727-47.....	245
0-942-08.....	130	0-948-05.....	131	0-999-13.....	135	2-001-40.....	148	2-727-70.....	245
0-942-09.....	130	0-949-01.....	131	0-999-63.....	135	2-001-41.....	148	2-727-71.....	245
0-942-10.....	130	0-949-03.....	131	1-017-01.....	144	2-001-42.....	150	2-728-12.....	247
0-942-11.....	130	0-949-05.....	131	1-018-01.....	143	2-001-43.....	150	2-728-13.....	248
0-942-12.....	130	0-950-01.....	131	1-018-10.....	143	2-001-44.....	150	2-728-14.....	247
0-942-14.....	130	0-950-03.....	131	1-020-01.....	142	2-001-45.....	146	2-728-15.....	247
0-942-15.....	130	0-950-05.....	131	1-020-10.....	142	2-001-46.....	148	2-728-24.....	247
0-942-18.....	130	0-951-00.....	132	1-023-00.....	144	2-001-47.....	148	2-728-25.....	248
0-942-21.....	130	0-951-50.....	132	1-100-01.....	144	2-001-48.....	146	2-728-26.....	247
0-942-23.....	130	0-951-51.....	133	1-100-04.....	144	2-001-49.....	151	2-728-27.....	247
0-942-24.....	130	0-951-52.....	132	1-100-10.....	144	2-001-50.....	151	2-729-00.....	254
0-942-25.....	130	0-952-00.....	133	1-100-99.....	145	2-001-51.....	151	2-729-03.....	254
0-942-27.....	130	0-952-51.....	132	1-102-01.....	143	2-001-52.....	148	2-742-12.....	177
0-942-28.....	130	0-953-00.....	132	1-102-10.....	143	2-001-53.....	150	2-742-21.....	177
0-942-31.....	130	0-953-50.....	132	1-103-01.....	143	2-001-54.....	150	3-001-01.....	146
0-942-34.....	130	0-953-51.....	132	1-103-10.....	143	2-001-55.....	150	3-001-02.....	146
0-942-35.....	130	0-954-15.....	138	1-155-01.....	142	2-001-56.....	149	3-001-03.....	147
0-942-37.....	130	0-954-17.....	138	1-224-01.....	143	2-001-57.....	149	3-001-04.....	147
0-942-38.....	130	0-955-00.....	132	1-376-65.....	180	2-001-58.....	149	3-001-05.....	146
0-942-40.....	130	0-961-01.....	138	1-376-67.....	180	2-001-59.....	148	3-001-06.....	146
0-942-41.....	130	0-961-57.....	138	1-376-70.....	180	2-001-60.....	148	3-001-07.....	147
0-942-42.....	130	0-961-58.....	138	1-376-75.....	180	2-001-61.....	148	3-001-08.....	147
0-942-43.....	130	0-975-35.....	139	1-376-80.....	180	2-001-62.....	147	3-001-09.....	148
0-942-45.....	130	0-975-50.....	139	1-376-82.....	180	2-001-63.....	147	3-001-10.....	151
0-942-46.....	130	0-976-10.....	136	1-376-83.....	180	2-001-64.....	147	3-001-11.....	151
0-942-47.....	130	0-976-15.....	136	1-379-08.....	184	2-001-65.....	146	3-001-12.....	146
0-942-48.....	130	0-977-01.....	136	1-379-09.....	184	2-001-66.....	146	3-001-13.....	147
0-942-51.....	130	0-977-05.....	136	1-379-10.....	184	2-001-67.....	146	3-001-15.....	149
0-942-54.....	130	0-977-10.....	136	1-379-11.....	184	2-001-71.....	146	3-001-16.....	151
0-942-57.....	130	0-977-15.....	136	1-379-12.....	184	2-001-72.....	146	3-001-17.....	148
0-942-58.....	130	0-978-01.....	136	1-388-01.....	142	2-001-73.....	146	3-001-18.....	148
0-942-61.....	130	0-978-05.....	136	1-388-10.....	142	2-017-01.....	144	3-001-19.....	148
0-942-67.....	130	0-979-05.....	137	1-443-92.....	55	2-018-01.....	143	3-001-20.....	146
0-942-71.....	130	0-979-15.....	136	1-558-01.....	143	2-018-10.....	143	3-001-21.....	146
0-942-72.....	130	0-980-01.....	137	1-558-10.....	143	2-020-01.....	142	3-001-22.....	146
0-942-73.....	130	0-980-11.....	136	1-558-99.....	145	2-020-10.....	142	3-001-23.....	146
0-942-74.....	130	0-981-00.....	137	1-559-01.....	143	2-021-00.....	145	3-001-25.....	146
0-942-75.....	130	0-981-05.....	137	1-559-10.....	143	2-021-50.....	145	3-001-26.....	147
0-942-81.....	130	0-981-10.....	136	2-001-01.....	146	2-023-00.....	144	3-001-27.....	148
0-942-82.....	130	0-981-15.....	136	2-001-02.....	146	2-100-01.....	144	3-001-28.....	147
0-942-87.....	130	0-982-00.....	137	2-001-03.....	147	2-100-04.....	144	3-001-29.....	148
0-943-01.....	130	0-982-05.....	137	2-001-04.....	147	2-100-10.....	144	3-001-30.....	148
0-943-02.....	130	0-982-10.....	136	2-001-05.....	146	2-100-99.....	145	3-001-31.....	150
0-943-03.....	130	0-982-15.....	136	2-001-06.....	146	2-102-01.....	143	3-001-32.....	149
0-943-04.....	130	0-983-00.....	137	2-001-07.....	147	2-102-10.....	143	3-001-33.....	149
0-943-05.....	130	0-983-05.....	137	2-001-08.....	147	2-103-01.....	143	3-001-34.....	148
0-943-06.....	130	0-983-10.....	136	2-001-09.....	148	2-103-10.....	143	3-001-35.....	150
0-943-07.....	130	0-983-15.....	136	2-001-10.....	151	2-155-01.....	142	3-001-36.....	149
0-943-08.....	130	0-984-00.....	137	2-001-11.....	151	2-155-10.....	142	3-001-37.....	149
0-943-09.....	130	0-984-05.....	137	2-001-12.....	146	2-224-01.....	143	3-001-38.....	150
0-943-11.....	130	0-985-00.....	137	2-001-13.....	147	2-333-02.....	167	3-001-39.....	146
0-943-15.....	130	0-985-05.....	137	2-001-15.....	149	2-333-03.....	167	3-001-40.....	148
0-943-25.....	130	0-986-00.....	138	2-001-16.....	151	2-333-04.....	167	3-001-41.....	148
0-943-27.....	130	0-986-10.....	138	2-001-17.....	148	2-333-06.....	167	3-001-42.....	150
0-943-40.....	130	0-986-15.....	138	2-001-18.....	148	2-333-09.....	167	3-001-43.....	150
0-943-41.....	130	0-988-00.....	138	2-001-19.....	148	2-333-12.....	167	3-001-44.....	150
0-943-45.....	130	0-989-00.....	138	2-001-20.....	146	2-333-19.....	167	3-001-45.....	146
0-943-75.....	130	0-990-00.....	137	2-001-21.....	146	2-333-25.....	167	3-001-46.....	148
0-944-01.....	131	0-990-05.....	137	2-001-22.....	146	2-388-01.....	142	3-001-47.....	148
0-944-03.....	131	0-993-00.....	133	2-001-23.....	146	2-388-10.....	142	3-001-48.....	146
0-944-05.....	131	0-993-01.....	134	2-001-25.....	146	2-558-01.....	143	3-001-49.....	151

NUMERICAL INDEX

3-001-50	151	3-011-56	158	3-375-35	179	3-982-00	137	4-978-01	136
3-001-51	151	3-011-60	158	3-375-40	179	3-982-05	137	4-978-05	136
3-001-52	148	3-011-61	158	3-376-00	188	3-982-10	136	4-981-10	136
3-003-50	155	3-011-62	158	3-376-01	188	3-982-15	136	4-981-15	136
3-005-18	152	3-011-63	158	3-376-02	188	3-983-00	137	4-982-10	136
3-005-20	153	3-011-64	158	3-376-60	189	3-983-05	137	4-982-15	136
3-005-27	153	3-011-65	158	3-376-85	189	3-983-10	136	4-998-01	135
3-008-21	142	3-011-66	158	3-376-90	189	3-983-15	136	4-999-13	135
3-008-22	142	3-011-95	160	3-378-00	189	3-990-00	137	5-017-01	144
3-008-23	142	3-011-96	160	3-378-13	181	3-993-00	133	5-018-01	143
3-008-24	142	3-011-97	160	3-378-14	181	3-993-01	134	5-100-01	144
3-008-25	142	3-011-98	160	3-378-17	181	3-993-50	134	5-100-04	144
3-008-32	142	3-013-07	162	3-378-85	189	3-997-00	135	5-100-99	145
3-008-33	142	3-013-17	162	3-431-05	140	3-997-60	135	5-102-01	143
3-008-34	142	3-013-21	162	3-431-20	140	3-997-65	135	5-103-01	143
3-008-35	142	3-013-23	162	3-431-35	140	3-999-13	135	5-155-01	142
3-008-42	142	3-111-32	160	3-431-75	140	3-999-63	135	5-372-90	188
3-008-43	142	3-111-33	160	3-432-05	140	4-204-03	139	5-372-99	188
3-008-44	142	3-111-34	160	3-432-20	140	4-204-05	139	5-376-60	189
3-008-45	142	3-111-36	160	3-432-35	140	4-204-06	139	5-376-90	189
3-008-52	142	3-111-38	160	3-432-75	140	4-204-07	139	5-376-99	189
3-008-53	142	3-111-39	160	3-531-05	113	4-204-09	139	5-527-00	172
3-008-54	142	3-111-42	160	3-593-18	235	4-445-06	56	5-528-00	172
3-008-55	142	3-111-43	160	3-609-02	114	4-445-08	56	5-539-51	100
3-008-62	142	3-111-44	160	3-609-04	114	4-445-24	56	5-557-01	171
3-008-63	142	3-111-46	160	3-609-05	114	4-445-60	56	5-557-02	171
3-008-64	142	3-111-48	160	3-609-10	114	4-445-95	56	5-557-04	171
3-008-65	142	3-111-49	160	3-696-13	184	4-445-96	56	5-557-05	171
3-008-66	142	3-330-38	164	3-726-30	249	4-445-97	56	5-557-07	171
3-008-73	142	3-330-40	164	3-727-08	246	4-445-98	56	5-557-08	171
3-008-74	142	3-330-42	164	3-727-12	243	4-531-11	113	5-557-09	171
3-008-75	142	3-330-46	164	3-727-13	244	4-531-13	113	5-557-48	171
3-008-76	142	3-330-51	164	3-727-18	246	4-531-18	113	5-558-01	143
3-008-77	142	3-330-55	164	3-727-24	243	4-609-54	114	5-558-99	145
3-010-61	155	3-330-58	164	3-727-25	244	4-727-18	246	5-559-01	143
3-010-62	155	3-331-36	164	3-727-51	249	4-728-14	247	5-591-50	190
3-010-63	155	3-331-38	164	3-727-52	249	4-775-94	20	5-592-00	172
3-010-64	155	3-331-40	164	3-727-53	249	4-775-96	40	5-615-00	172
3-010-65	155	3-331-42	164	3-727-54	250	4-775-97	42	5-661-12	176
3-010-66	155	3-331-46	164	3-727-56	250	4-775-98	42	5-661-18	176
3-010-67	155	3-331-51	164	3-727-57	250	4-776-51	13	5-661-24	176
3-010-68	155	3-331-55	164	3-727-58	250	4-776-52	13	5-662-12	176
3-010-69	155	3-331-58	164	3-727-70	245	4-776-53	13	5-662-18	176
3-011-02	161	3-333-02	167	3-728-12	247	4-776-54	13	5-662-24	176
3-011-03	161	3-333-03	167	3-728-13	248	4-776-55	13	5-684-01	293
3-011-04	161	3-333-04	167	3-728-15	247	4-776-56	13	5-692-09	217
3-011-05	161	3-333-06	167	3-728-24	247	4-776-58	12	5-692-16	217
3-011-06	161	3-333-09	167	3-728-25	248	4-776-60	12	5-692-19	217
3-011-12	161	3-333-12	167	3-728-30	249	4-776-65	12	5-692-66	217
3-011-13	161	3-333-19	167	3-728-31	249	4-776-70	12	5-693-09	217
3-011-14	161	3-333-25	167	3-728-32	250	4-776-81	30	5-693-16	217
3-011-15	161	3-333-38	167	3-728-33	250	4-776-83	40	5-693-19	217
3-011-16	161	3-372-02	179	3-728-34	250	4-776-84	40	5-693-66	217
3-011-21	153, 161	3-372-03	179	3-729-00	254	4-776-85	40	5-693-69	217
3-011-22	153, 161	3-372-04	179	3-729-01	254	4-776-86	40	5-693-98	221
3-011-23	153, 161	3-372-05	179	3-729-03	254	4-776-87	40	5-693-99	221
3-011-24	153, 161	3-372-07	179	3-729-04	254	4-776-98	39	5-698-01	293
3-011-32	160	3-372-10	179	3-951-00	132	4-932-17	128	5-698-18	293
3-011-33	160	3-372-15	179	3-951-50	132	4-936-01	129	5-791-XX	112
3-011-34	160	3-372-20	179	3-952-51	132	4-936-05	129	5-792-XX	112
3-011-36	160	3-372-25	179	3-953-00	132	4-937-01	129	6-017-01	144
3-011-38	160	3-372-30	179	3-953-50	132	4-937-03	129	6-018-01	143
3-011-39	160	3-372-90	188	3-953-52	132	4-937-05	129	6-100-01	144
3-011-42	160	3-372-99	188	3-976-10	136	4-940-01	129	6-100-04	144
3-011-43	160	3-375-01	179	3-976-15	136	4-940-05	129	6-100-99	145
3-011-44	160	3-375-02	179	3-977-01	136	4-945-01	131	6-102-01	143
3-011-46	160	3-375-03	179	3-977-05	136	4-945-05	131	6-103-01	143
3-011-48	160	3-375-04	179	3-977-10	136	4-946-01	131	6-155-01	142
3-011-49	160	3-375-05	179	3-977-15	136	4-946-05	131	6-388-01	142
3-011-50	158	3-375-07	179	3-978-01	136	4-952-00	133	6-558-01	143
3-011-51	158	3-375-10	179	3-978-05	136	4-953-00	132	6-558-99	145
3-011-52	158	3-375-15	179	3-979-15	136	4-953-50	132	6-559-01	143
3-011-53	158	3-375-20	179	3-980-11	136	4-953-52	132	7-00H-11	93, 98
3-011-54	158	3-375-25	179	3-981-10	136	4-976-10	136	7-00H-11A	93, 98
3-011-55	158	3-375-30	179	3-981-15	136	4-976-15	136	7-001-49	93, 94

NUMERICAL INDEX

7-001-50.....	93, 94	7-005-07.....	93, 97	8-003-82WA.....	92, 97	L-001-49-R.....	93, 94	L-004-48-B.....	92, 98
7-002-07.....	92, 94	7-005-08.....	93, 97	8-004-33C.....	92, 95	L-001-49-W.....	93, 94	L-004-48-W.....	92, 98
7-002-09.....	92, 94	7-005-66.....	92, 94	8-004-33D.....	92, 95	L-001-49-Y.....	93, 94	L-004-72-B.....	92, 98
7-002-33.....	92, 94	7-005-66A.....	93, 94	8-004-33E.....	93, 95	L-002-07-B.....	92, 94	L-004-72-W.....	92, 98
7-002-39.....	92, 96	7-005-67.....	92, 95	8-004-34.....	92, 96	L-002-07-R.....	92, 94	L-004-99-W.....	92, 99
7-002-41.....	93, 94	7-005-81.....	92, 95	8-004-34F.....	93, 96	L-002-07-W.....	92, 94	L-005-01-B.....	92, 97
7-002-42.....	93, 96	7-005-81A.....	93, 95	8-004-48.....	92, 98	L-002-07-Y.....	92, 94	L-005-01-R.....	92, 97
7-002-45.....	92, 94	7-005-84.....	92, 95	8-004-53.....	92, 98	L-002-33-B.....	92, 94	L-005-01-W.....	92, 97
7-002-46.....	93, 94	7-008-74.....	93, 94	8-004-60.....	93, 98	L-002-33-R.....	92, 94	L-005-01-Y.....	92, 97
7-002-49.....	93, 94	7-008-75.....	93, 94	8-004-66.....	93, 98	L-002-33-W.....	92, 94	L-005-07-B.....	93, 97
7-002-65.....	92, 96	7-008-96.....	92, 99	8-004-72.....	92, 98	L-002-33-Y.....	92, 94	L-005-07-R.....	93, 97
7-002-74.....	93, 96	7-009-21B.....	92, 97	8-004-75.....	93, 98	L-002-39-B.....	92, 96	L-005-07-W.....	93, 97
7-002-76.....	93, 96	7-090-05.....	93, 98	8-004-99.....	92, 99	L-002-39-R.....	92, 96	L-005-07-Y.....	93, 97
7-002-86.....	92, 97	7-090-06.....	93, 98	8-004-99A.....	93, 99	L-002-39-W.....	92, 96	L-005-81-R.....	93, 97
7-002-88.....	92, 94	7-999-12.....	93, 296	8-005-01.....	92, 97	L-002-39-Y.....	92, 96	L-005-08-TY.....	93, 96
7-002-89.....	93, 94	7-999-24.....	93, 296	8-005-01A.....	92, 97	L-002-41-W.....	93, 94	L-005-08-W.....	93, 97
7-003-34.....	93, 95	8-00H-11.....	93, 98	8-005-04.....	92, 97	L-002-41-Y.....	93, 94	L-005-66-W.....	92, 94
7-003-45.....	93, 94	8-00H-11A.....	93, 98	8-005-05.....	93, 97	L-002-42-B.....	93, 96	L-005-81-Y.....	92, 95
7-003-46.....	93, 94	8-001-49.....	93, 94	8-005-07.....	93, 97	L-002-42-R.....	93, 96	L-090-05-W.....	93, 98
7-003-80.....	92, 95	8-001-50.....	93, 94	8-005-66.....	92, 94	L-002-42-W.....	93, 96	L-090-06-W.....	93, 98
7-003-80W.....	92, 97	8-002-07.....	92, 94	8-005-66A.....	93, 94	L-002-46-W.....	93, 94	SIGN01.....	297
7-003-82.....	92, 94	8-002-09.....	92, 94	8-005-67.....	92, 95	L-002-49-B.....	93, 94	SIGN02.....	297
7-003-82W.....	92, 97	8-002-33.....	92, 94	8-005-81.....	92, 95	L-002-49-W.....	93, 94	SIGN03.....	297
7-003-82WA.....	92, 97	8-002-39.....	92, 96	8-005-81A.....	93, 95	L-002-69-B.....	92, 96	STAND03.....	297
7-004-33C.....	92, 95	8-002-41.....	93, 94	8-005-84.....	92, 95	L-002-69-R.....	92, 96	STAND05.....	297
7-004-33D.....	92, 95	8-002-42.....	93, 96	8-008-74.....	93, 94	L-002-69-W.....	92, 96	STAND06.....	296
7-004-33E.....	93, 95	8-002-45.....	92, 94	8-008-75.....	93, 94	L-002-86-B.....	92, 97	STAND07.....	296
7-004-34.....	92, 96	8-002-46.....	93, 94	8-008-96.....	92, 99	L-002-86-R.....	92, 97	STAND08.....	297
7-004-34F.....	93, 96	8-002-49.....	93, 94	8-009-21B.....	92, 97	L-002-86-TB.....	92, 96	STAND09.....	297
7-004-48.....	92, 98	8-002-65.....	92, 96	8-090-05.....	93, 98	L-002-86-TW.....	92, 96	STAND10.....	296
7-004-53.....	92, 98	8-002-74.....	93, 96	8-090-06.....	93, 98	L-002-86-W.....	92, 97	STAND11.....	297
7-004-60.....	93, 98	8-002-76.....	93, 96	L-0C2-33-W.....	92, 94	L-003-34-W.....	93, 95	STAND12.....	296
7-004-66.....	93, 98	8-002-88.....	92, 94	L-0C2-39-W.....	92, 96	L-003-34-Y.....	93, 95	STAND16.....	297
7-004-72.....	92, 98	8-002-89.....	93, 94	L-0C4-33CW.....	92, 95	L-003-80-R.....	92, 95	STAND17.....	297
7-004-75.....	93, 98	8-003-34.....	93, 95	L-0C5-01-W.....	92, 97	L-003-80-W.....	92, 95	STAND18.....	296
7-004-99.....	92, 99	8-003-45.....	93, 94	L-00G-41-W.....	92, 96	L-003-80-WW.....	92, 97	STAND19.....	296
7-004-99A.....	93, 99	8-003-46.....	93, 94	L-00H-08-W.....	93, 99	L-003-82-B.....	92, 94		
7-005-01.....	92, 97	8-003-80.....	92, 95	L-00H-09-W.....	93, 99	L-003-82-R.....	92, 94		
7-005-01A.....	92, 97	8-003-80W.....	92, 97	L-00H-10-W.....	93, 99	L-003-82-W.....	92, 94		
7-005-04.....	92, 97	8-003-82.....	92, 94	L-00H-11-B.....	93, 98	L-003-82-WW.....	92, 97		
7-005-05.....	93, 97	8-003-82W.....	92, 97	L-00H-11-W.....	93, 98	L-003-82-Y.....	92, 94		

NOTES

[illegible]

DURITE®

catalogue 2022

durite.co.uk

OUR COMMITMENT

- + Reliable, high-quality Durite parts
- + Dedicated & qualified technical support
- + Competitive pricing
- + Exceptional stock availability
- + Outstanding customer service



Durite Limited
Durite Works, Valley Road
Dovercourt, CO12 4RX
Essex, England



+44 (0) 1255 555200

+44 (0) 1255 555222

sales@durite.co.uk



www.durite.co.uk

Durite is a Safe Fleet Brand



THE TRUSTED QUALITY BRAND FOR PROFESSIONALS



We're on social media.
Follow us @DuriteLimited