



Geberit Duofix element for wall-hung WC, 112 cm, with Sigma concealed cistern 12 cm



APPLICATION PURPOSES

- For metal and wood frame walls
- For Geberit Duofix system walls
- For installation in part- or room-height prewalls
- For installation in room-height partition walls
- For floor constructions 0–25 cm
- For wall-hung WCs

CHARACTERISTICS

- 2025 range
- Statically self-supporting frame, protected against corrosion with powder coating
- Frame for wall-hung WCs with connection dimensions as per EN 33 and projection up to 70 cm
- With pull-out plate for lateral fastening above the element on metal or wood profiles or on Geberit Duofix system studs
- Alternative fastening point for wall anchors
- Rotating foot plates, suitable for installation in U profiles UW 50 and UW 75
- Foot plates that can be mounted in Geberit Duofix system rail without tools, without additional components
- Galvanised non-slip leg supports protected against corrosion
- Connection bend can be mounted without tools at different depths, adjustable range 45 mm
- Geberit Sigma concealed cistern 12 cm, fully insulated against condensation

- Cistern fulfils standard requirements in accordance with EN 14055, Class II
- For front actuation, suitable for single, dual and stop-and-go flushes
- Immediate post flush possible with factory setting
- Tool-free installation and maintenance work on concealed cistern
- Water supply connection on the rear or top centre
- Protection box for service opening, can be cut to length, protects against moisture and dirt
- With conduit pipe for feed pipe for Geberit AquaClean shower toilets and for connection cable
- Fastening for electrical connection and Power & Connect Box

TECHNICAL DATA

Flow pressure	0.1–10 bar
Operating temperature, water max.	25 °C
Flush volume, factory setting	5.8 / 3 l
Flush volume small, adjustment range	2–4 l
Product material	Steel

SCOPE OF DELIVERY

- Water supply connection R 1/2", compatible with MasterFix and MeplaFix, with integrated angle stop valve and hand wheel

- Protection box for service opening
- 2 wall anchors
- Connection set for WC, ø 90 mm
- Connection bend 90° made of PE-HD, ø 90 mm
- Adaptor socket made of PE-HD, ø 90 / 110 mm
- Fastening and protection material

ACCESSORIES


- Geberit Duofix set of wall anchors for single installation, corner construction
- Geberit Duofix set of wall anchor extensions
- Geberit Duofix system fastening bracket
- Geberit Duofix fastening material for stud clearance 50–57.5 cm
- Geberit Duofix set of foot fastener on rear wall
- Geberit set of support brackets for WC ceramic appliances with small contact surfaces
- Geberit sound insulation set for wall-hung WC
- Geberit Duofix set of foot extensions 20 cm length
- Geberit drilling template for wall-hung WC and Geberit AquaClean
- Insert for Geberit DuoFresh stick, for Sigma concealed cistern 12 cm
- Geberit DuoFresh insert for stick, for Sigma concealed cistern 12 cm
- Geberit DuoFresh module with manual actuation, for Sigma concealed cistern 12 cm

- Geberit DuoFresh module with manual actuation and insert for Geberit DuoFresh stick, for Sigma concealed cistern 12 cm
- Geberit DuoFresh module with automatic actuation, for Sigma concealed cistern 12 cm
- Geberit DuoFresh module with automatic actuation and insert for Geberit DuoFresh stick, for Sigma concealed cistern 12 cm

Art. no.	B cm	H cm	T cm
111.383.00.6 New	50	112	12

New article available from 01.05.2025

Geberit Smyle Square wall-hung WC, washdown, shrouded, Rimfree

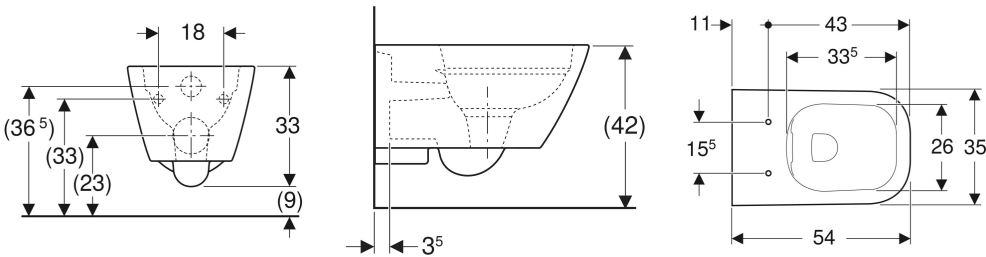

APPLICATION PURPOSES

- For concealed cisterns
- For pressure flushing valves

CHARACTERISTICS

- Wall-hung
- Washdown WC
- Rimless WC ceramic appliance featuring Rimfree flush technology

- Easy fastening with Easy Fast Fixing (type EFF3)
- Type 1, full flush volume 6 / 5 / 4 l, in accordance with EN 997
- 4 l flush
- Shrouded
- Hidden fastening

TECHNICAL DATA

Product material	Vitreous china
Fastening distance	18 cm

SCOPE OF DELIVERY


- Fastening material

TO ORDER ADDITIONALLY

- WC seat

Art. no.	Colour / surface	B cm	H cm	T cm	Outlet
500.208.01.1	white	35	33	54	horizontal

Geberit Smyle Square WC seat, slim design

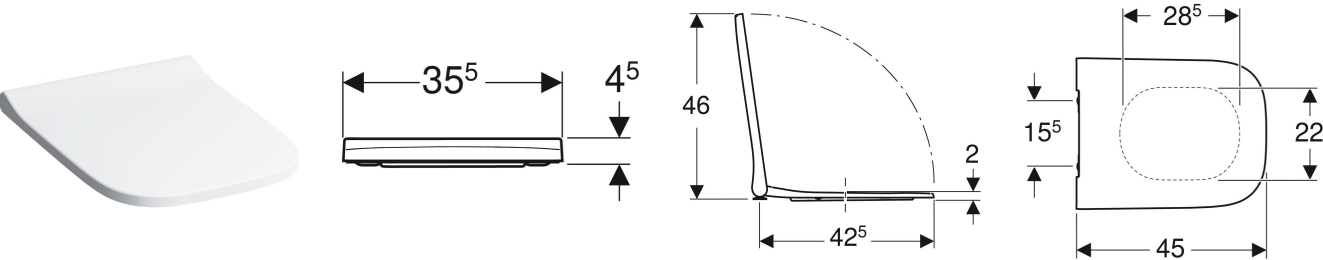

Example image

CHARACTERISTICS


- Antibacterial
- Narrow design

- Overlapping WC lid

TECHNICAL DATA

Product material	Duroplast
Fastening distance	15.5 cm

Art. no.	Colour / surface	B cm	H cm	T cm	Quick-release hinges	Soft-closing mechanism	Fastening	Hinge material
500.237.01.1	white / glossy	35.5	4.5	45	no	yes	from above	Brass chrome-plated
500.238.01.1	white / glossy	35.5	4.5	45	no	no	from above	Brass chrome-plated
500.687.01.1	white / glossy	35.5	4.5	45	yes	yes	from above	Brass chrome-plated

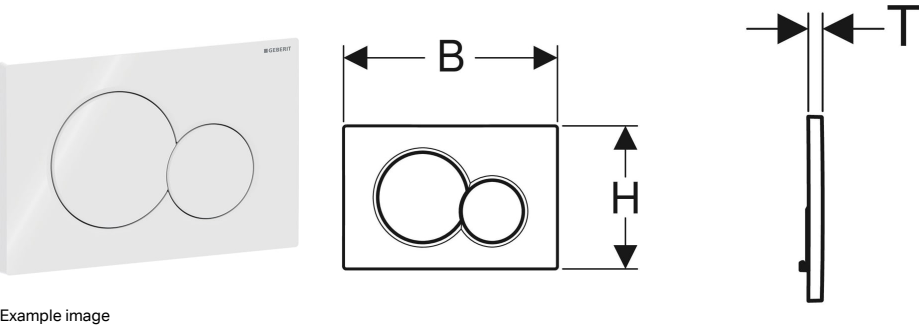

Example image

APPLICATION PURPOSES

- For flush actuation with Sigma concealed cisterns

CHARACTERISTICS

- Front actuation
- Sound-absorbing actuator rods, tool-free fast adjustment

TECHNICAL DATA

Actuation force max.	20 N
Button shape	round

SCOPE OF DELIVERY

- Mounting frame
- 2 distance bolts
- 2 actuator rods

ACCESSORIES

- Geberit DuoFresh module with automatic actuation, for Sigma concealed cistern 12 cm
- Geberit DuoFresh module with automatic actuation and insert for Geberit DuoFresh stick, for Sigma concealed cistern 12 cm
- Geberit DuoFresh module with manual actuation, for Sigma concealed cistern 12 cm
- Geberit DuoFresh module with manual actuation and insert for Geberit DuoFresh stick, for Sigma concealed cistern 12 cm

- Geberit DuoFresh module with automatic actuation, for Sigma concealed cistern 8 cm
- Geberit DuoFresh module with automatic actuation and insert for Geberit DuoFresh stick, for Sigma concealed cistern 8 cm
- Geberit DuoFresh module with manual actuation, for Sigma concealed cistern 8 cm
- Geberit DuoFresh module with manual actuation and insert for Geberit DuoFresh stick, for Sigma concealed cistern 8 cm
- Insert for Geberit DuoFresh stick, for Sigma concealed cistern 12 cm
- Insert for Geberit DuoFresh stick, for Sigma concealed cistern 8 cm
- Geberit extension set for Sigma, Omega and Kappa concealed cisterns

Art. no.	Colour / surface	Product material	B cm	H cm	T cm
115.770.11.5	white	Plastic	24.6	16.4	1.3

<i>Art. no.</i>	<i>Colour / surface</i>	<i>Product material</i>	<i>B</i> cm	<i>H</i> cm	<i>T</i> cm
115.770.21.5	chrom / glossy	Plastic	24.6	16.4	1.3
115.770.DT.5	fine brass galvanized	Plastic	24.6	16.4	1.3
115.770.DW.5	black	Plastic	24.6	16.4	1.3
115.770.JQ.5	chrom / matt, easy-to-clean-beschichtet	Plastic	24.6	16.4	1.3
115.770.KA.5	Plate: gloss chrome-plated Buttons: matt chrome-plated	Plastic	24.6	16.4	1.3