


Geberit CleanLine80 shower channel

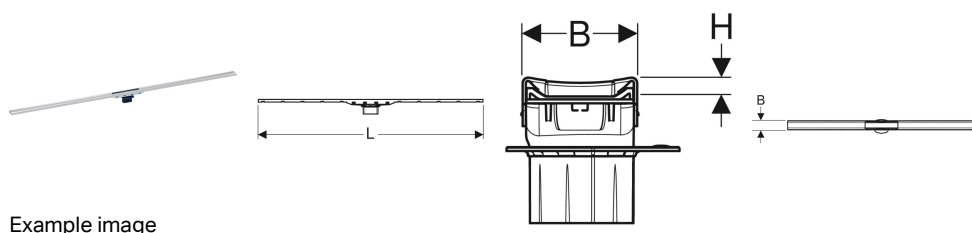

Example image

Application purposes

- For drainage of floor-even showers
- For installation in the room or on the wall
- For installation in thin bed mortar
- For composite seals
- Suitable for less-abled installation

Characteristics

- Quality-monitored in accordance with EN 1253-3
- With integrated slope

- Shower channel can be cut to length
- Suitable for tile structures on floor from 10–35 mm
- Shower channel can be aligned in height, inclination and offset
- Easy cleaning
- Water drainage above the composite seal
- Water drainage above the finished floor when using the sleeve
- Load-bearing capacity, class K 3 (3 kN)
- With anti-fingerprint coating

Technical data

Product material | CrNiMo steel 1.4404 (EN 10088)

Scope of delivery

- Comb insert
- Inlet connection piece with compensation ring
- Suction cup
- Sleeve

To order additionally

- Installation set for shower channels of the CleanLine series

Art. no.	Colour / surface	L	B	H
154.440.KS.1	Frame: stainless steel polished, coated Surface: brushed stainless steel, coated	30-90 cm	4.4 cm	1 cm
154.440.39.1	Frame: champagne / polished, coated Surface: champagne / brushed, coated	30-90 cm	4.4 cm	1 cm
154.441.KS.1	Frame: stainless steel polished, coated Surface: brushed stainless steel, coated	30-130 cm	4.4 cm	1 cm
154.441.39.1	Frame: champagne / polished, coated Surface: champagne / brushed, coated	30-130 cm	4.4 cm	1 cm
154.440.QC.1	Frame: black chrome / brushed, coated Surface: black chrome / brushed, coated	30-90 cm	4.4 cm	1 cm
154.441.QC.1	Frame: black chrome / brushed, coated Surface: black chrome / brushed, coated	30-130 cm	4.4 cm	1 cm



- Natural stone tiles in the shower area may discolour