
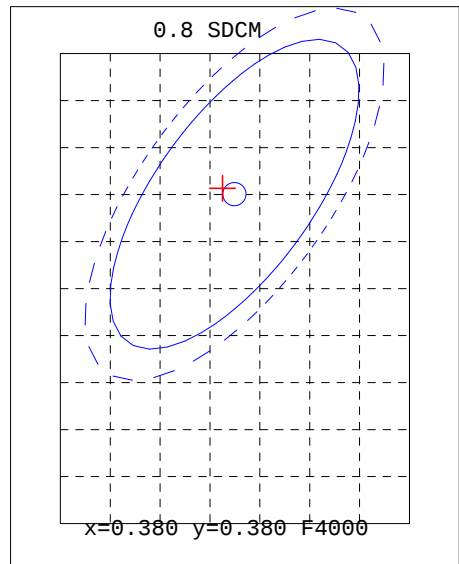


Light Source Test Report

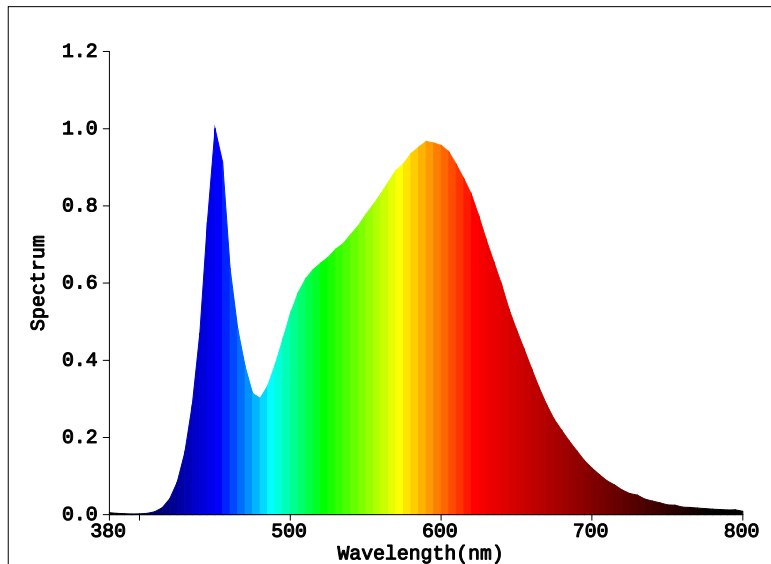

Color Parameters:

Chromaticity Coordinate: $x=0.3790$ $y=0.3805$ Chromaticity Coordinate: $u'=0.2227$ $v'=0.5030$ ($duv=2.18e-03$)

Tc=4065K Dominant WL:Ld=577.6nm Purity=27.9% Centroid WL:568.0nm

Ratio: R=19.5% G=77.1% B=3.4% Peak WL:Lp=450.0nm HWL:23.9nm

Render Index: Ra=83.2

R1 =81	R2 =90	R3 =96	R4 =82	R5 =82	R6 =86	R7 =86	
R8 =64	R9 =6	R10=76	R11=81	R12=64	R13=83	R14=98	R15=74

Photo Parameters:

Flux: 894.11 lm Fe: 2.7043 W Efficacy:92.26 lm/W

Electrical Parameters:

Luminaire: U=231.0V I=0.05376A P=9.691W PF=0.7805

Instrument Status:

Scan Range:380.0nm-800.0nm Interval:5.0nm[0]
REF=12976(R=3) %=-0.116%Ip=23469(G=5,D=49)
PMT: 15.7 centigrade [16.3]

Product Type:140长方形LED双向壁灯皱白	Manufacturer:
Number:1.01904	Test Department:UTEC
Temperature:25.3 deg	Humidity:65.0%
Test Operator:YZB	Test Date:2021-01-15 14:29:59
Software:V2.00.122	Instrument:PMS-80_V1 (SN:YG107113N11110033)